


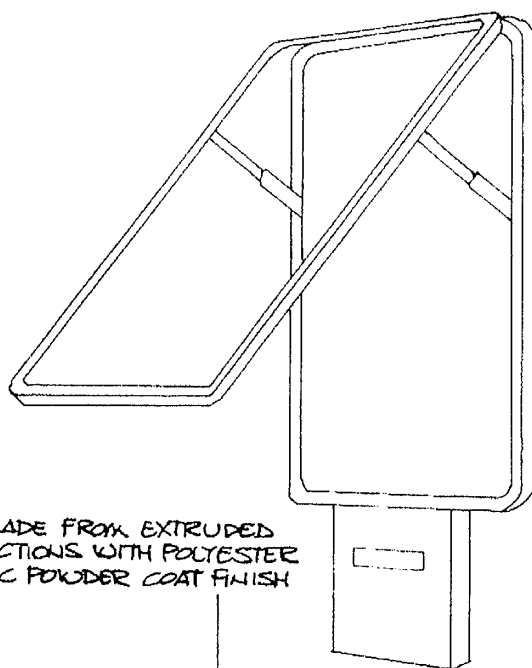

RECEIVED
07 MAR 2008

DISPLAY CASE MADE FROM EXTRUDED
ALUMINIUM SECTIONS WITH POLYESTER
ELECTRO-STATIC POWDER COAT FINISH

ELECTRICS-

3 x 58W FLUORESCENT
LAMPS OPERATED BY
1x SINGLE & 1x DOUBLE
BALAST COMPLETE WITH
HIGH FREQUENCY RCD/MCB
TRIP SWITCH & PHOTOCELL
LIGHT SENSOR

6mm TOUGHENED GLASS WITH
3mm THICK FLOW DIFFUSER
FOR DISPLAY SUPPORT

SPECIFICATION DRAWING 1:20


135mm



1905mm

600mm

1155mm
1310mm

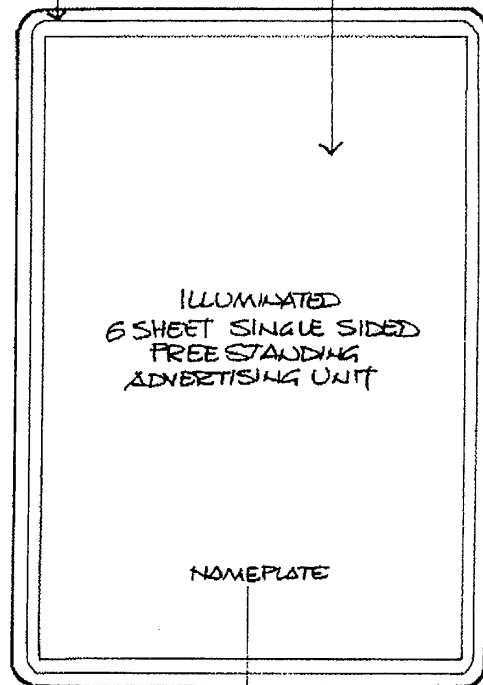


1755mm


ILLUMINATED
6 SHEET SINGLE SIDED
FREE STANDING
ADVERTISING UNIT

NOMEPATE

650mm



Cross Section of Internally Illuminated 6 Sheet Panel

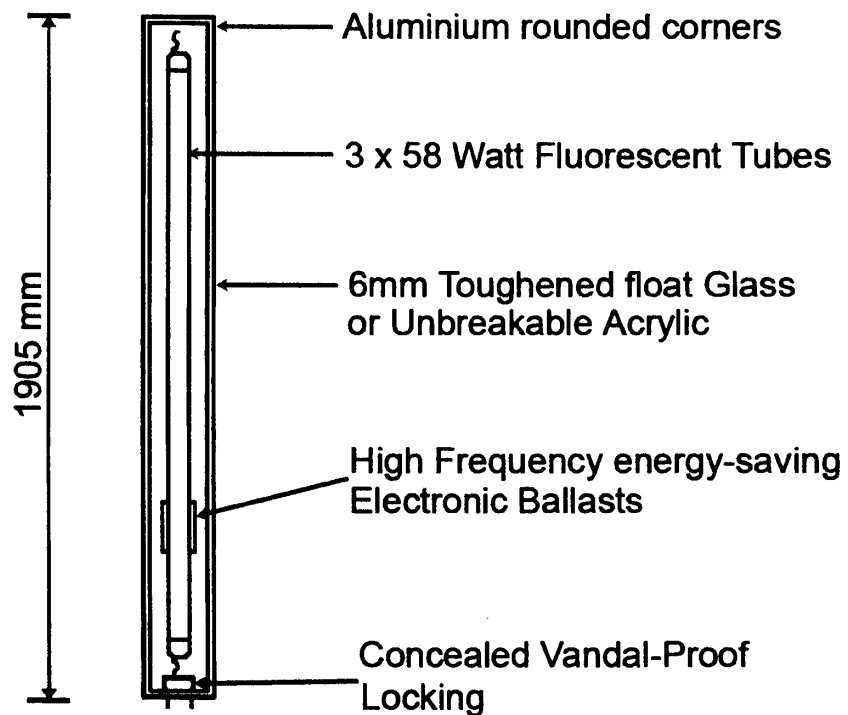

Additional Information:

Lighting Regime: dusk 'til dawn. Activated via light sensitive photo cell.

Exterior frame colour: Dark brown (RAL 8080)

Maximum illumination: 658 Candelas / m²