



PROPOSED (PART) PLAN 1:50

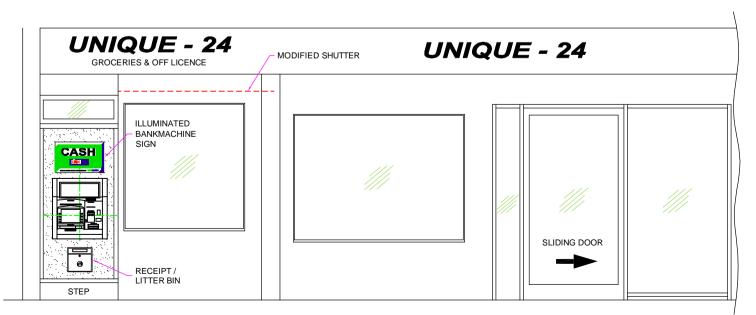

UNIQUE - 24 MODIFIED SHUTTER **GROCERIES & OFF LICENCE** ILLUMINATED **BANKMACHINE SIGN** CASH RECEIPT / LITTER BIN

PROPOSED (PART) ELEVATION 1:25

STEP



SECTION AT ATM LOCATION 1:50

BUILDING REGULATION PURPOSES

GENERAL NOTES

ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES, GLARE FROM LIGHTING TO BE AVOIDED

ACCESS TO ATM:

COMFORTABLE SIDE REACH CONTOURS FOR WHEELCHAIR USERS TO COMPLY WITH FIGURE 10 OF THE DOCUMENT "ACCESS TO ATM'S UK DESIGN GUIDLINES 2002".

COMFORTABLE VIEWING ANGLES FOR AMBULANT DISABLED PERSONS TO COMPLY TO FIGURE 4 OF THE DOCUMENT "ACCESS TO ATM'S UK GUIDLINES

COMFORTABLE VIEWING ANGLES AND REACH CONTOURS FOR NON DISABLED PEOPLE TO COMPL WITH FIGURE 15 OF THE DOCUMENT "ACCESS TO ATM'S UK GUIDLINES 2002".

SIGNAGE:
ALL SIGNAGE TO CONFORM TO BS 8300:2001
SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS &
INFORMATION AND 9.2.3 VISUAL SIGNS.

FLOOR TYPE: VINYL TILES ON TIMBER,

STOCK & SHELVING TO BE REMOVED BY OTHERS,

EXISTING DOOR TO BE REMOVED, MODIFY SHUTTER / NEW INFILL PANEL, LAMINATE PANEL WITH SECURITY BACKING, ELECTRICS, PLINTH, ATM, CTS SECURITY ENCLOSURE TO BE INSTALLED.

APERTURE TO BE FORMED IN LAMINATE PANEL WIT SECURITY BACKING.

LAMINATE PANEL
A 9MM MDF CORE, FACED FORMICA LAMINATE,
COMPENSATING LAMINATE TO REVERSE
WALL CONSTRUCTION (SECURITY BACKING)
100X50MM STUDS @ 400MM CENTRES CLAD WITH
EXPAMET MESH (1282F)
+ 18MM MDF (SCREWED) + PLASTERBOARD (INTERNALLY)





ENTRANCE

UNIQUE 24, 133A-135 GREYS INN ROAD, LONDON,

PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR BANK MACHINE

JWP	16/1/08	VARIOUS
REF/DRG NO. F004304	SHEET 1	REVISION



PROPOSED ELEVATION 1:50