


A1 and A2 - ALC Wall Mounting Linear Uplight with Microlight-Technology Lamp for top floor facade, available in 16W or 37W and with warm white or very warm white light. The minimal line body is extruded aluminium 60mm x 60mm with side-mounted power pack. Dimmable modules as options. Nominal life of 20,000 hours.



C and D - ALC Veola Compact Architectural Spotlight 6° with 35W/70W warm white metal halide for column lighting, with spread lens for facade and ledge line lighting. With filter colour as an option.

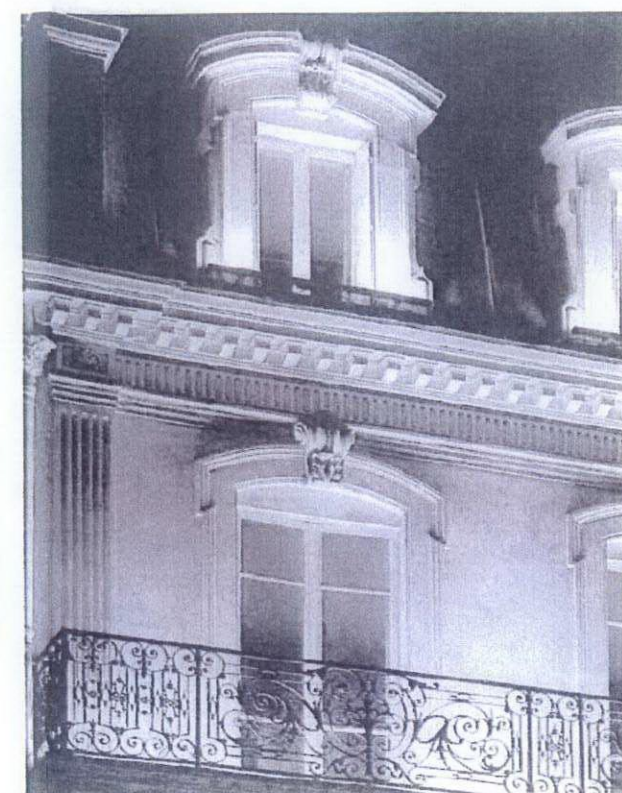

B - ALC Veola Compact Architectural Spotlight 6° with 3x1W LED in warm white for figure lighting. Lamp life expectation of 100,000 hr.



F - ALC Miniature Fixed Uplight for 3x1W LED in warm white for entrance lighting. Fitted with walk-on 6mm tough glass lens. Lamp life expectation of 100,000 hr.

## Facade Lighting Proposal