



# Specifications

## Outdoor units

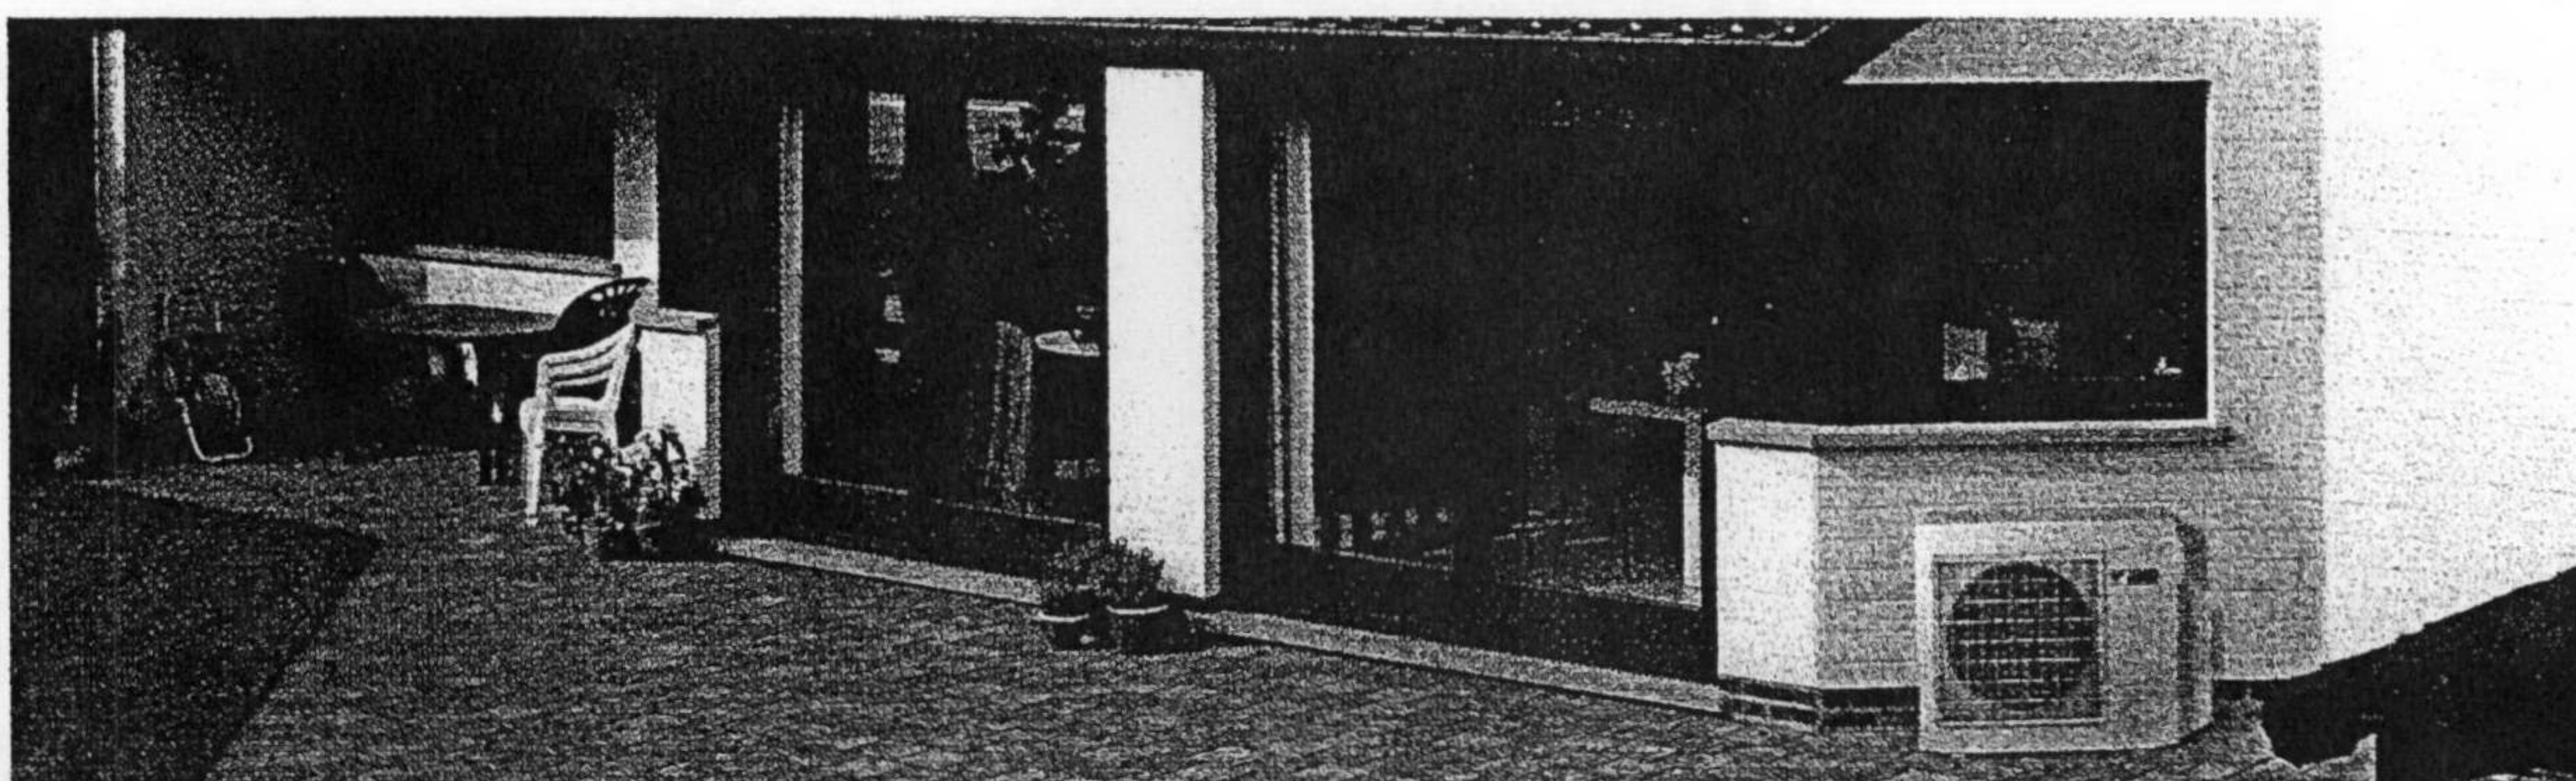

## MK/XS-D

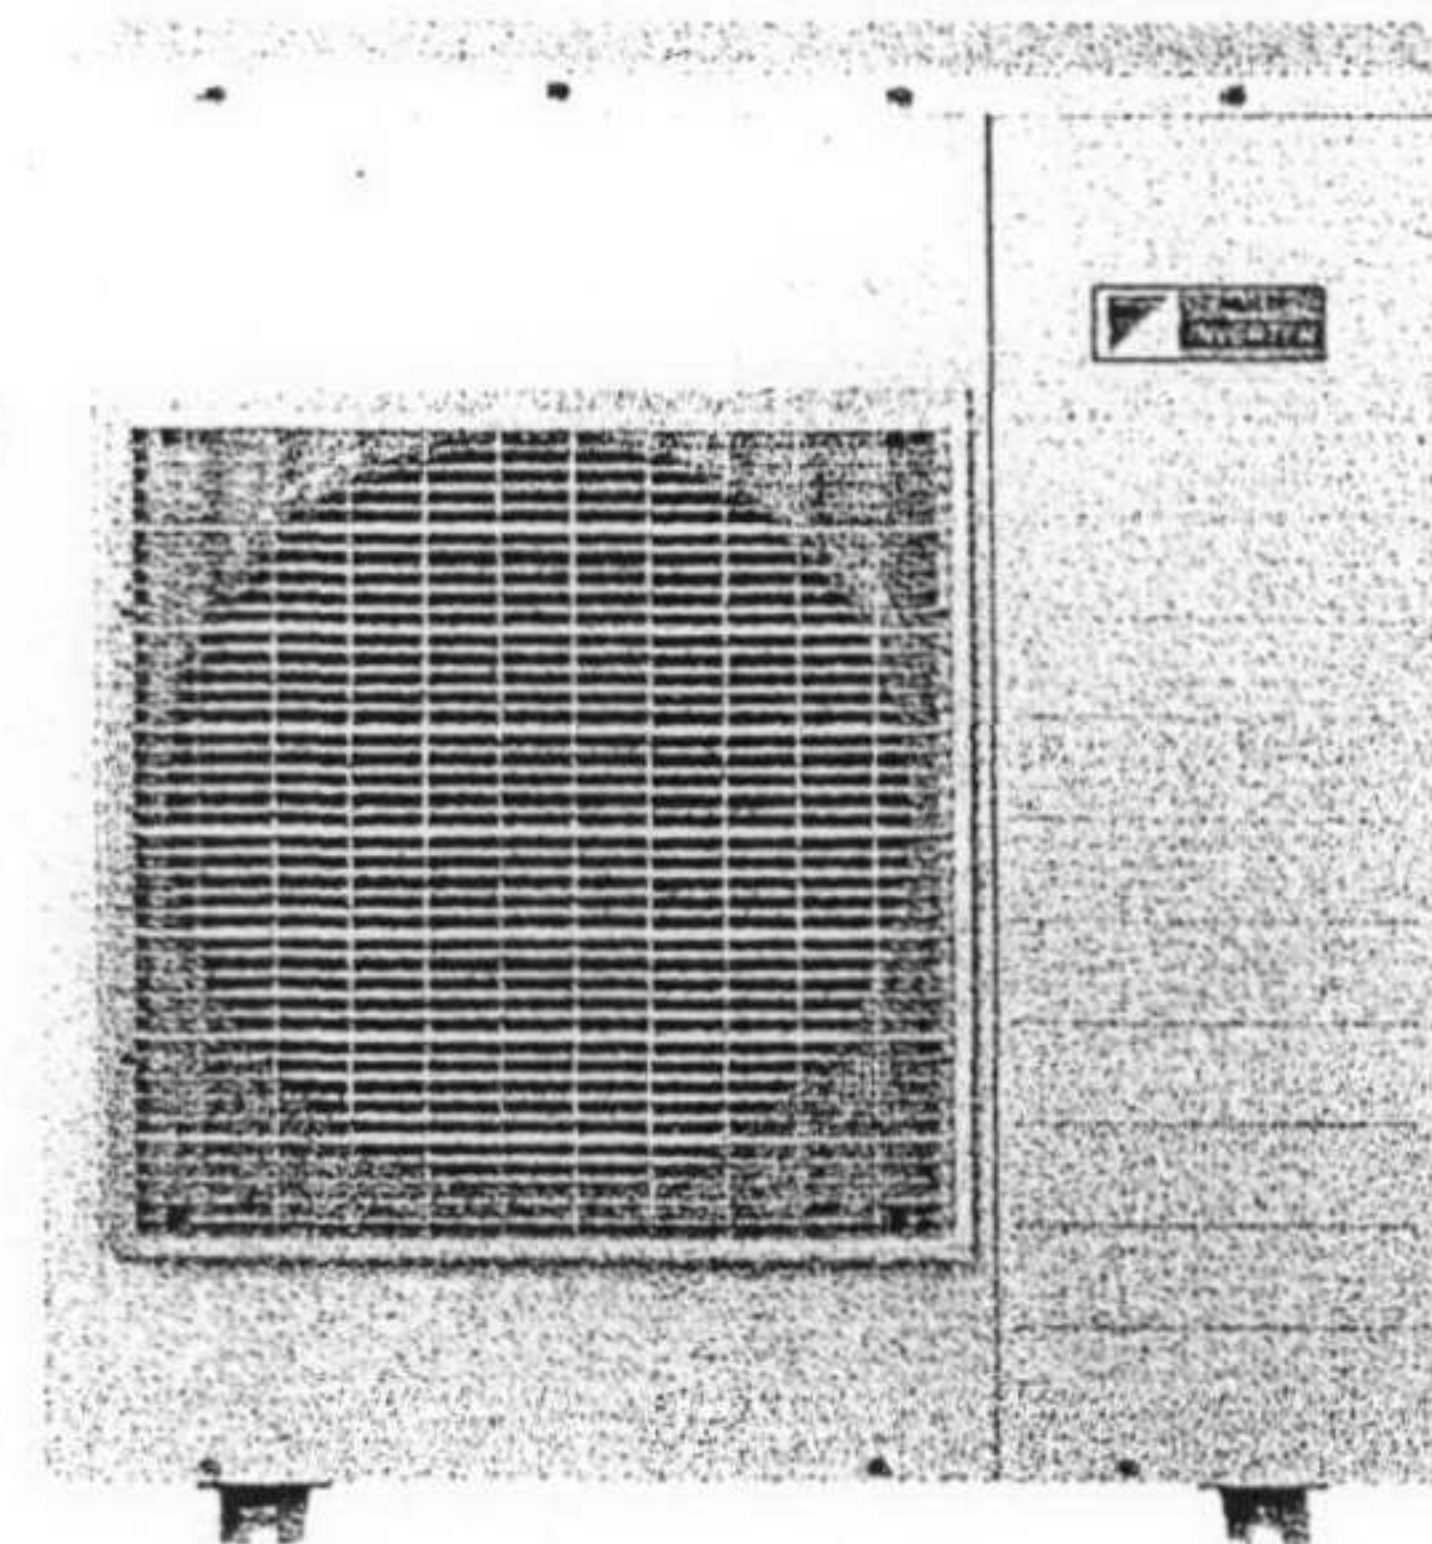

- The Multi model application saves on outside space. The single outdoor unit can stand in the garden against an outside wall, or on the roof or terrace. Thus only enough space for 1 outdoor unit is required. This is aesthetically pleasing and simplifies installation.
- Daikin outdoor units are neat, sturdy and specially anti-corrosion treated to withstand severe weather conditions. They are fitted with a swing compressor, renowned for its low noise and high energy efficiency. Outdoor units are guaranteed not to disturb the peace and quiet of the neighbourhood.
- Multi inverter controlled outdoor units can operate with 2, 3 or 4 indoor units.

## MKS-D

| MULTI - COOLING ONLY        |                            |     |       | 2MKS40DVMB                     | 3MKS50DVMB  | 4MKS58DVMB | 4MKS75DVMB | 4MKS90DVMB  |
|-----------------------------|----------------------------|-----|-------|--------------------------------|-------------|------------|------------|-------------|
| Dimensions                  | HxWxD                      |     | mm    | 640x685x285                    | 735x936x300 |            |            | 908x900x320 |
| Weight                      |                            |     | kg    | 39                             | 55          | 55         | 58         | 66          |
| Casing colour               |                            |     |       | ivory white                    |             |            |            |             |
| Sound pressure level        |                            | H/L | dB(A) | 47/43                          | 46/*        | 46/*       | 48/*       | 48/*        |
| Sound power level           |                            | H   | dB(A) | 62                             | 59          | 59         | 61         | 61          |
| Compressor                  |                            |     |       | hermetically sealed swing type |             |            |            |             |
| Refrigerant type            |                            |     |       | R-410A                         |             |            |            |             |
| Amount of additional charge |                            |     | kg/m  | 0.02 (20m or more)             | chargeless  |            |            |             |
| Maximum piping length       | for total of each room     |     | m     | 30                             | 45          | 45         | 60         | 70          |
|                             | for one room               |     | m     | 20                             | 25          |            |            |             |
| Maximum level difference    | between indoor and outdoor |     | m     | 15                             |             |            |            |             |
|                             | between indoor units       |     | m     | 7.5                            |             |            |            |             |
| Standard operation range    | from ~ to                  |     | °CDB  | +10 ~ 46                       | -10 ~ 46    |            |            |             |

## MXS-D

| MULTI - HEAT PUMP           |                            |           |       | 2MXS40DVMB                     | 2MXS52DVMB  | 3MXS52DVMB | 4MXS68DVMB | 4MXS80DVMB  |
|-----------------------------|----------------------------|-----------|-------|--------------------------------|-------------|------------|------------|-------------|
| Dimensions                  | HxWxD                      |           | mm    | 640x685x285                    | 735x936x300 |            |            | 908x900x320 |
| Weight                      |                            |           | kg    | 39                             | 55          | 55         | 59         | 73          |
| Casing colour               |                            |           |       | ivory white                    |             |            |            |             |
| Sound pressure level        | cooling                    | H/L       | dB(A) | 47/43                          | 46/*        | 46/*       | 48/*       | 48/*        |
|                             | heating                    | H/L       | dB(A) | 48/44                          | 47/*        | 47/*       | 49/*       | 49/*        |
| Sound power level           | cooling                    | H         | dB(A) | 62                             | 59          | 59         | 61         | 61          |
|                             | heating                    | H         | dB(A) | *                              | 60          | 60         | 62         | 62          |
| Compressor                  |                            |           |       | hermetically sealed swing type |             |            |            |             |
| Refrigerant type            |                            |           |       | R-410A                         |             |            |            |             |
| Amount of additional charge |                            |           | kg/m  | 0.02 (20m or more)             | chargeless  |            |            |             |
| Maximum piping length       | for total of each room     |           | m     | 30                             | 45          | 45         | 60         | 70          |
|                             | for one room               |           | m     | 20                             | 25          |            |            |             |
| Maximum level difference    | between indoor and outdoor |           | m     | 15                             |             |            |            |             |
|                             | between indoor units       |           | m     | 7.5                            |             |            |            |             |
| Standard operation range    | cooling                    | from ~ to | °CDB  | +10~46                         | -10~46      |            |            |             |
|                             | heating                    | from ~ to | °CWB  | -10~15.5                       | -15~15.5    |            |            |             |