

Accessories: control systems

INDOOR UNITS		FTK/XS20DW/L	FTK/XS25DW/L	FTK/XS35DW/L	FTK/XS50DW/L
Wiring adapter for time clock/remote control (1)	normal open contact			KRP413A1S	
	normal open pulse contact			KRP413A1S	
Centralised control board	up to 5 rooms (2)			KRC72	
Central remote control				DCS302C51	
Unified ON/OFF control				DCS301B51	
Schedule timer				DST301B51	
Interface adapter (3)				KRP928A2S	

(1) Wiring adapter is supplied by Daikin. Timer and other devices: field supply.

(2) Wiring adapter is also required for each indoor unit.

(3) For DIII-NET adapter

Accessories

INDOOR UNITS	FTK/XS20DW/L	FTK/XS25DW/L	FTK/XS35DW/L	FTK/XS50DW/L
Titanium apatite photocatalytic air purification filter (without frame)			KAF970A46	
Anti-theft protection for remote control			KKF917AA4	

Accessories

OUTDOOR UNITS	RK/XS20D	RK/XS25D	RK/XS35D	RK/XS50E
Air direction adjustment grille		KPW937A4		KPW945A4

Note:

1) VM = 1 ~ 220~240/220-230V, 50Hz/60Hz / V1 = 1 ~, 220-240V, 50Hz

2) Nominal cooling capacities are based on: indoor temperature 27°CDB/19°CWB • outdoor temperature 35°CDB • refrigerant piping length 7.5m • level difference 0m.

3) Nominal heating capacities are based on: indoor temperature 20°CDB • outdoor temperature 7°CDB/6°CWB • refrigerant piping length 7.5m • level difference 0m.

4) Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.

5) Units should be selected on nominal capacity. Max. capacity is limited to peak periods.

6) The sound pressure level is measured via a microphone at a certain distance from the unit (for measuring conditions: please refer to the technical databooks).

7) The sound power is an absolute value indicating the "power" which a sound source generates.

Head Office

Daikin Airconditioning UK Limited

The Heights, Brooklands, Weybridge, Surrey KT13 0NY

Tel 0845 6419000 Fax 0845 6419109

www.daikin.co.uk



Daikin Europe N.V. is approved by LRQA for its Quality Management System in accordance with the ISO9001 standard. ISO9001 pertains to quality assurance regarding design, development, manufacturing as well as to services related to the product.



ISO14001 assures an effective environmental management system in order to help protect human health and the environment from the potential impact of our activities, products and services and to assist in maintaining and improving the quality of the environment.



Daikin units comply with the European regulations that guarantee the safety of the product.



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FCU); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units.

UKEPLE06-07 / 05.06 / Swim / La Movidia
Printed on elemental chlorine free paper / Printed by Portishead Press




Attachment 3

Daikin Airconditioning UK Ltd

Daikin air conditioners
for your home

Wall Mounted Unit **R-410A**

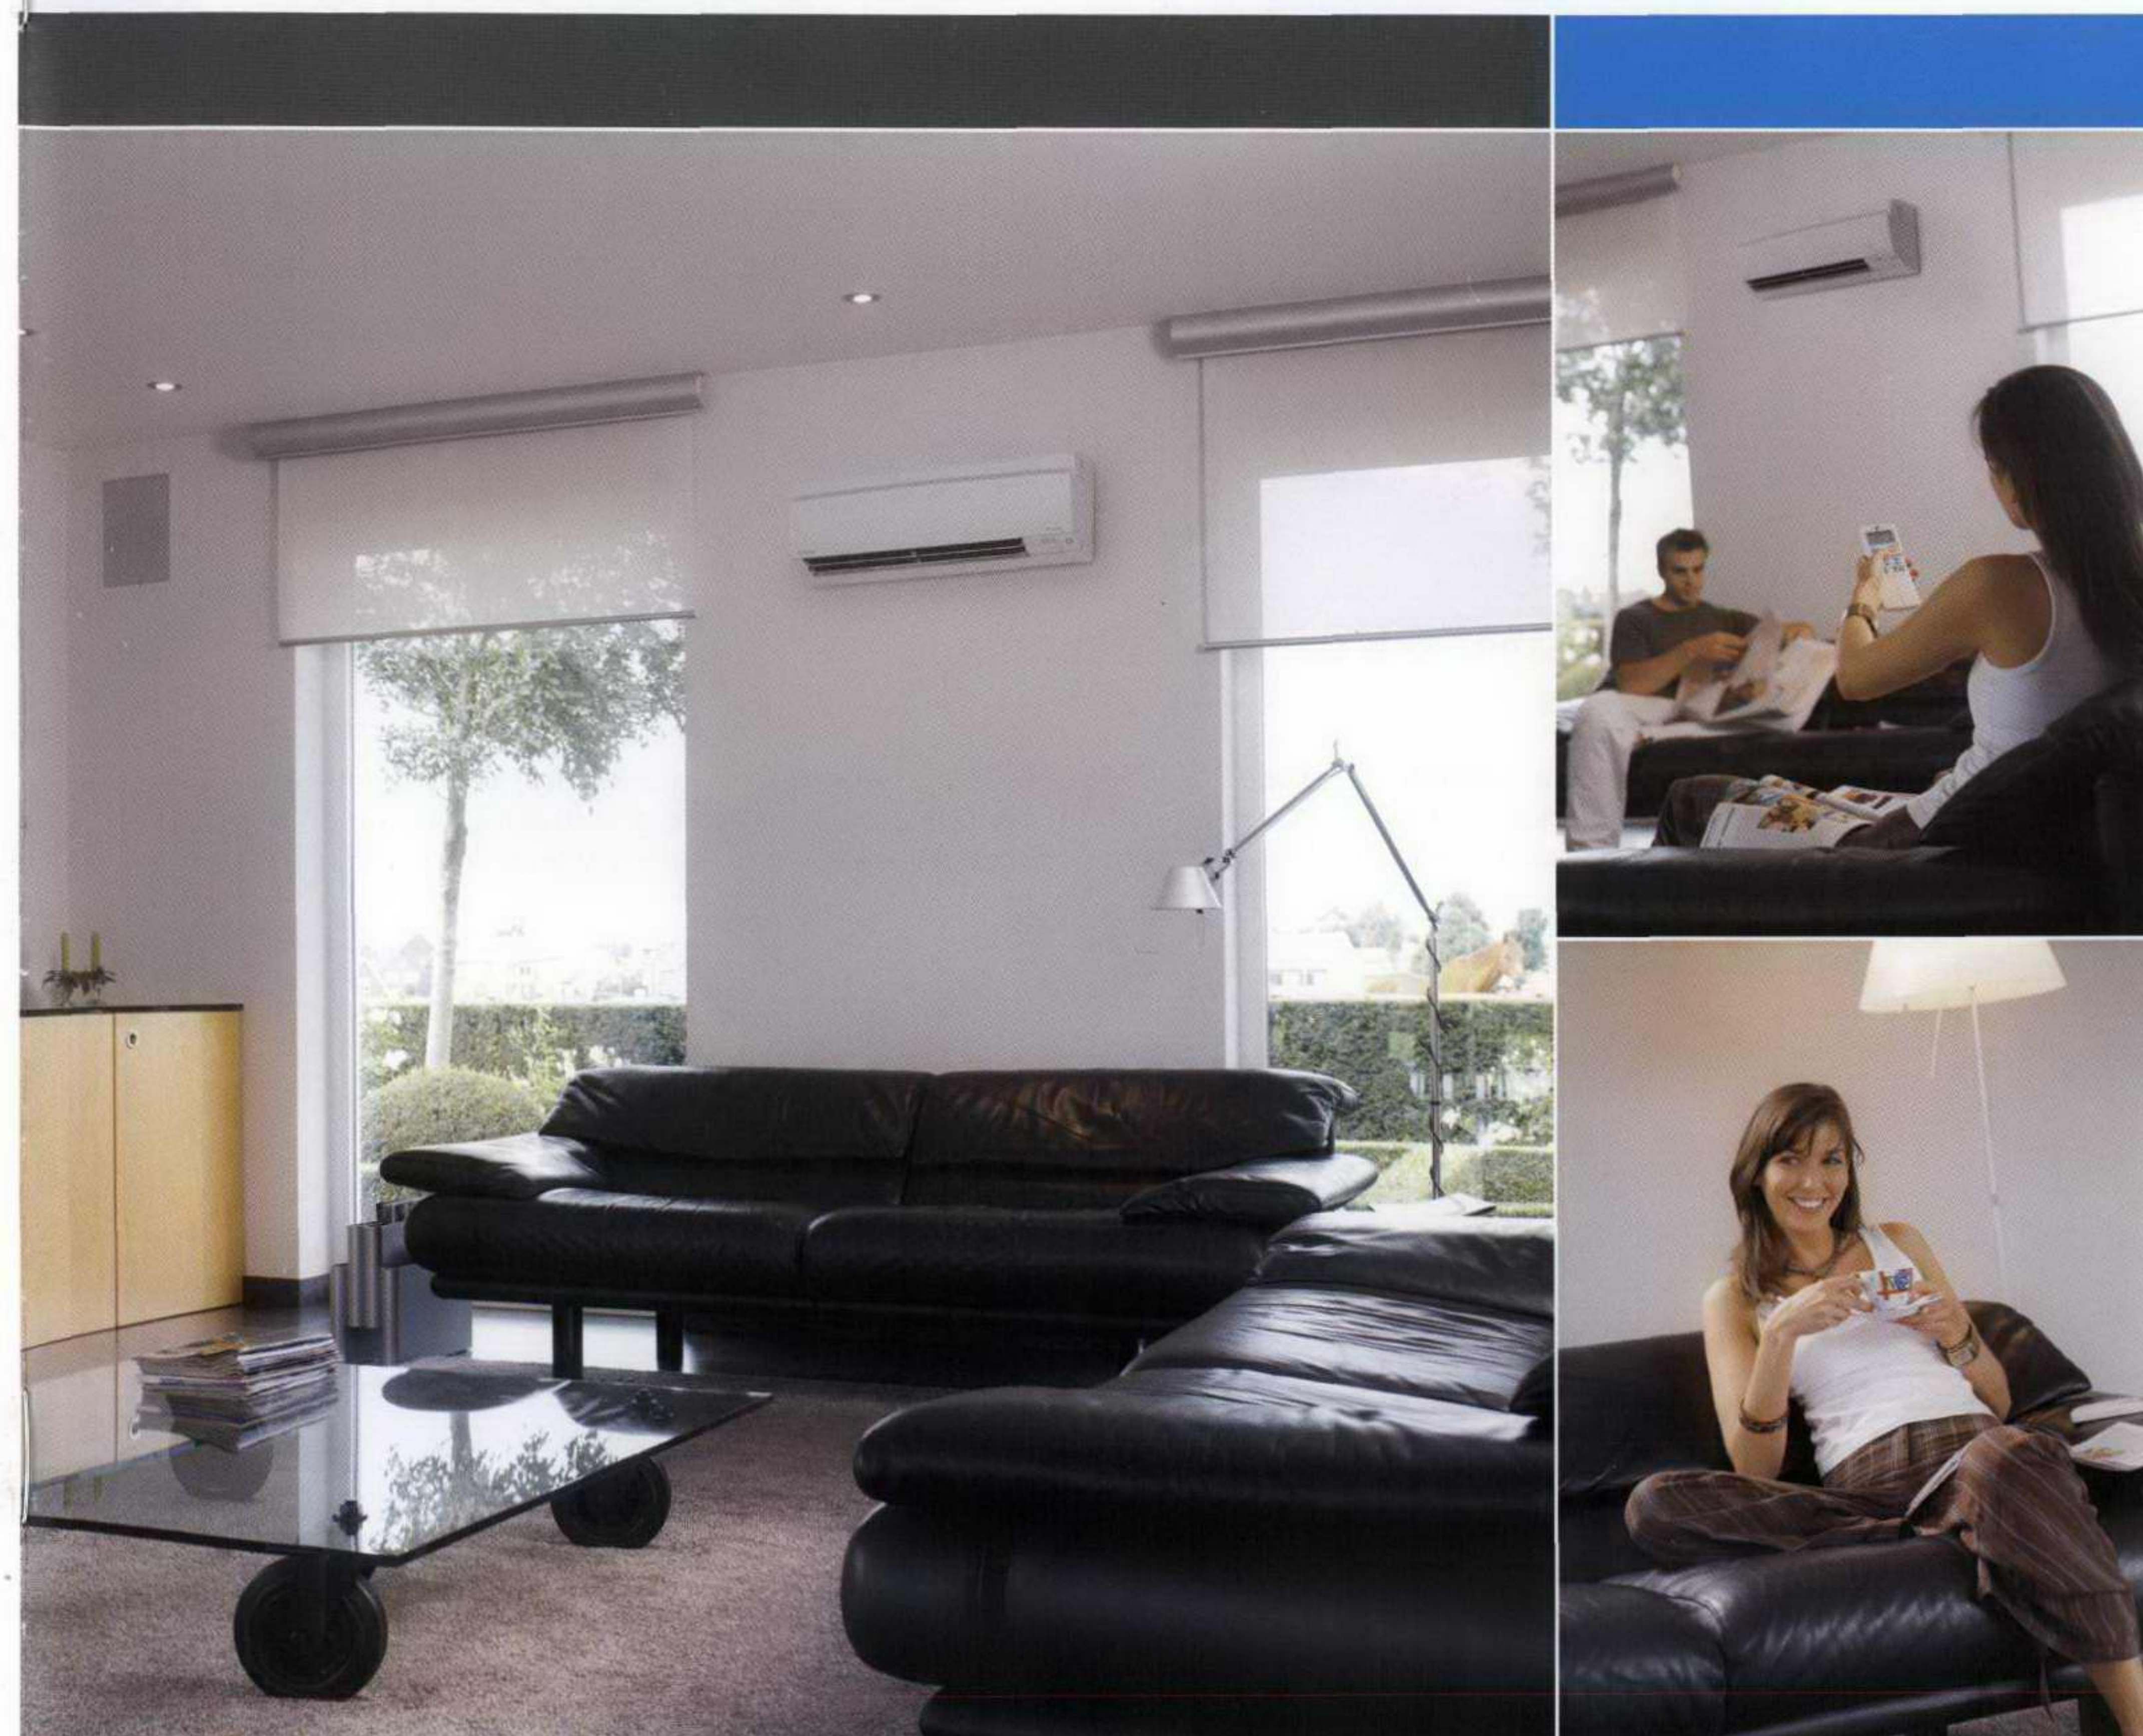

FTKS/FTXS-D