


Technical Specifications for the Europa Vertical Platform Lift

Location:	Internal or External
Travel:	Up to 13 Meters
Rated Load:	300kg
Rated Speed:	0.10 - 0.15 m/s
Platform Size:	1100mm wide x 1400mm long
Enclosure Size:	1350mm wide x 1550mm long
<i>Other platform sizes available max surface area 1.55 m/square</i>	
Floor Recess:	120mm (if applicable)
Enclosure height:	2400mm minimum (if required reducible to 2150mm.) For direct thrust min headroom is 2700mm
Platform Floor Material:	Slip resistant
Motor/ Transmission:	Two pole, single phase, 1,5 Kw located in the hydraulic power pack Double acting single stage hydraulic cylinder and twin cable
Power Requirement:	230V Single phase (50Hz)
Landing Controls:	Flush tactile call buttons at each landing
Platform Console:	Flush tactile floor designation buttons with emergency stop and alarm buttons mounted on the illuminated platform console Voice Synthesiser
Enclosure:	Self-closing hinged steel doors with large glass panel (Doors: 900mm wide x 2000mm high)
Safety Features:	Emergency manual release Electrically and mechanically interlocked doors Overload indicator and buzzer
Standard Finishes:	Red cabin (Light Grey, Light Green, White, Bordeaux or Blue-Aviation if required) Black doors, shafts and self supporting structures (Silver or any RAL colour if required)

Carries the European 'CE' Mark

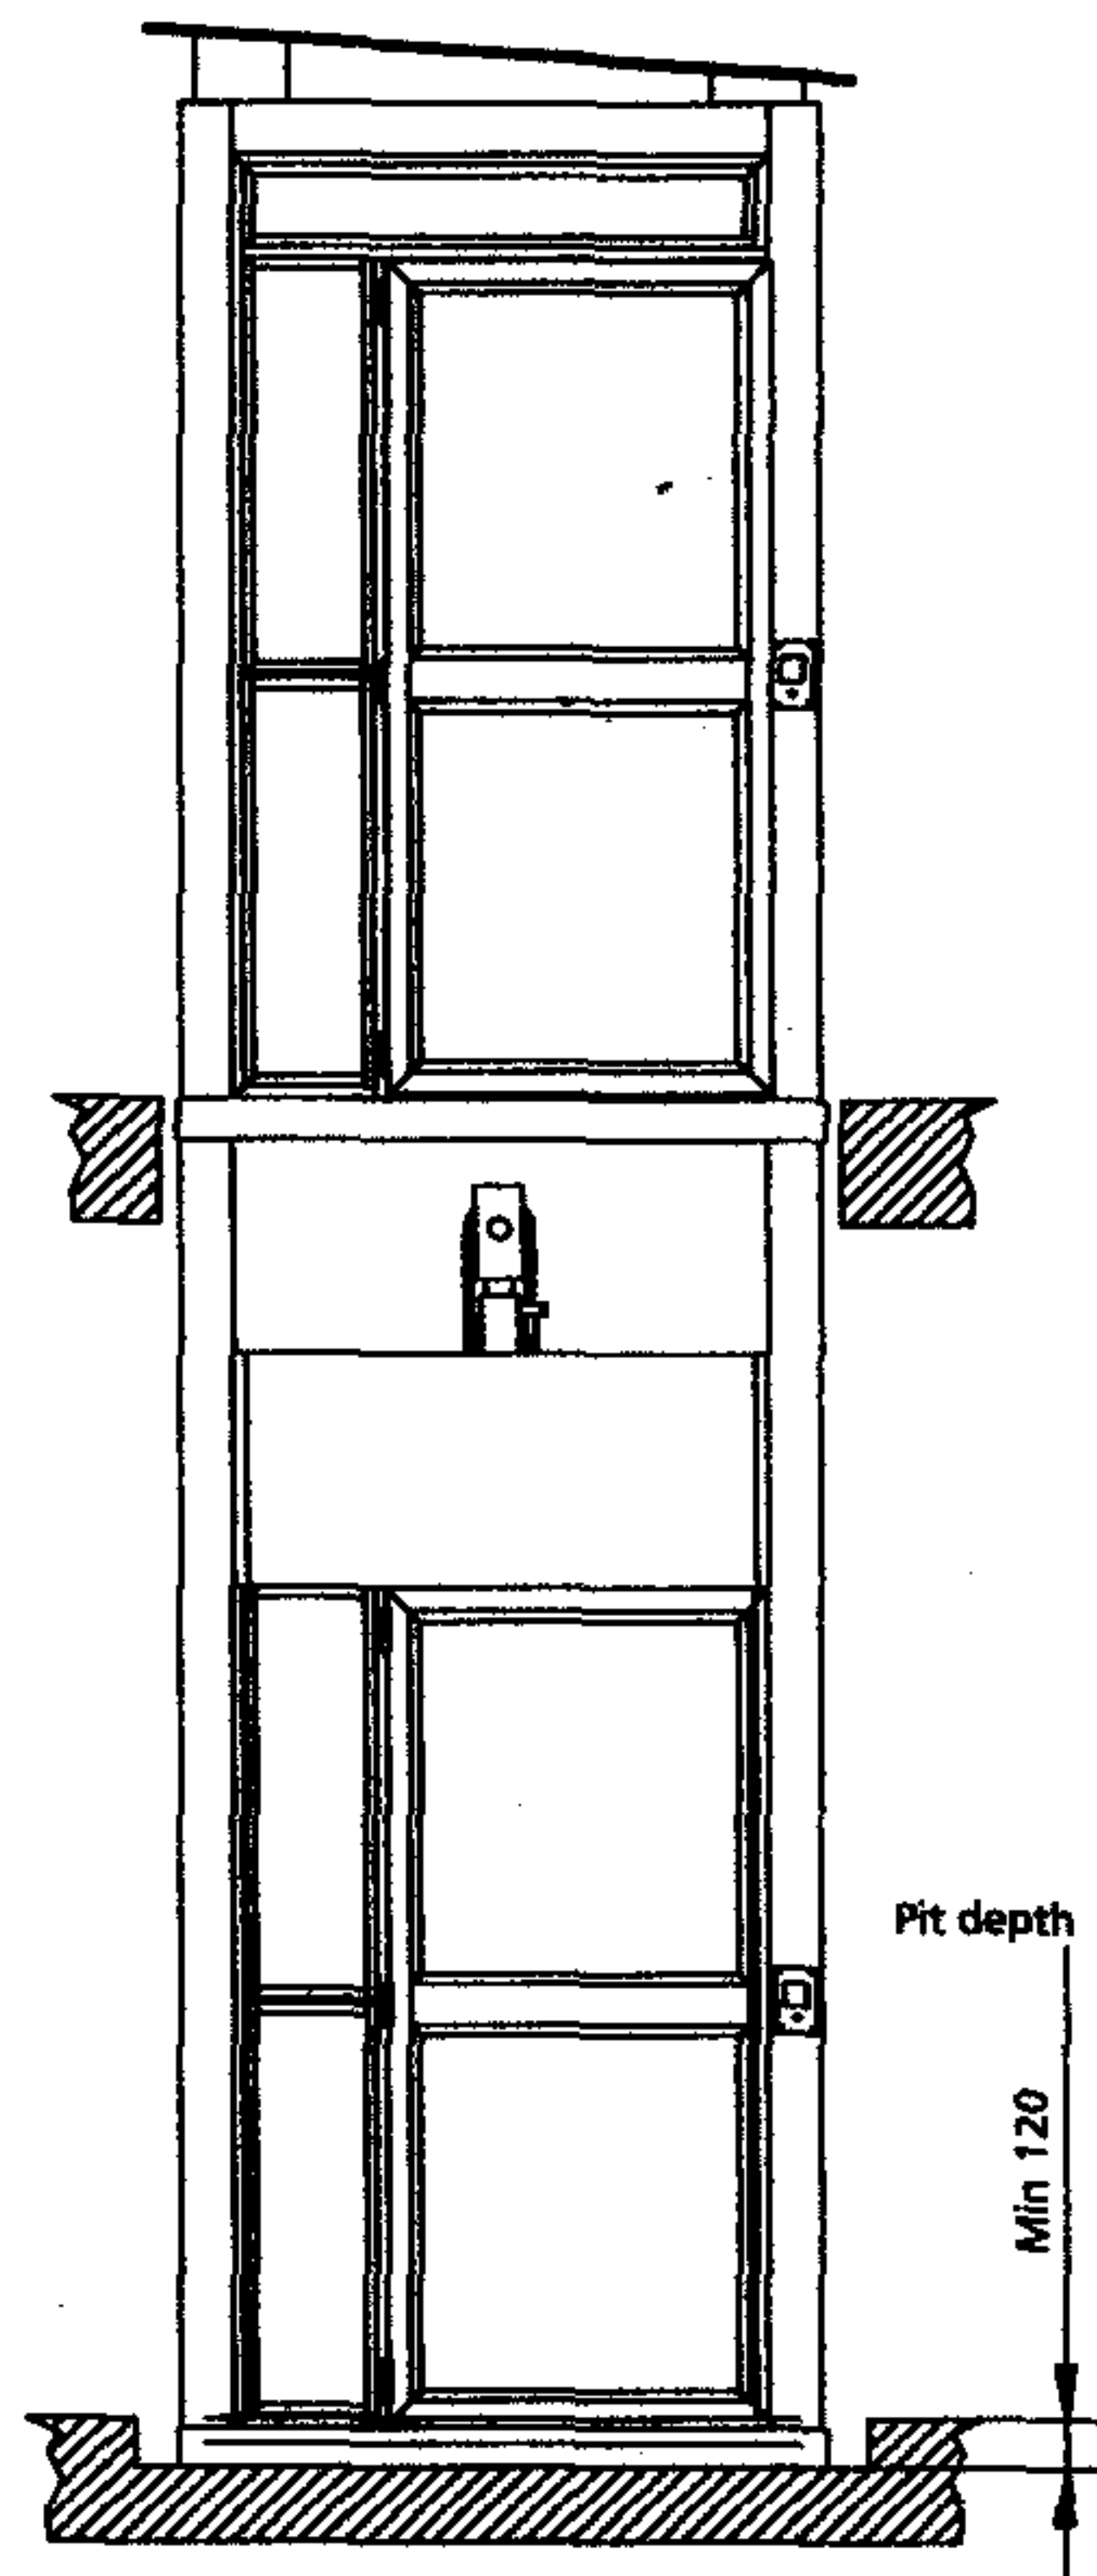

For Further Information, contact us at:

Platform Lift Solutions Ltd.
Unit 1F Ulswater Road, Longhill Industrial Estate,
Hartlepool, TS25 1UE

Tel: +44 (0)1429 426222
Fax: +44 (0)1429 426223
Visit: www.platformlifts.co.uk

All information in this leaflet is correct at the time of printing.
Platform Lift Ltd. has been notified to make
technical alterations to the lift to meet the requirements of the
ENVIRONMENT DEPT.

04 SEP 2007