



More up top.

Search


Go →

- Roofing
- Cladding & Building Boards
- Profiled Sheeting
- Technical Services
- News
- Case Studies
- Find a Stockist
- Brochure Request
- Sample Request
- Contact Us

Home > Roofing > Slates > Rivendale Fibre Cement Slate

- Clay Tiles
- Concrete Tiles
- Slates

Rivendale Fibre Cement Slate

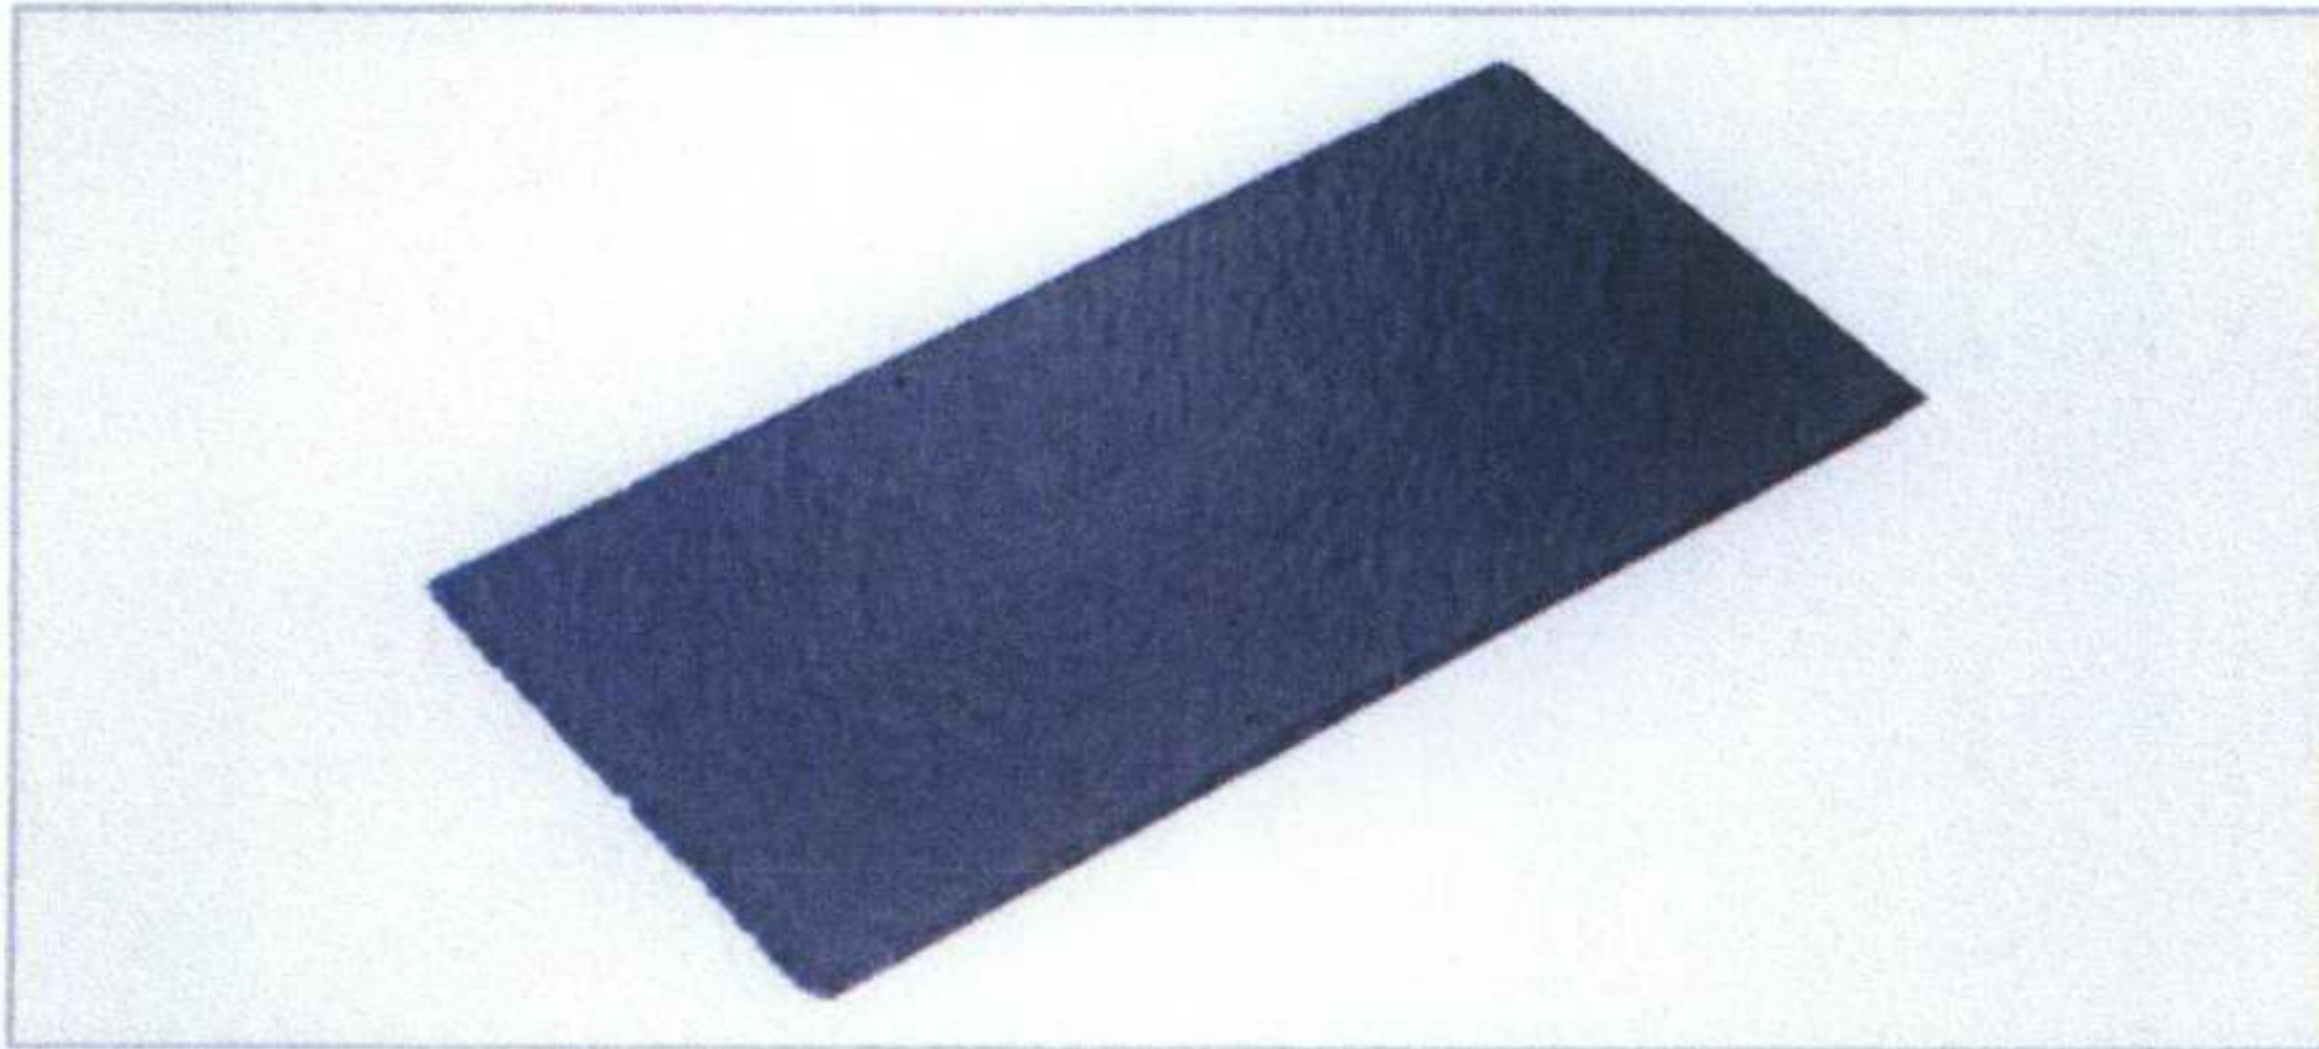

- Overview
- Technical Data
- Fittings
- Ventilation
- Dry Fix Systems
- Universal Accessories
- Next Steps
 - Request a Brochure
 - Request a Sample
 - Request a Health & Safety Data Sheet
 - Find a Stockist
 - Read Case Study
- Downloads
 - Brochure (PDF)
 - Fixing Guide (PDF)
 - CAD Data

Description

Rivendale slates offer the latest in outstanding aesthetics. The finely detailed textured surface and dressed edge closely resemble natural slate and will add the appeal of a natural slate look to any roof. This, combined with the lightweight, strength and durability of Rivendale slates, make them a perfect choice for all projects.

Colours

The slates will lighten after exposure to sunlight. Weathering will slowly affect the surface coating to expose the coloured base material. This lightening is similar to that experienced with natural slate. Please refer to BS 5534 Section 5.6 for further details.

Advantages

- British Board of Agrément certified
- randomly textured surface and dressed edges
- closely replicates the appearance of natural slate
- light weight
- durable
- pre-holed
- easy to handle and install
- comprehensive range of accessories

Colours



Blue/Black


Heather

Green

Similar products

- Birkdale
- Garsdale
- Thrutone

- About Us
- Accessibility
- Terms & Conditions
- Contact Us
- Site Map

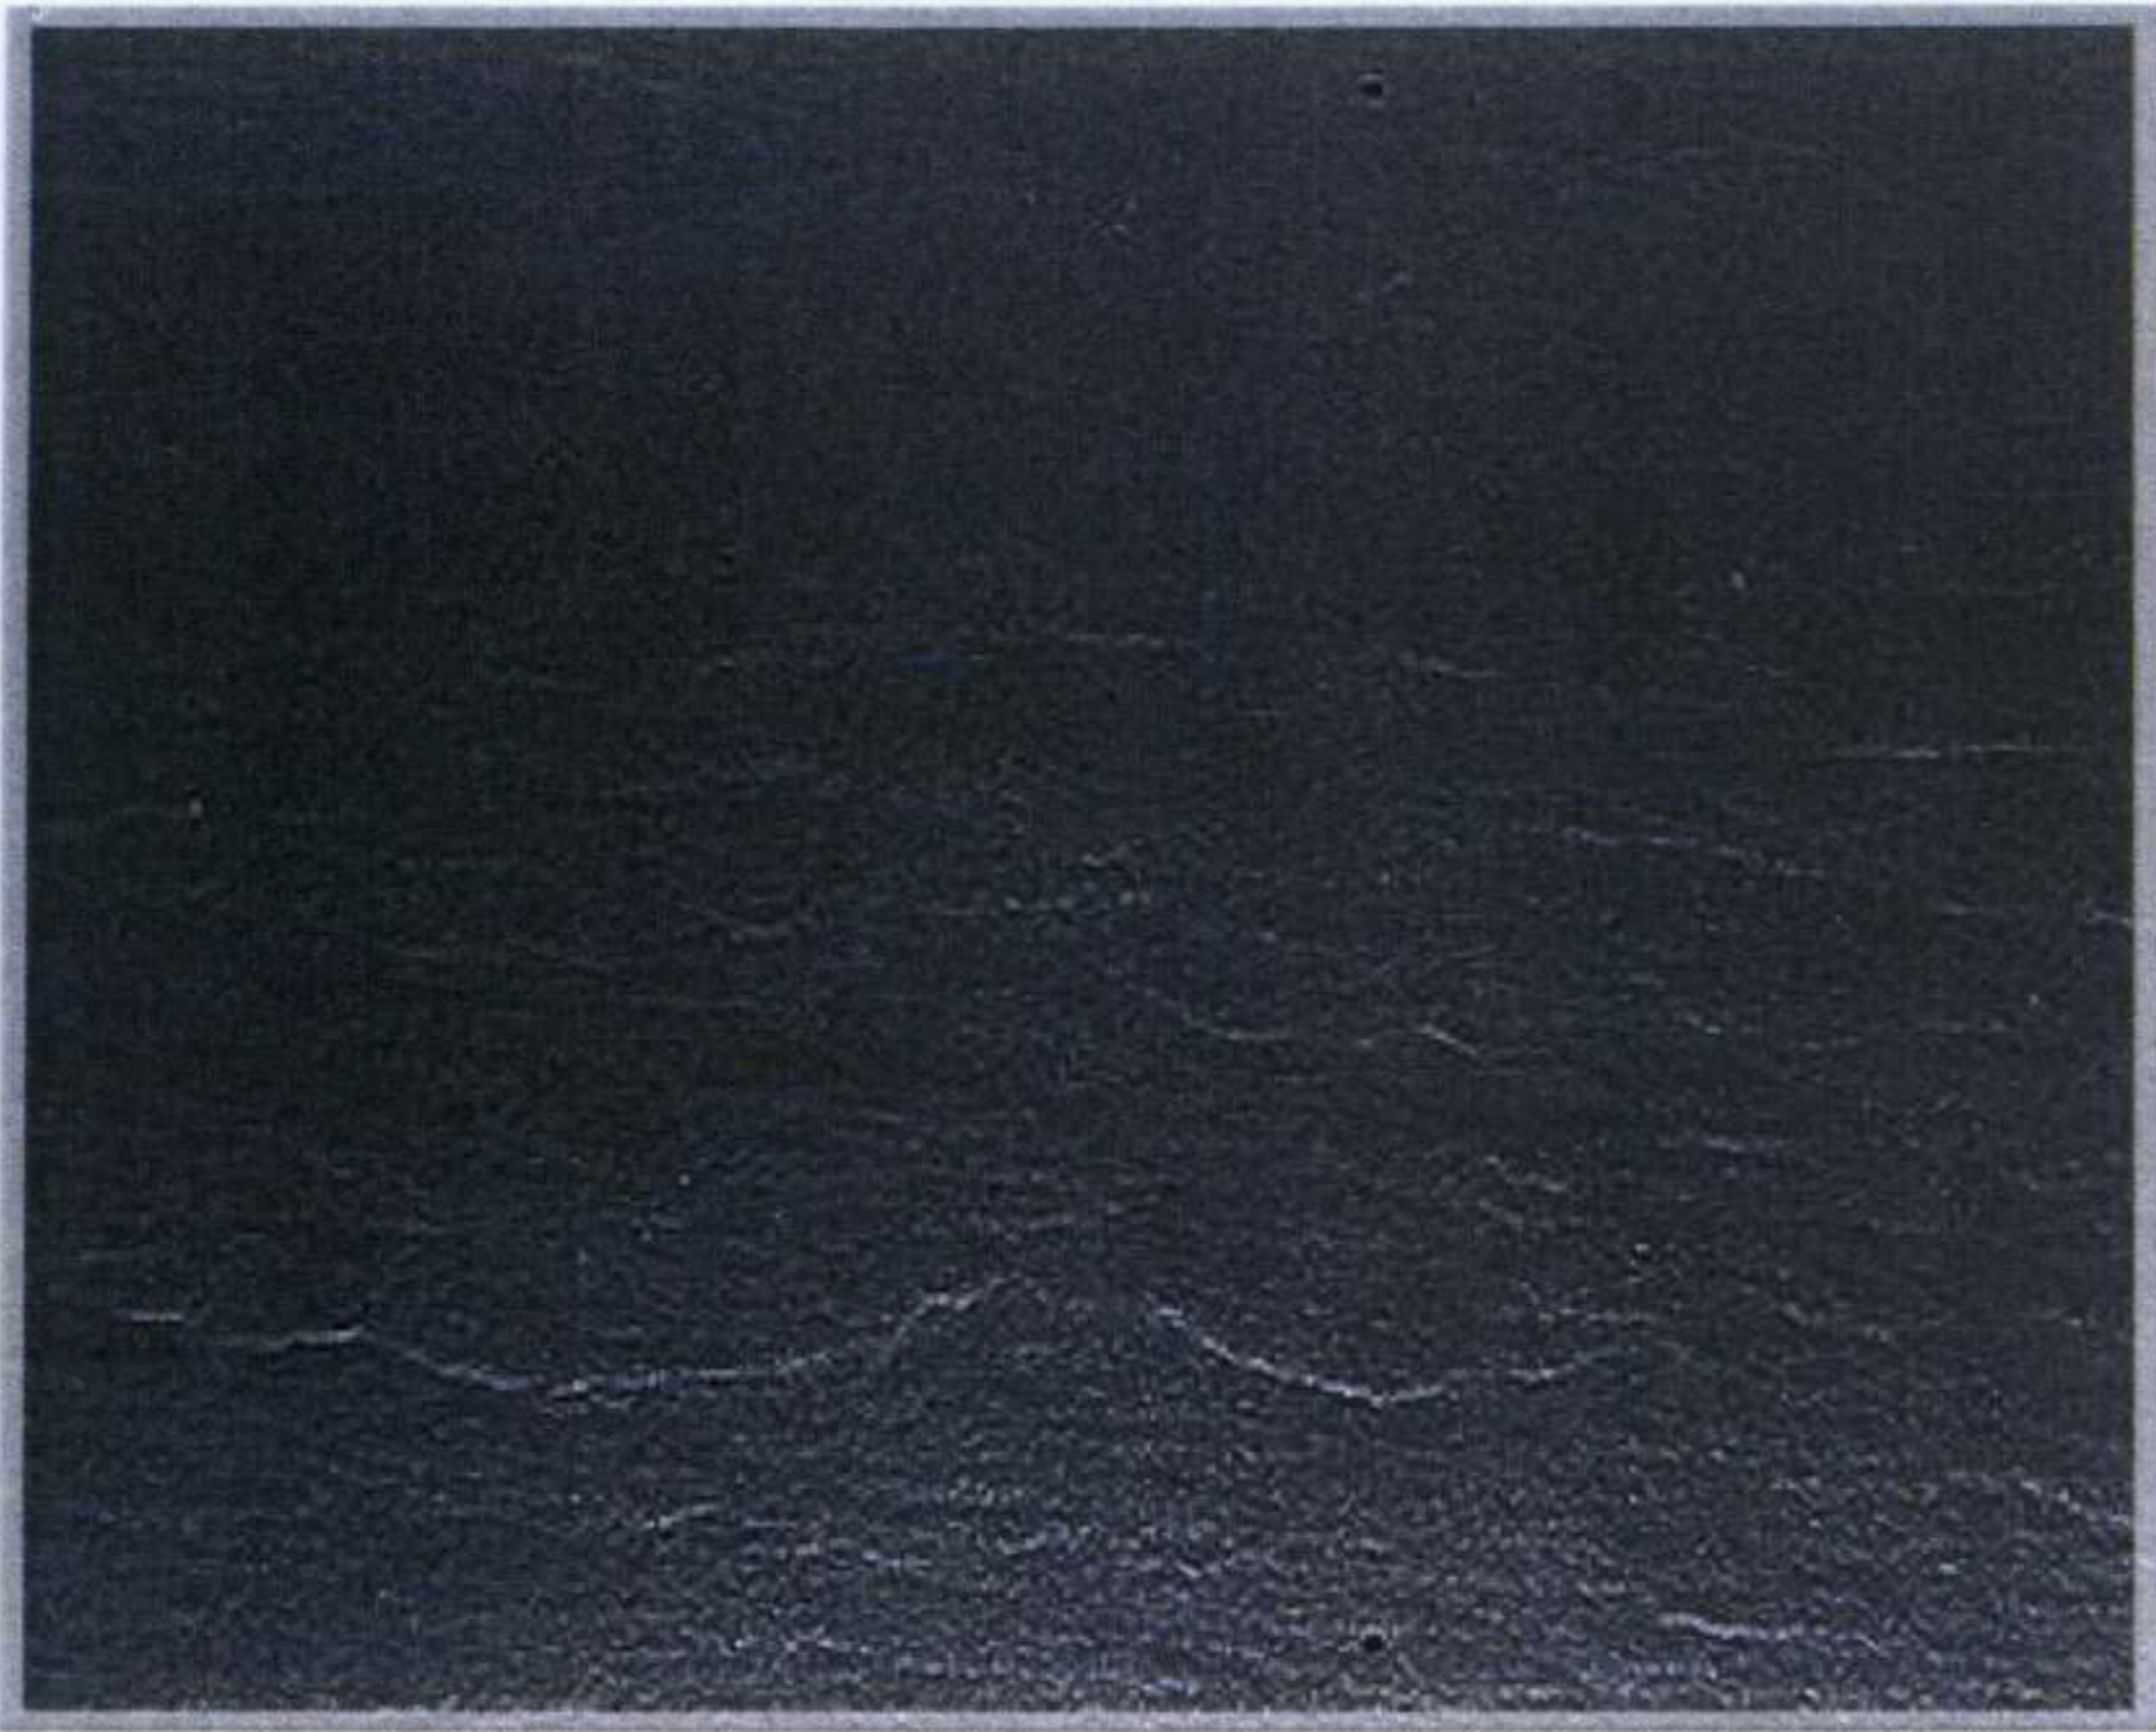

Rivendale

Decorative roof tiles



A finely detailed surface and dressed edges that together reproduce the attractive appearance of natural slate.

Rivendale edge profile & colour availability



→ Samples

web marleytiles.co.uk/samples
Tel 01283 722688

Technical data

Size of slate 600mm x 330mm

| | |
|----------------------------|-----------|
| Minimum pitch (100mm lap)* | |
| Moderate exposure | 22.5° |
| Severe exposure | 25° |
| Minimum pitch (110mm lap)* | |
| Moderate exposure | 20° |
| Severe exposure | 22.5° |
| Maximum pitch | 30° |
| Typical laps (mm) | 100, 110 |
| Maximum gauge | 245-250mm |

Covering capacity (incl. slates/m²)

| | |
|-----------|------|
| 100mm lap | 13.4 |
| 110mm lap | 13.6 |

Weight of slating (approx. kg/m²)

| | |
|-----------|--------------------------------|
| 100mm lap | 20.4 (0.20 kN/m ²) |
| 110mm lap | 20.9 (0.20 kN/m ²) |

Battens required (incl. battens/m²)

| | |
|-----------|------|
| 100mm lap | 4.60 |
| 110mm lap | 4.08 |

Batten size recommended (fixed to BS 5634):
38 x 25mm for rafters/supports not exceeding 450mm centres.
50 x 25mm for rafters/supports not exceeding 600mm centres.

Slate nails 30mm x 2.85mm
(Copper to BS 1202-2)

Copper disc rivets required

* The minimum recommended pitch and lap may be reduced by special order reference. Where the roof slope exceeds 60° or the length of the overhang exceeds 1.5m and if rafters or length of battens or supports are exposed, please refer to the Technical Advisory Service.

Gauges of exposure are given in BS 1694 Part 2.

