

HOW CAN WE HELP YOU?

ROOF AND FAÇADE
GUTTERS AND PIPES
DORMERS AND MORE
SOLAR

RHEINZINK®You are here: [Homepage](#) | [Products](#) | [Roof and Façade](#) | [Double Standing Seam](#)

Search

Ok >>

Products

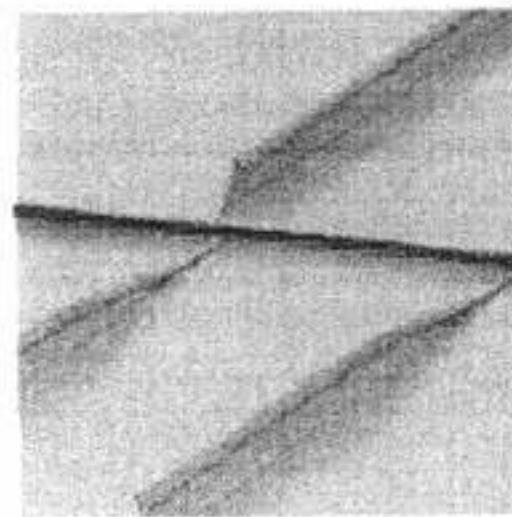
[Roof and Façade](#)[Gutters and pipes](#)[Dormers and more](#)[Solar](#)

Service

References

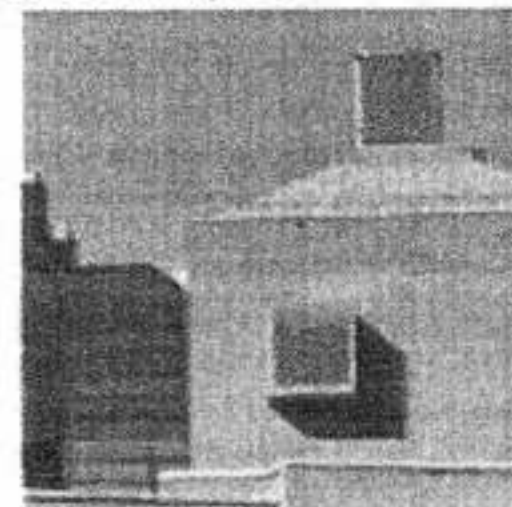
[RHEINZINK Titanzink](#)[Enterprise](#)[Contact](#)

RHEINZINK® worldwide

**RHEINZINK® - Double Standing Seam**[Product overview](#)[Download](#)[References](#)[Technology](#)[Construction](#)[Accessories](#)**RHEINZINK® - Double Standing Seam**

- Fine seam lines give a slim appearance
- Harmonises with both traditional and modern architecture
- Feasible with conical surfaces as well as concave and convex rounded surfaces
- Feasible at a roof pitch from as low as 3°
- Simple, efficient installation
- Rain proof long-seam connection
- Use of pre-shaped courses
- Courses can be in lengths of up to 16.0 m

choose your country >>

**RHEINZINK® - Double Standing Seam**

With respect to the material zinc, the dual standing seam counts as a development of the original wooden seam / simple standing seam. Since literature of 1899, it has been the clear preference over other systems, for roofs with a slope of under 25° (minimum slope 3° or 5%). The name "dual standing seam" is characteristic of one of the of the classic long connection types - courses installed alongside one another, outside of the water level. At a minimum seam height of 23 mm, the dual standing seam is rain proof without any additional treatment. The 25 mm high, dual standing seam produced with with pre-shaped courses has gained international acceptance. The profile is tilted and closed manually or by machine, using shaping machines. It is even possible to produce special shapes such as convex and concave curves or conical course without difficulty. The multitude of possible detail variations in the dual standing seam offers a subtle emphasis of shape and looks equally appropriate with both traditional architecture and modern designs.

Roof Products

[Double Standing Seam](#)[Angled Standing Seam](#)[Click Strip System](#)[Tile Systems](#)[The RHEINZINK QUICK STEP-Stepped Roof](#)

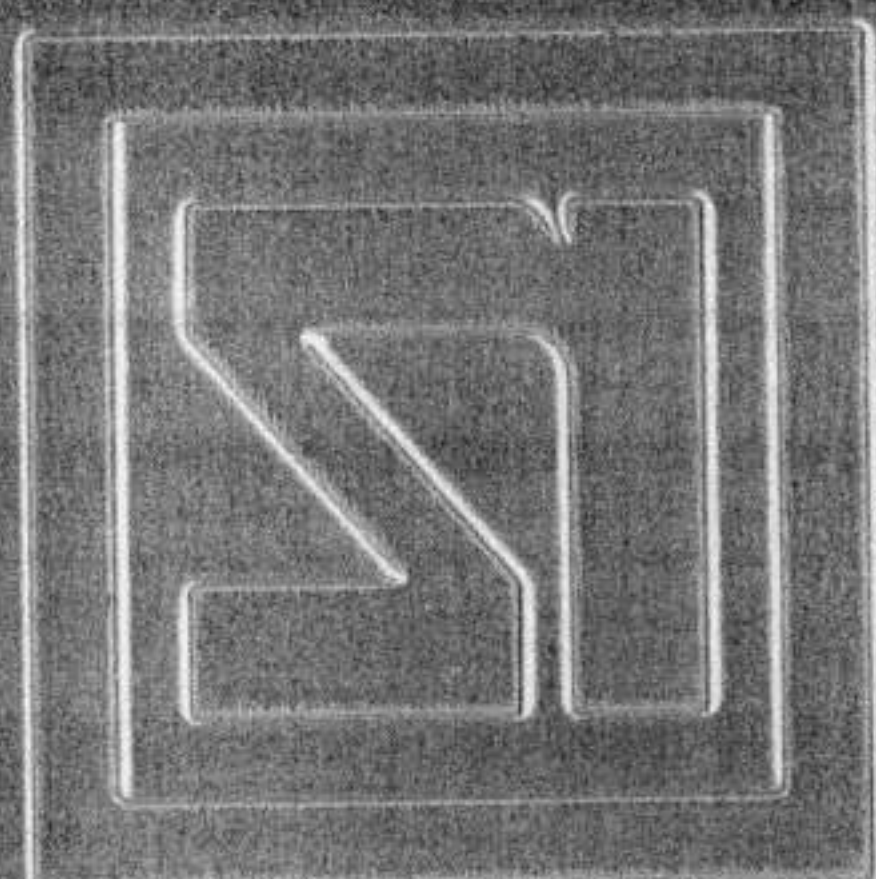
Façade Products

[Angled Standing Seam](#)[Click Strip System](#)[Tile Systems](#)[Reveal Panel](#)[Horizontal Panel](#)[Shiplap Panel](#)[Cassettes](#)[Corrugated Profile](#)[Trapezoidal Profile](#)[Imprint](#)[Print preview](#)[up](#)

RHEINZINK
PREWEATHERED
BLUE GREY

RHEINZINK
PREWEATHERED
GRAPHITE GREY

RHEINZINK
BRIGHT



RHEINZINK

www.rhein-zink.com


RHEINZINK® is the brand name for our zinc alloy made from fine zinc with a 99.995 % degree of purity, and precisely defined additions of copper and titanium. Developed for the construction industry, the material is characterised by its excellent processing qualities. RHEINZINK® is a long lasting material with a future because of its extremely long life span, maintenance free finish and elegant appearance. At RHEINZINK, we take great pride in our customer support, providing technical assistance to both architects and installers alike. RHEINZINK® is available in "bright", "preweathered pre blue grey" and "preweathered pre graphite grey" material.

Exceptional quality and compatibility with the environment are the reasons for the international recognition given to RHEINZINK® roof, façade and roof drainage systems. All RHEINZINK® products are manufactured using state of the art production systems and comply with very strict quality and environmental criteria. RHEINZINK® conforms to the highest standards, as is demonstrated by the QUALITY ZINC logo awarded by the TÜV Rheinland Group (test no. 424-030012) and certification in accordance with DIN EN ISO 9001:2000. In addition, RHEINZINK® has been declared to be a building material which is compatible with the environment (AUB-RHE-11105-D) by the independent committee of the AUB after an extensive evaluation of the product's entire lifecycle.



© 2007 RHEINZINK U.K.

RHEINZINK® – The material will



RHEINZINK

RHEINZINK U.K., Cedar House, Cedar Lane, Frimley, Camberley, Surrey GU16 7HZ
 Tel.: +44 (0) 12 76 - 68 67 25, Fax: +44 (0) 12 76 - 6 44 80
 E-Mail: info@rheinznk.co.uk, www.rheinznk.co.uk

