



CENTRE-PIVOT ROOF WINDOW

The GGL's central pivot makes for extremely smooth and easy operation. Even the largest VELUX roof window responds readily to gentle pressure applied through the control bar yet the window holds firmly in the open position. To clean the window, rotate it through 180° and secure with its built-in barrel bolt.

As with all VELUX roof windows, the GGL is quick and easy to install, remarkably tough and durable and finished with a clear lacquer (known as TOPfinish) to enhance the pine's aesthetic appeal.

GGL IMPROVEMENTS FOR 2006

VELUX has replaced their Standard GGL roof window with the much improved GGL THERMO-STAR with market leading energy efficiency plus improved sound insulation and air tightness.

Additionally the new GGL 5-STAR incorporates a special clear and clean coating on the outer pane to reduce the need for cleaning whilst keeping the pane clearer for longer.

Also new for 2006 is the VELUX GGL INTEGRA® electric roof window. To find out more – turn to page 16.



VENTILATION EVEN WITH THE WINDOW CLOSED

One short pull of the control bar opens the ventilation flap, while a longer, gentle pull opens the window itself. If additional ventilation is required, the window can be opened further and secured with a barrel bolt.

VELUX®

BLINDS

See VELUX blinds brochure.


GLAZING OPTIONS

For details see page 23.

GGL INTEGRA ELECTRIC WINDOWS

See page 16.

GGL INSTALLATION PITCH

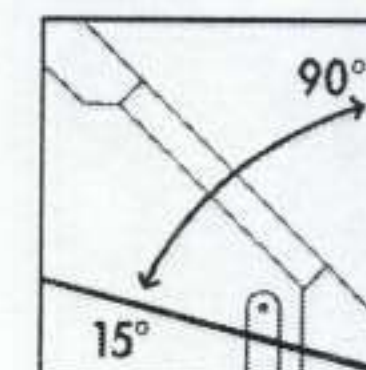

GGL CENTRE-PIVOT ROOF WINDOWS

External frame size (nominal w x h) cm



55 x 78



55 x 98



66 x 118



78 x 98



78 x 118



78 x 140



94 x 160



114 x 118



134 x 98

STANDARD VARIANTS

C02

C04

F06

M04

M06

M08

P10

S06

U04

GGL 3059 Centre-pivot, TOPfinish pine, THERMO-STAR glazing (U=1.4 W/m²K*)

£ 137.48

148.05

183.30

169.20

195.05

211.50

256.15

235.00

235.00

GGL 3073 Centre-pivot, TOPfinish pine, PROTEC-STAR glazing (U=1.5 W/m²K*)

£ 185.13

204.28

244.34

233.00

259.42

286.31

349.83

319.70

330.75

GGL 3060 Centre-pivot, TOPfinish pine, 5-STAR glazing (U=1.4 W/m²K*)

£ 232.70

249.49

296.29

286.95

313.85

342.01

429.83

390.56

508.76

KMX 100 Conversion kit – for electrical operation of pre-fitted GGL windows £301.75

PRICE LIST 01.05.2006 **PRICES INCLUDE VAT**

*U-value relates to complete window

GGL
CENTRE
PIVOT



Exteriors Weather Protection

PRECISION-MADE FLASHINGS

WEATHERTIGHT FLASHINGS ARE OF VITAL IMPORTANCE TO ANY ROOF WINDOW INSTALLATION

A key factor in the success of VELUX roof windows is the way they appear to seamlessly integrate into the roof covering. Unobtrusive flashings overlap with the roof covering to provide vital water-proofing details around the window.

SUITABLE FOR MOST ROOFING MATERIALS

VELUX flashings are compatible with virtually any type of roofing material, from standard covers such as slate and tile through to corrugated

sheeting or even thatch. Whether you are planning a single roof window or a multiple combination, VELUX prefabricated flashings offer a complete solution for easy installation.


SAFE, EFFECTIVE RAINWATER DRAINAGE

The unique construction of VELUX flashings ensures safe drainage of rainwater coming from the roof above the window. Because the roofing material covers both top and sides, VELUX flashings are largely unobtrusive. To harmonise even further with the roofing material,

VELUX flashings are available in standard grey aluminium, or a colour/finish of your choice, to match the roof windows.

UNIQUE FLASHING SYSTEM

- Design compliments recessed roof window system.
- Harmonious grey colouring.
- Visual integration with cladding and roof window.
- Parts individually numbered for ease of recognition.
- Clipping system for easier, faster installation.

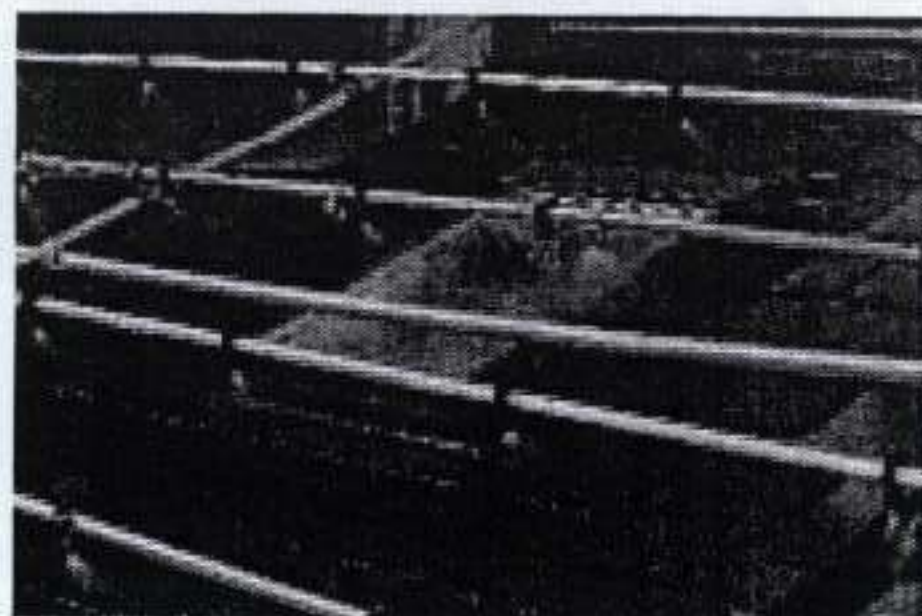


VELUX undertake extensive testing to ensure that all products perform to the very highest standards. Flashings are put through some of the world's most severe rain and wind tests.




NEW BDX Insulation Collar

BDX insulation collar provides the perfect interface between roof window and roofing structure to meet Robust Detail requirement for energy conservation. Includes BFX Underfelt Collar.

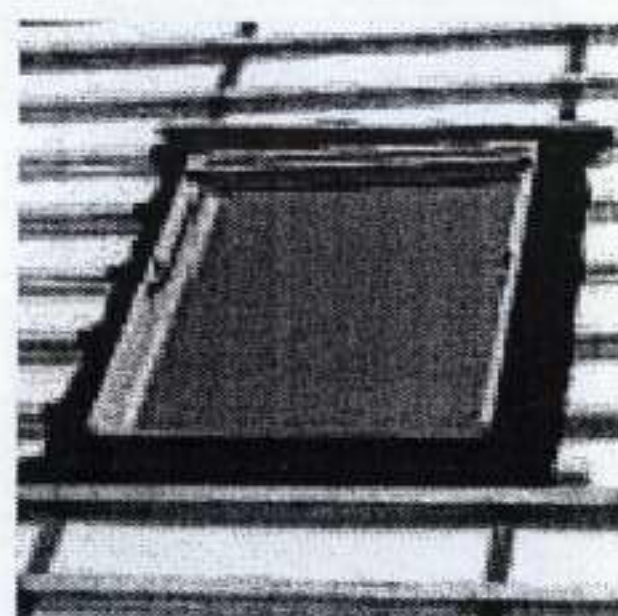

BFX Underfelt Collar

BFX underfelt collar (with transverse drainage gutter) provides a fast connection between window and roofing felt/membrane.

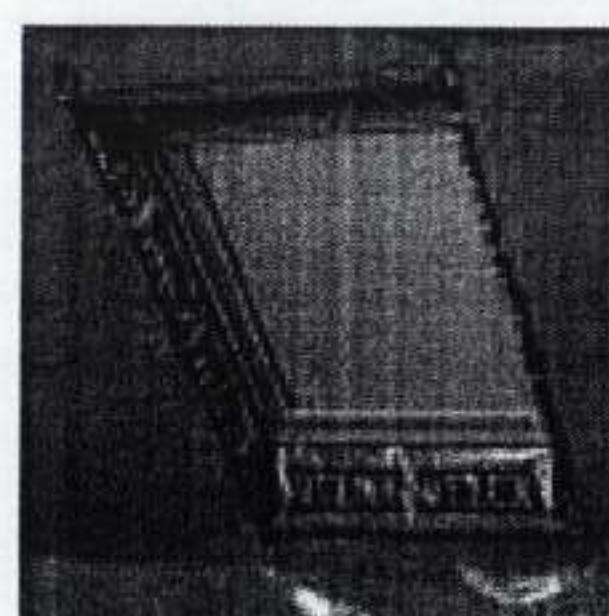

BBX Vapour Barrier

The BBX vapour barrier provides a secure connection between the window and the vapour barrier within the roof structure.

