

**ALL SOUL'S CHURCH,
152 LOUDOUN ROAD,
NW8 ODH**

**DETAILS FOR PLANNING AND LISTED
BUILDING APPLICATIONS**

Dated 28th March 2007

“Velux” Conservation styled rooflight ref: GGLSD5N1 finished black (two pages)

**“Duplus” flat roof deadlight ref: 8.3DL/AS size 1500 x 1500mm on plan and 200mm
high finished grey (two pages)**

“Timloc” low profile universal slate ventilator finished anthracite (two pages)

RECEIVED
28 MAR 2007

Specialist Requirements


CONSERVATION ROOF WINDOW SYSTEM

The VELUX Conservation Roof Window System offers all the superior technical features of a VELUX roof window but in a traditional conservation style.


The system blends in perfectly in sensitive conservation areas with its central glazing bar, recessed flashing and external black metal work.

CONSERVATION ROOF WINDOWS

Available as both centre-pivot and top-hung (emergency escape/access) versions. Both feature an internal frame and sash of TOPfinish Nordic pine and are supplied complete with mullion and suitable flashings to achieve a harmonious visual appeal with most roofing materials.

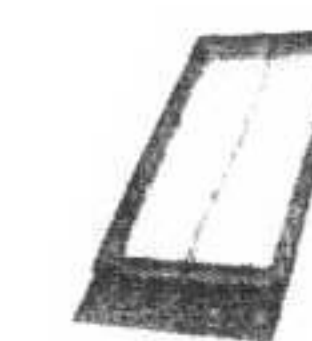

CONSERVATION
ROOF WINDOW

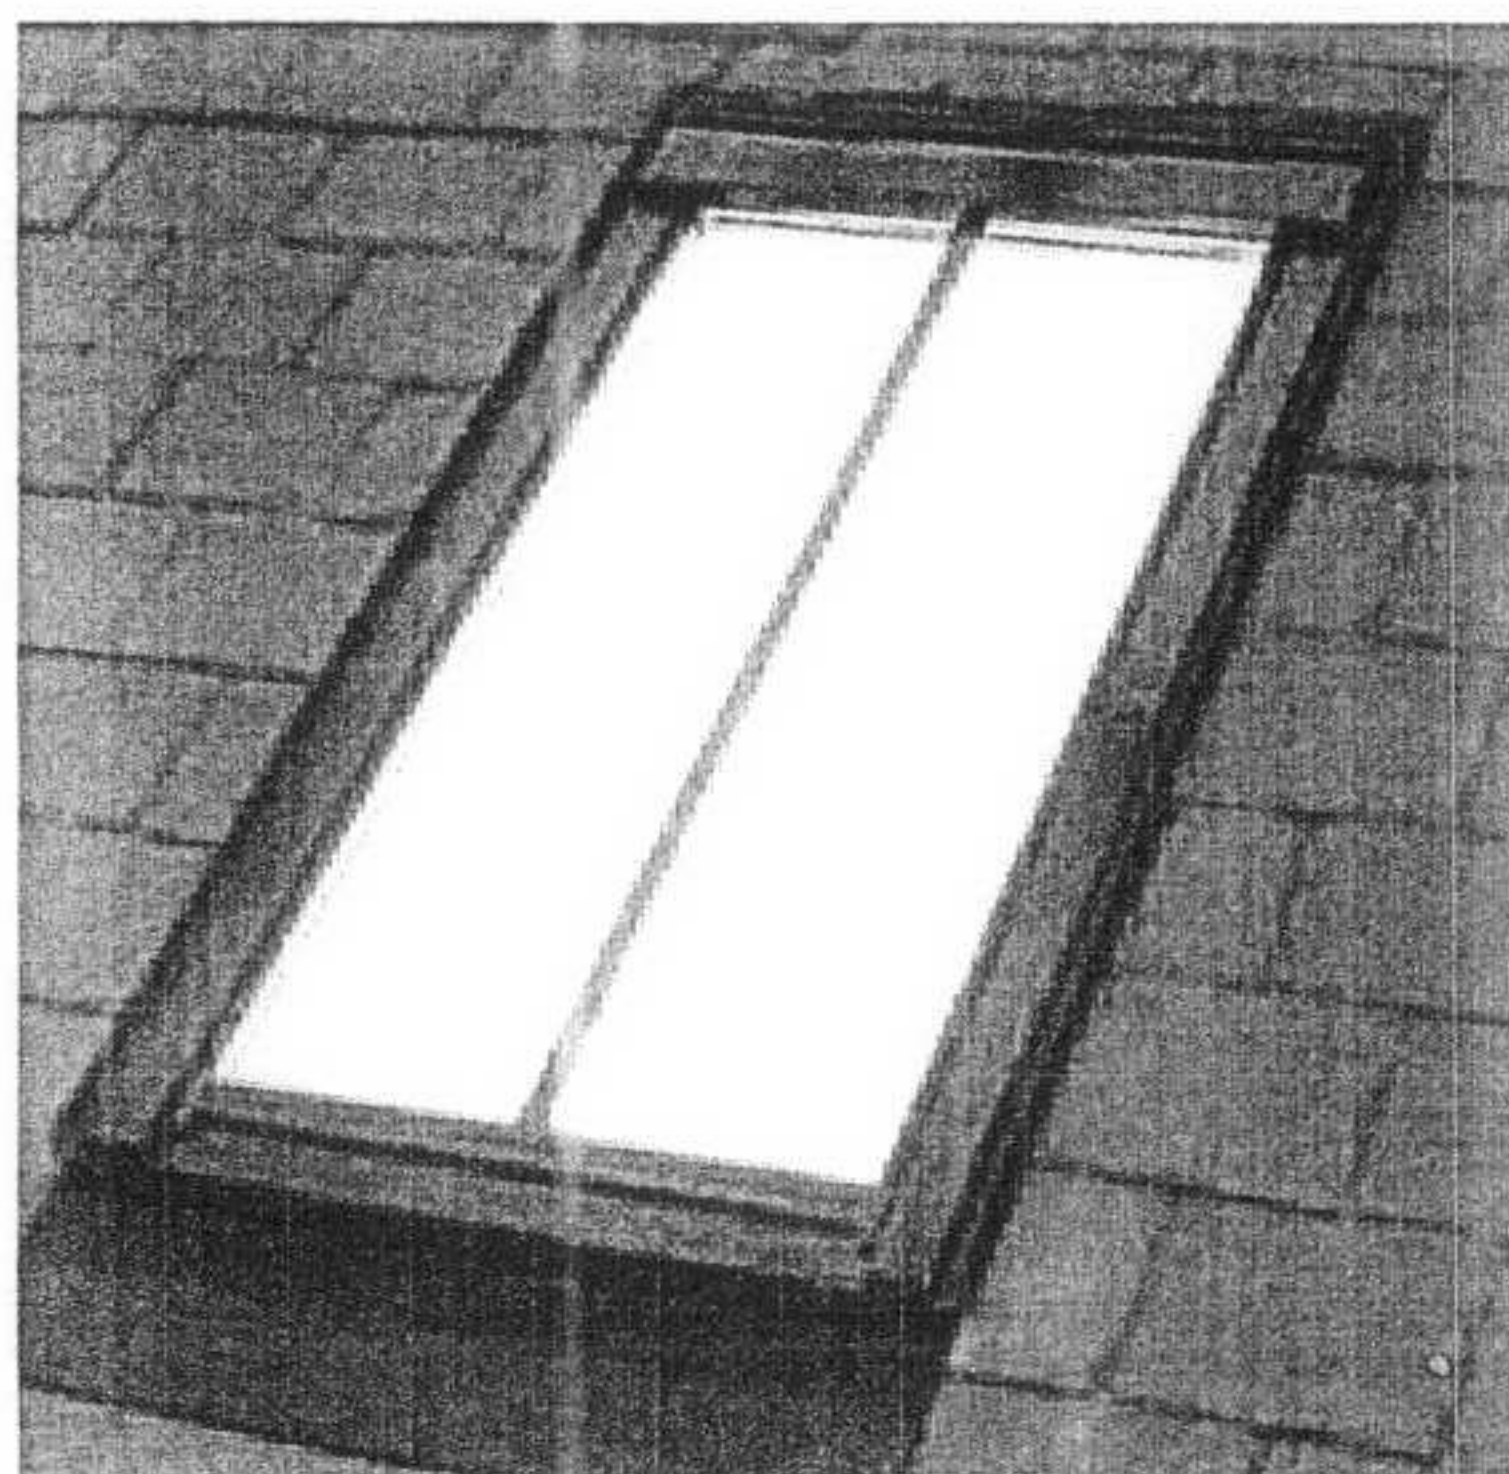

CONSERVATION ROOF WINDOW SYSTEM

Windows supplied complete with mullion and flashings.

External frame size (nominal w x h) cm

STANDARD VARIANTS


			
	55 x 98	66 x 118	78 x 140
	C04	F06	M08
GGL SD5N1 Centre-pivot, TOPfinish, PROTEC-STAR* glazing. Flashing for slate up to 8mm thick. Minimum 35° roof pitch.	408.82	462.65	583.74
GGL SD5P1 Centre-pivot, TOPfinish, PROTEC-STAR* glazing. Flashing for plain tiles up to 15mm thick. Minimum 25° roof pitch.	408.82	462.65	583.74
GGL SD5W1 Centre-pivot, TOPfinish, PROTEC-STAR* glazing. Flashing for tiles up to 120mm in profile. Minimum 15° roof pitch.	408.82	462.65	583.74
GPL SD5N1 Top-hung, TOPfinish, PROTEC-STAR* glazing. Flashing for slate up to 8mm thick. Minimum 35° roof pitch.			718.29
GPL SD5P1 Top-hung, TOPfinish, PROTEC-STAR* glazing. Flashing for plain tiles up to 15mm thick. Minimum 25° roof pitch.			718.29
GPL SD5W1 Top-hung, TOPfinish, PROTEC-STAR* glazing. Flashing for tiles up to 120mm in profile. Minimum 15° roof pitch.			718.29

PRICE LIST 01.01.2005 **PRICES INCLUDE VAT**


*U=1.6 W/m²K for complete window.

†Special springs to be specified at the time of ordering.

GGL INSTALLATION PITCH

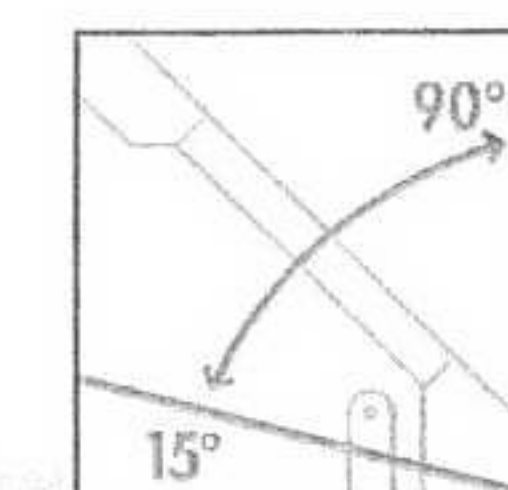

GPL INSTALLATION PITCH (75°) with the use of special springs†

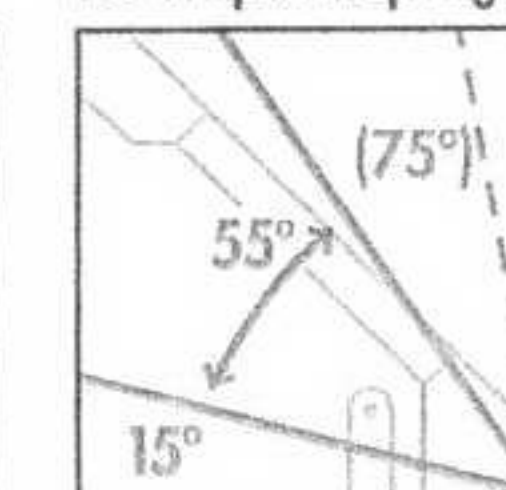

Installation pitch is dependent on Flashing Type. See adjacent table.



CONSERVATION ROOF WINDOWS

The VELUX Conservation Roof Window System offers all the superior technical features of a VELUX roof window but in a traditional conservation style.

The system blends in perfectly in sensitive conservation areas with its central glazing bar, recessed flashing and external black metal work.

WINDOWS SIT LOW IN THE ROOFLINE
Recessed installation principle for slated roofs.

TOP CONTROL BAR

Not only controls the background ventilation flap but operates the centre-pivot function for cleaning the outer pane (excludes GVA and GVT).

BLACK MULLION AND EXTERNAL METALWORK

*To reflect traditional conservation aesthetics.
Interior: TOPfinish pine sash and frame*

GLAZING

*PROTEC-START™ glazing as standard.
All panes are AA Fire Rated (excludes GVA and GVT).*

GLAZING DETAILS
PAGE 15

CHOICE OF TOP-HUNG OR CENTRE-PIVOT

Top-hung unit for use as emergency escape/access (Conservation Roof Window System only). Check with your local Building Control Department with regards to the position of the window.*

Details on this page refer to Conservation Roof Windows only.

Sanjay

Deadlights


Supplied to suit any width from 600mm.

Types DL/A, DL/HM, DL/P maximum width: 2000mm.

Types DL/AS, DL/ASHM, DL/ASP maximum width: 2400mm.


Type DL/AS

Suitable for roof openings up to 2400mm wide.

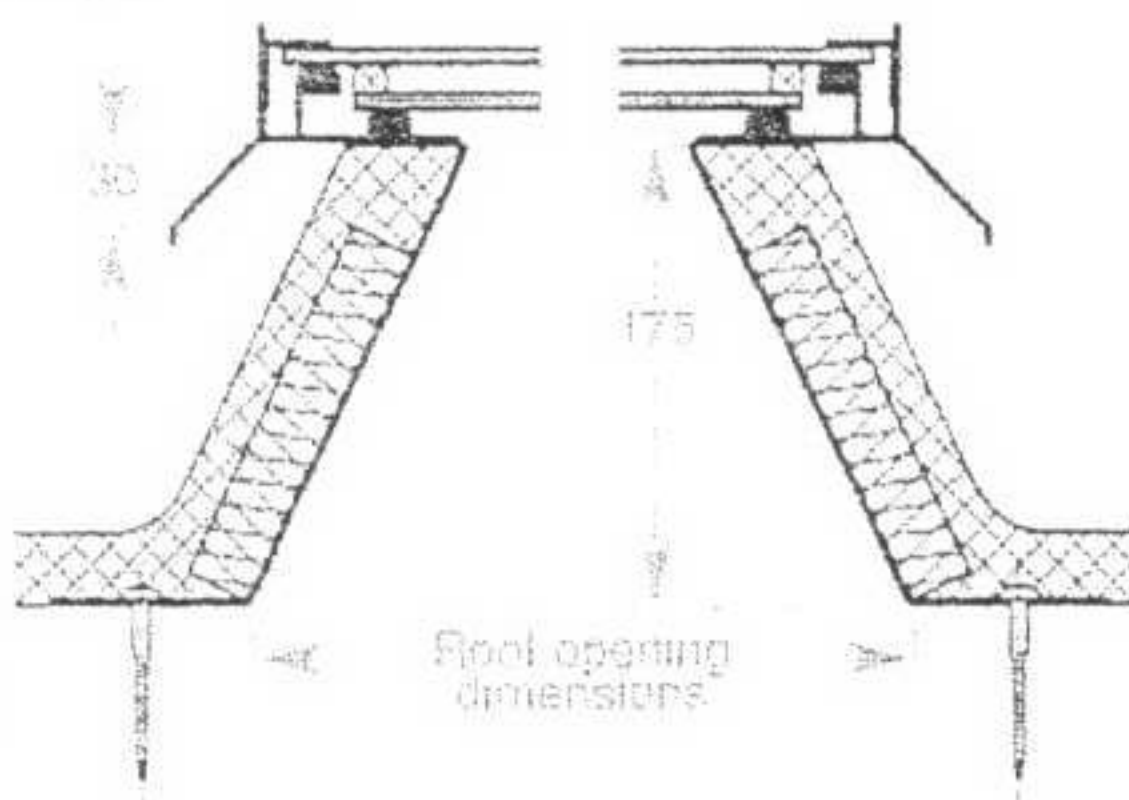

Type DL/W

Suitable for upstands up to 50mm wide.

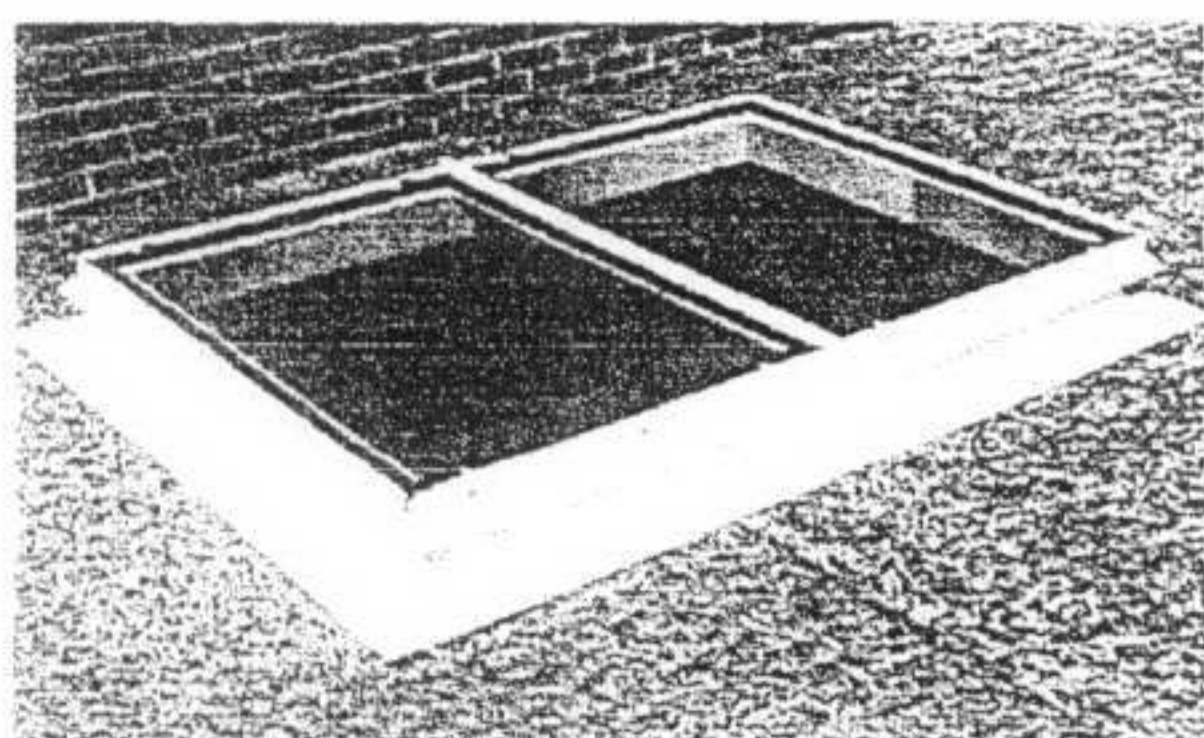

Continuous Deadlights



Glazing sections normally 600mm to 900mm wide and linked with 120mm wide intermediate glazing bar.

Hit and Miss, Controllable Ventilation Deadlights

Type DL/ASHM

DISCONTINUED

Controllable ventilation units on builders' curbs and on metal curbs. Vented on 2 sides. Pole operated. Available without base curb for fitting direct to existing upstand (Type DL/HM).

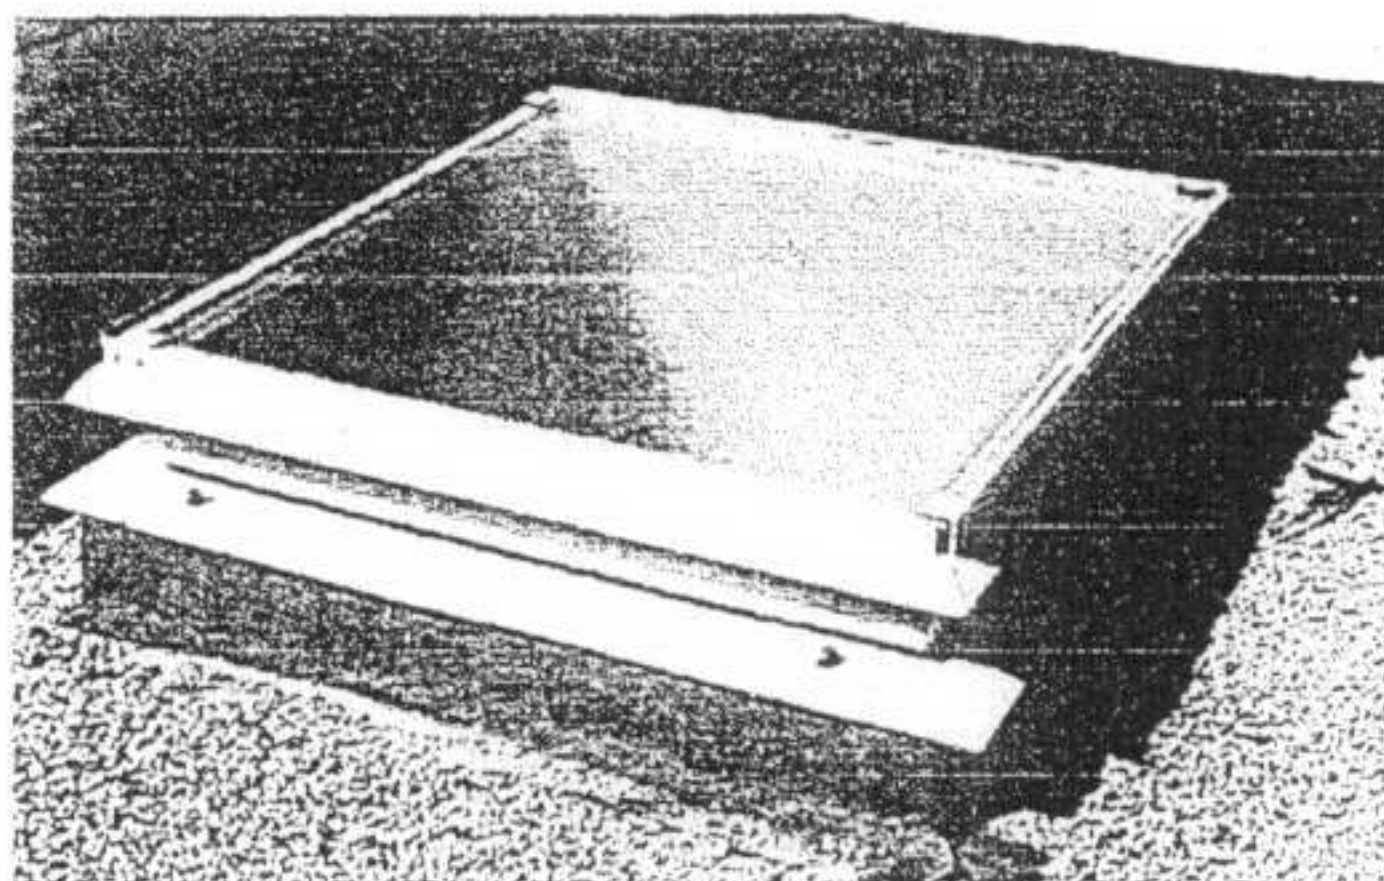
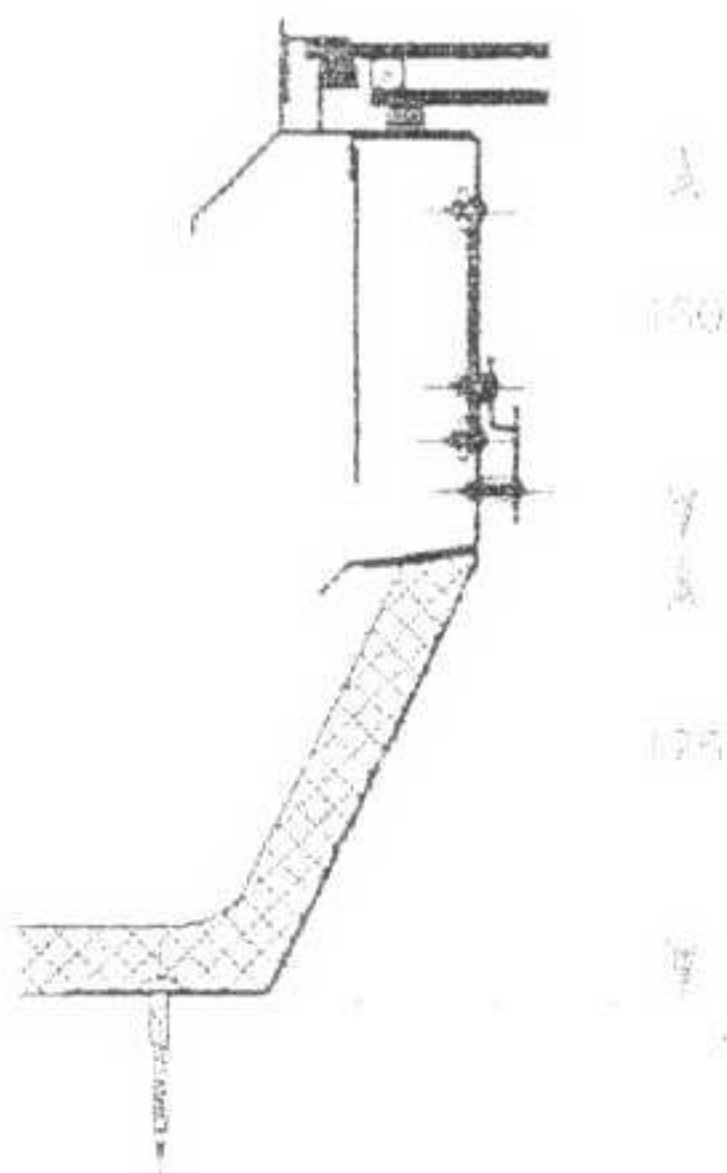


ADAPTER KERB
1500x1500
BR/ES
ADAPTER
KERB
50mm
UPSTAND

Permanent Ventilation Deadlights

Type DL/ASP

Permanent ventilation units on builders' curbs and on metal curbs. Vented on 4 sides. Available without base curb for fitting direct to existing upstand (Type DL/P).

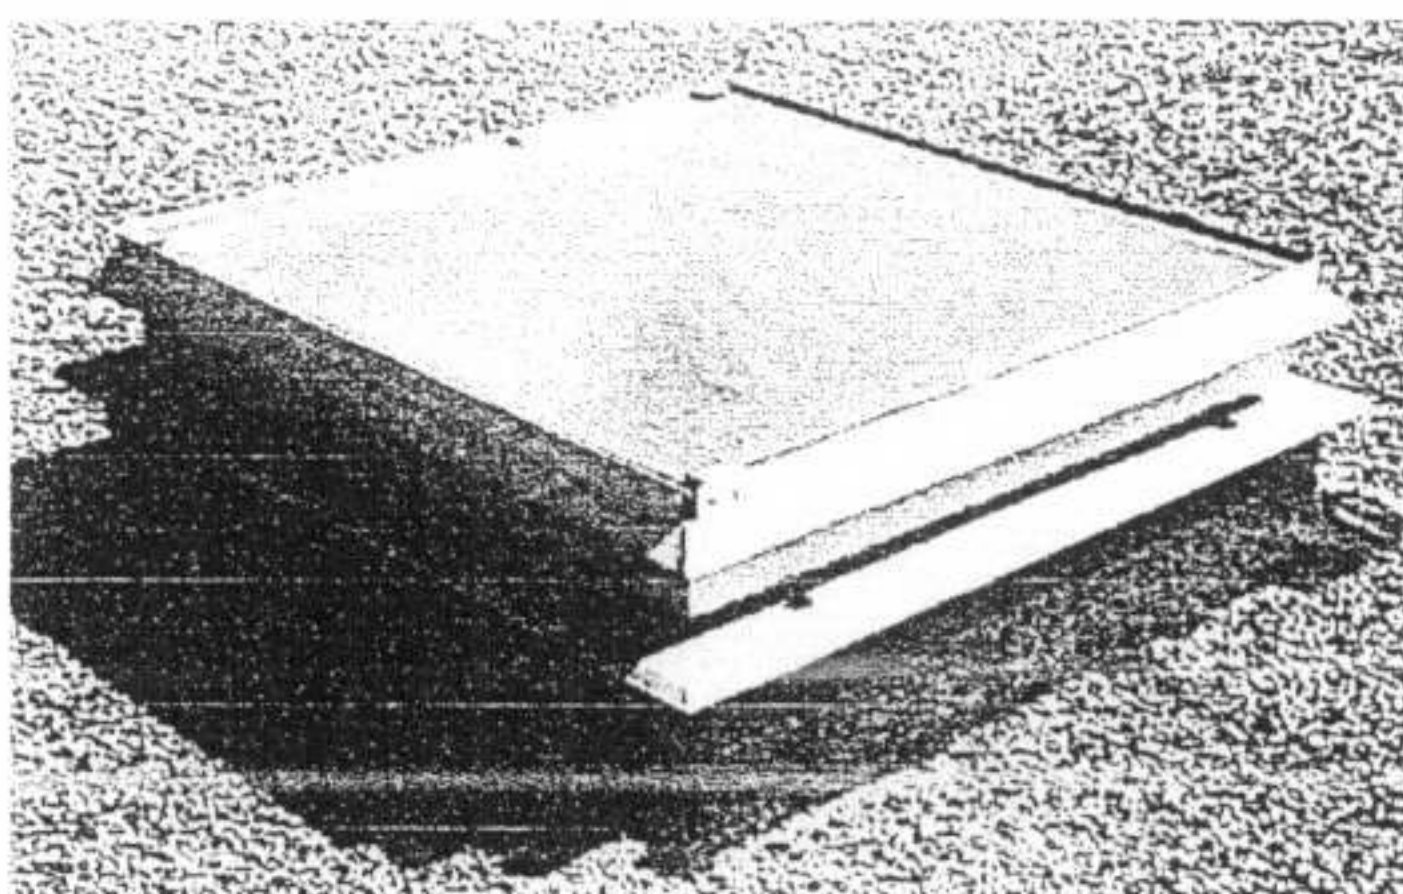
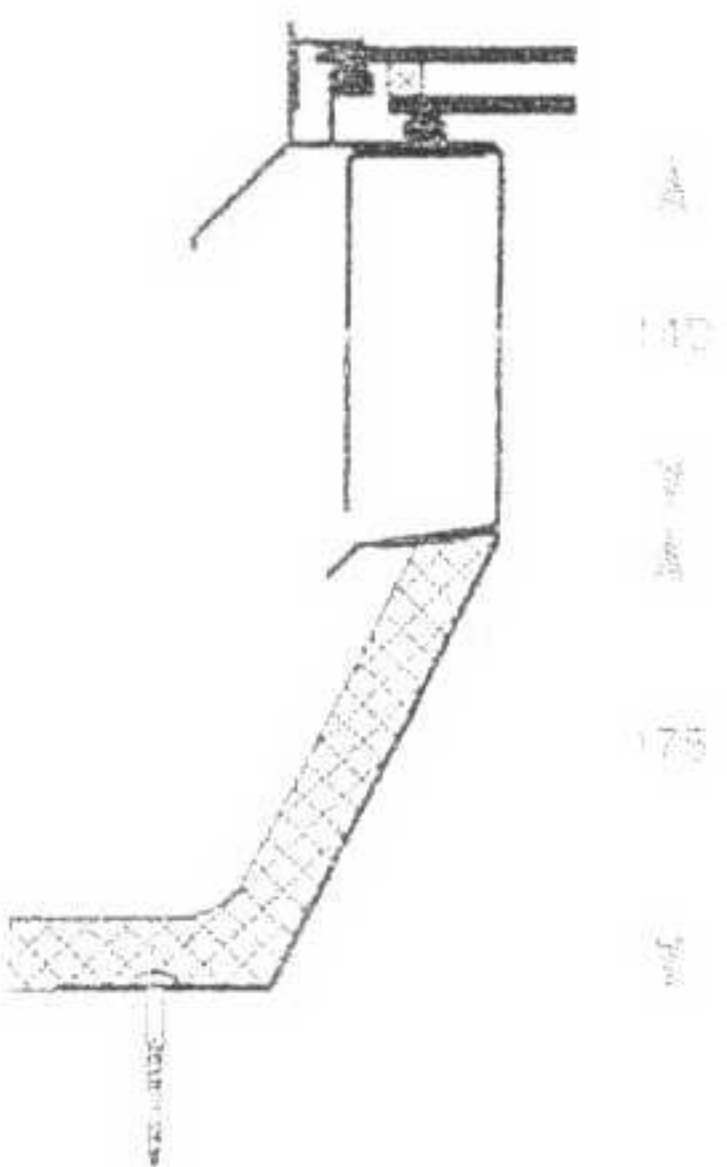


Other Products

Page 7

DUPLUS

8.3 DL/AS DEADLIGHT

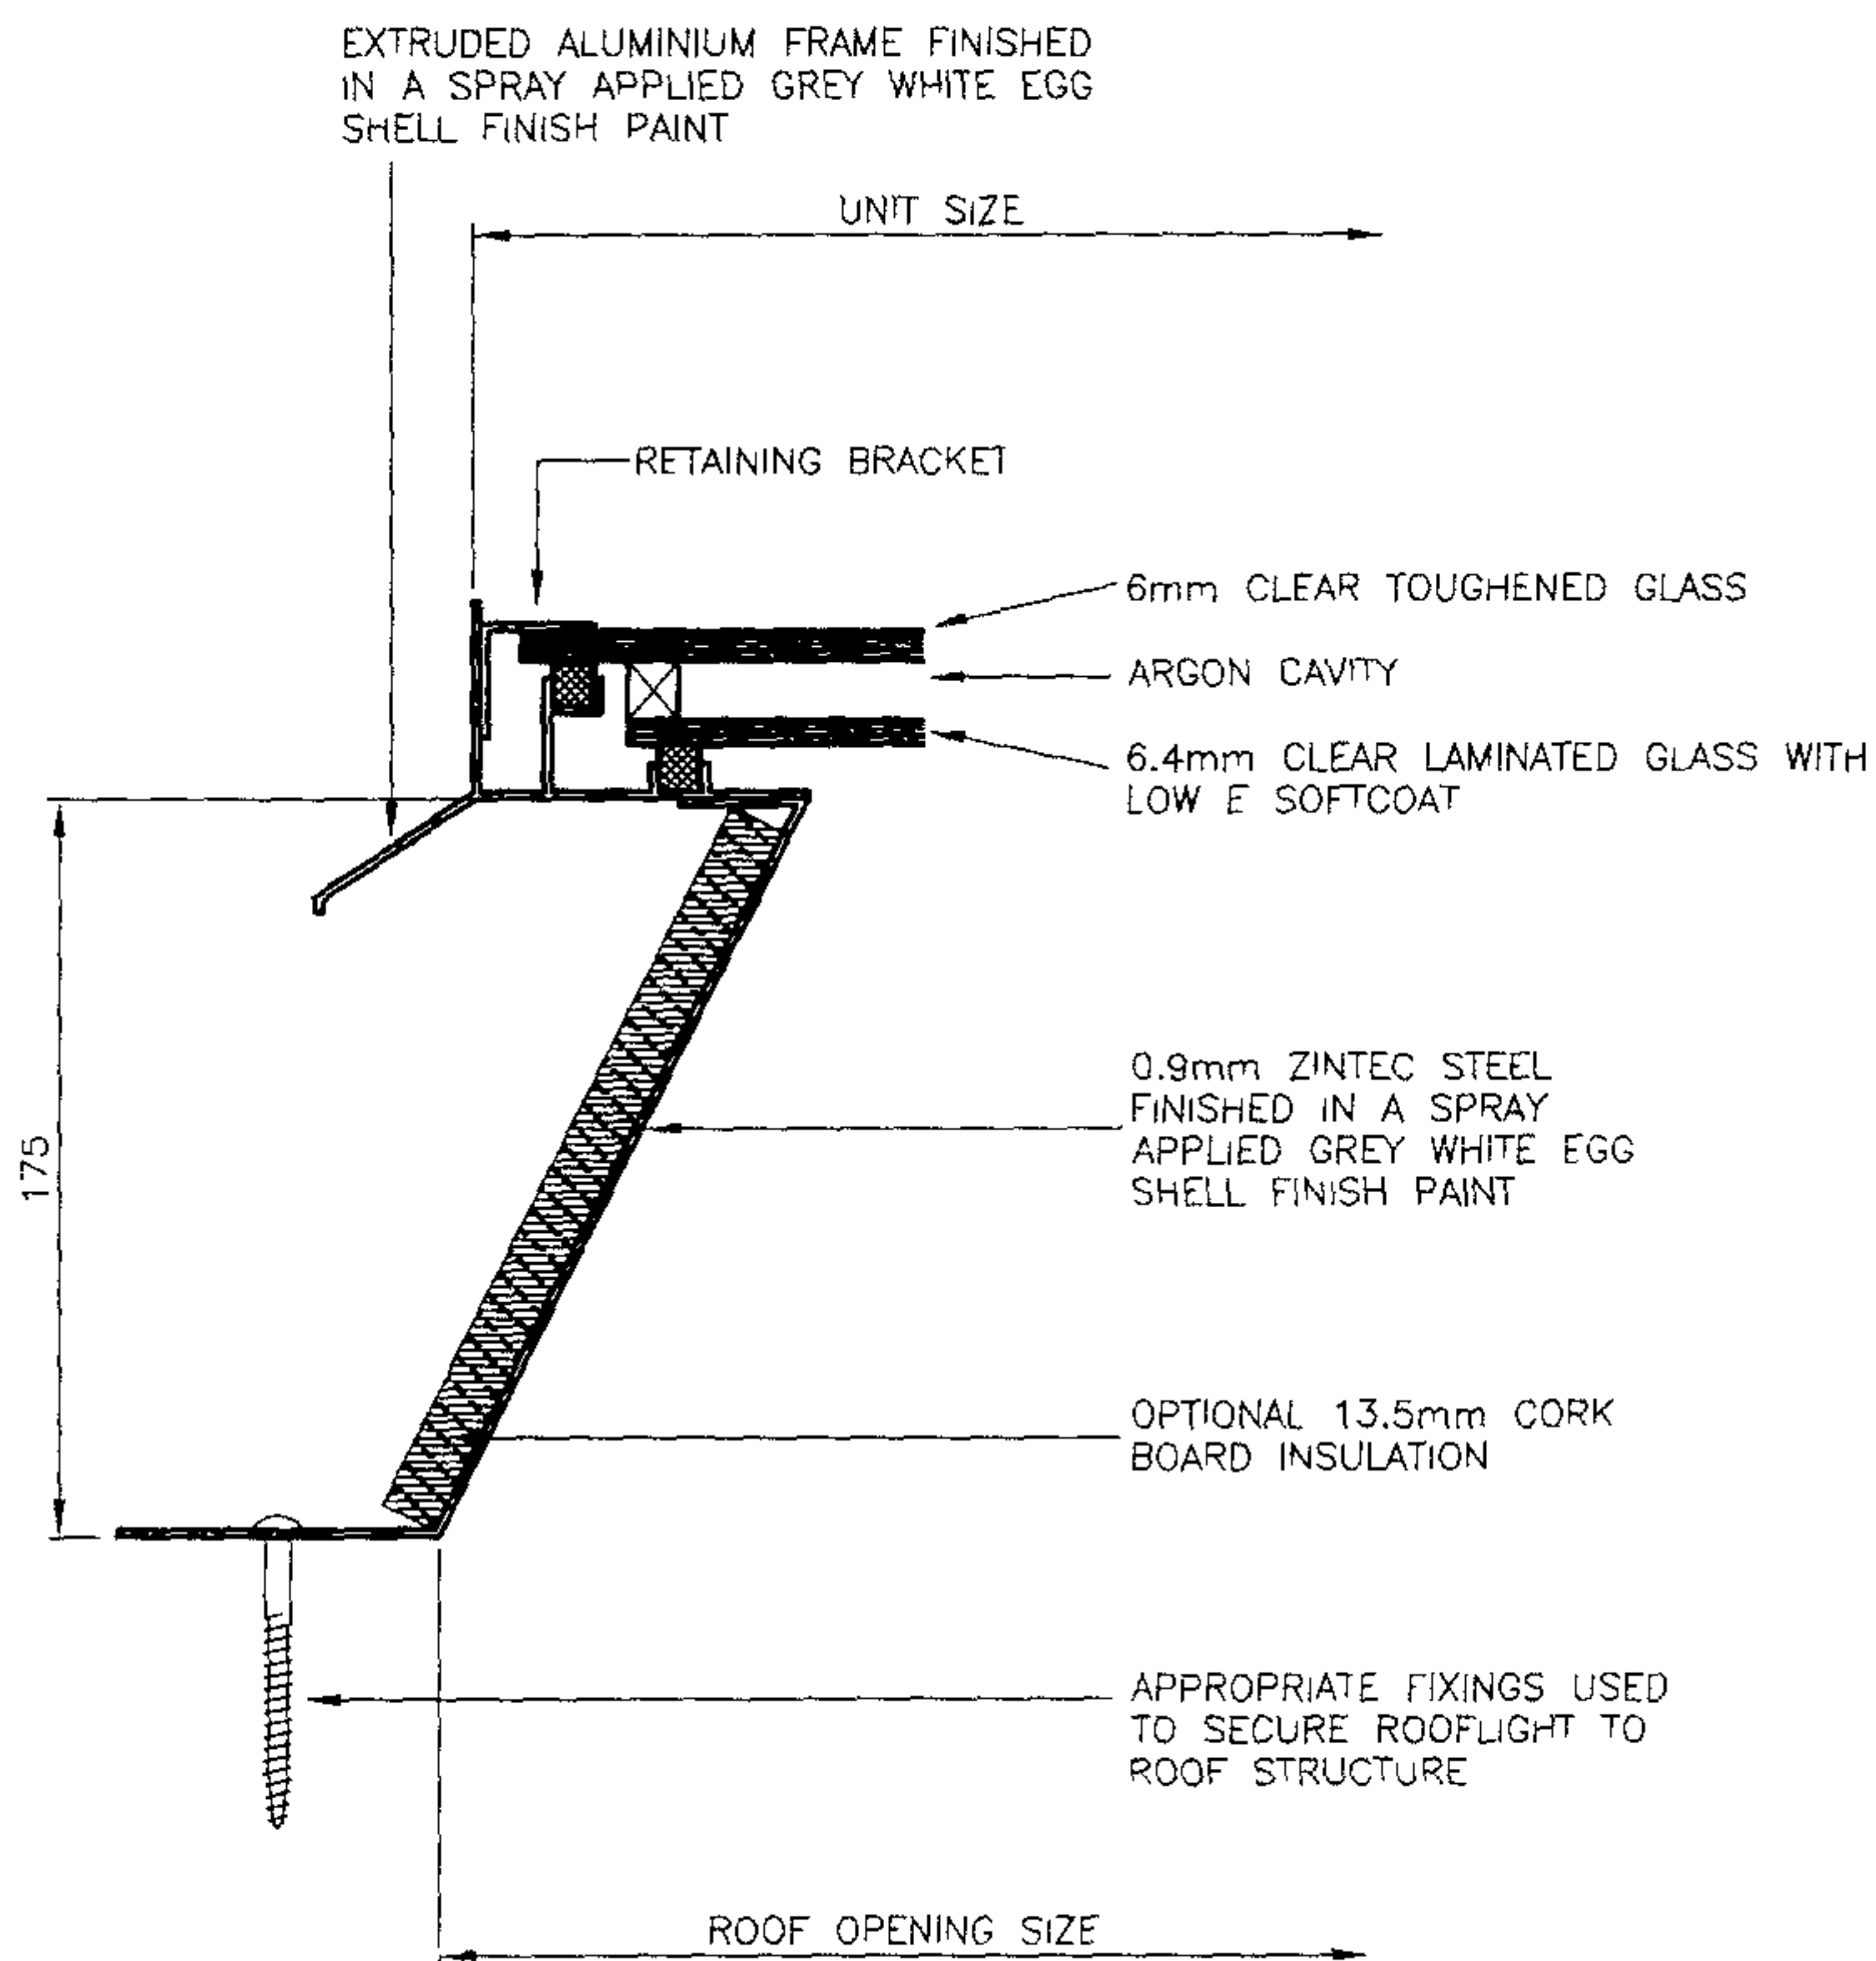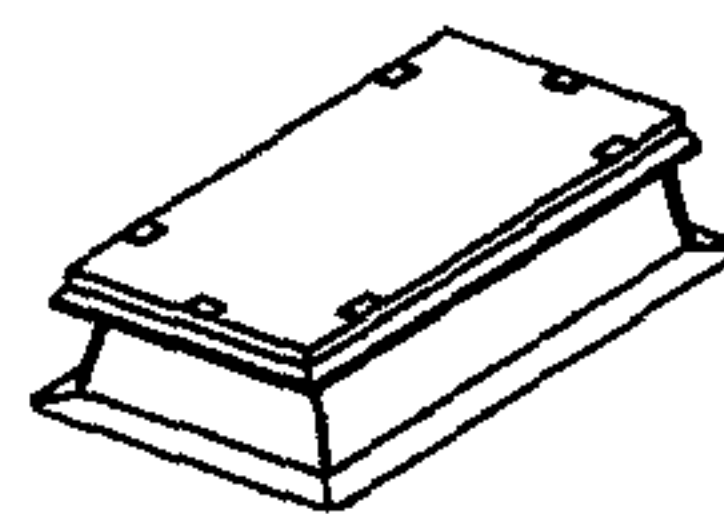



Home » Products » Roof ventilation » Universal slate ventilator

Universal slate ventilator

Ideal for new build and existing roof applications

Use

- For replacement of one normal roof slate to provide a ventilator
- Ventilating a roof space at low level or high level
- Connection to mechanical extraction from kitchen/bathrooms
- Ventilation outlet for soil vent pipe

Features & benefits

- Free vent area of 10,000mm²
- Suits slate sizes 610mm x 305mm or 510mm x 255mm
- Inconspicuous low hood design
- Can be combined with pipe adaptor kit to enable connection of 100mm soil vent pipe and/or mechanical extractor

Quality

- Manufactured to BS EN ISO 9001 : 2000
- Satisfies all NHBC Standards 2006 Edition
- Complies with all relevant Building Regulations
- Meets all relevant British Standards

Material & colour choice

- Manufactured from polypropylene
- Available in anthracite

Products in this system

- Product 4001 Slate ventilator to provide free vent area of 10,000mm²
- Product 4101 Pipe adaptor kit to fit to the underside of the slate vent to allow a standard 100mm soil vent pipe to be connected. It includes pipe adaptor, flexible PVC pipe and fixing tie
- Product 4102 Pipe adaptor only
- Product 4103 Flexible PVC pipe (500mm long) only
- Product 4104 Fixing tie only

Timloc strongly recommend that reference is made to the relevant technical information section before the products are specified, purchased or installed.

Ilmeston Road
Goulce

East Yorkshire

DN14 6UQ

(part of Alumase Group)



[Home](#) » [Products](#) » [Roof ventilation](#) » [Universal slate ventilator](#) » [Image](#)

Image

