
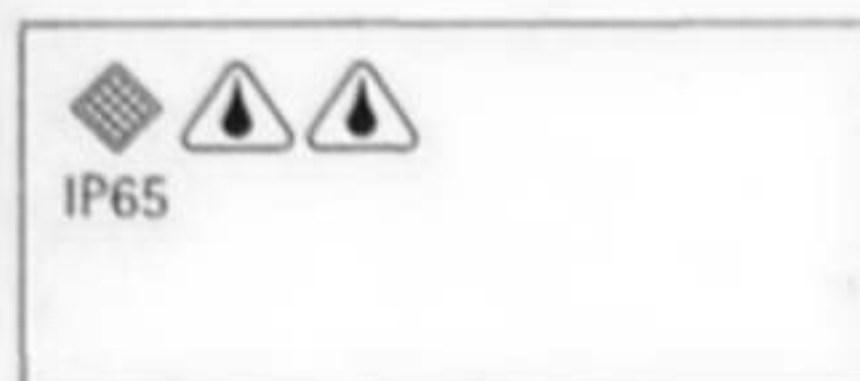
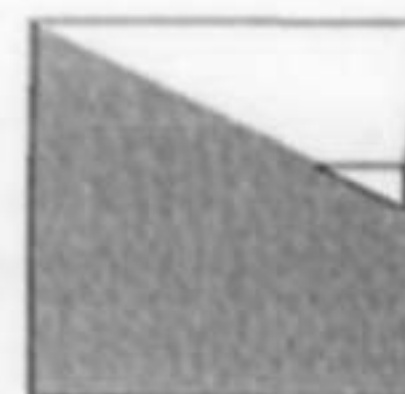
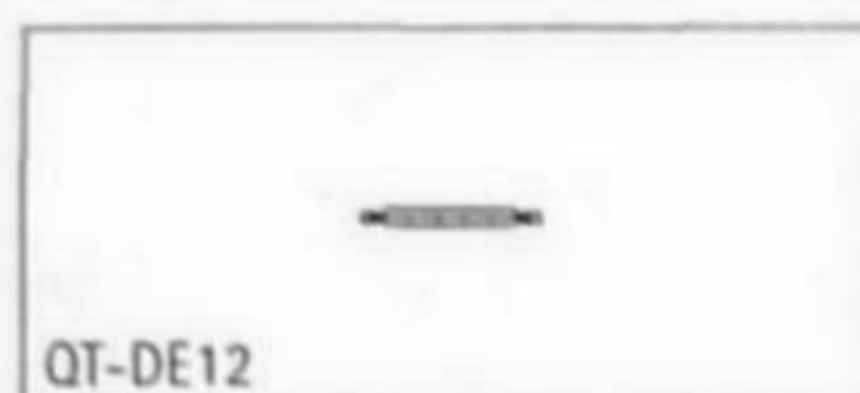
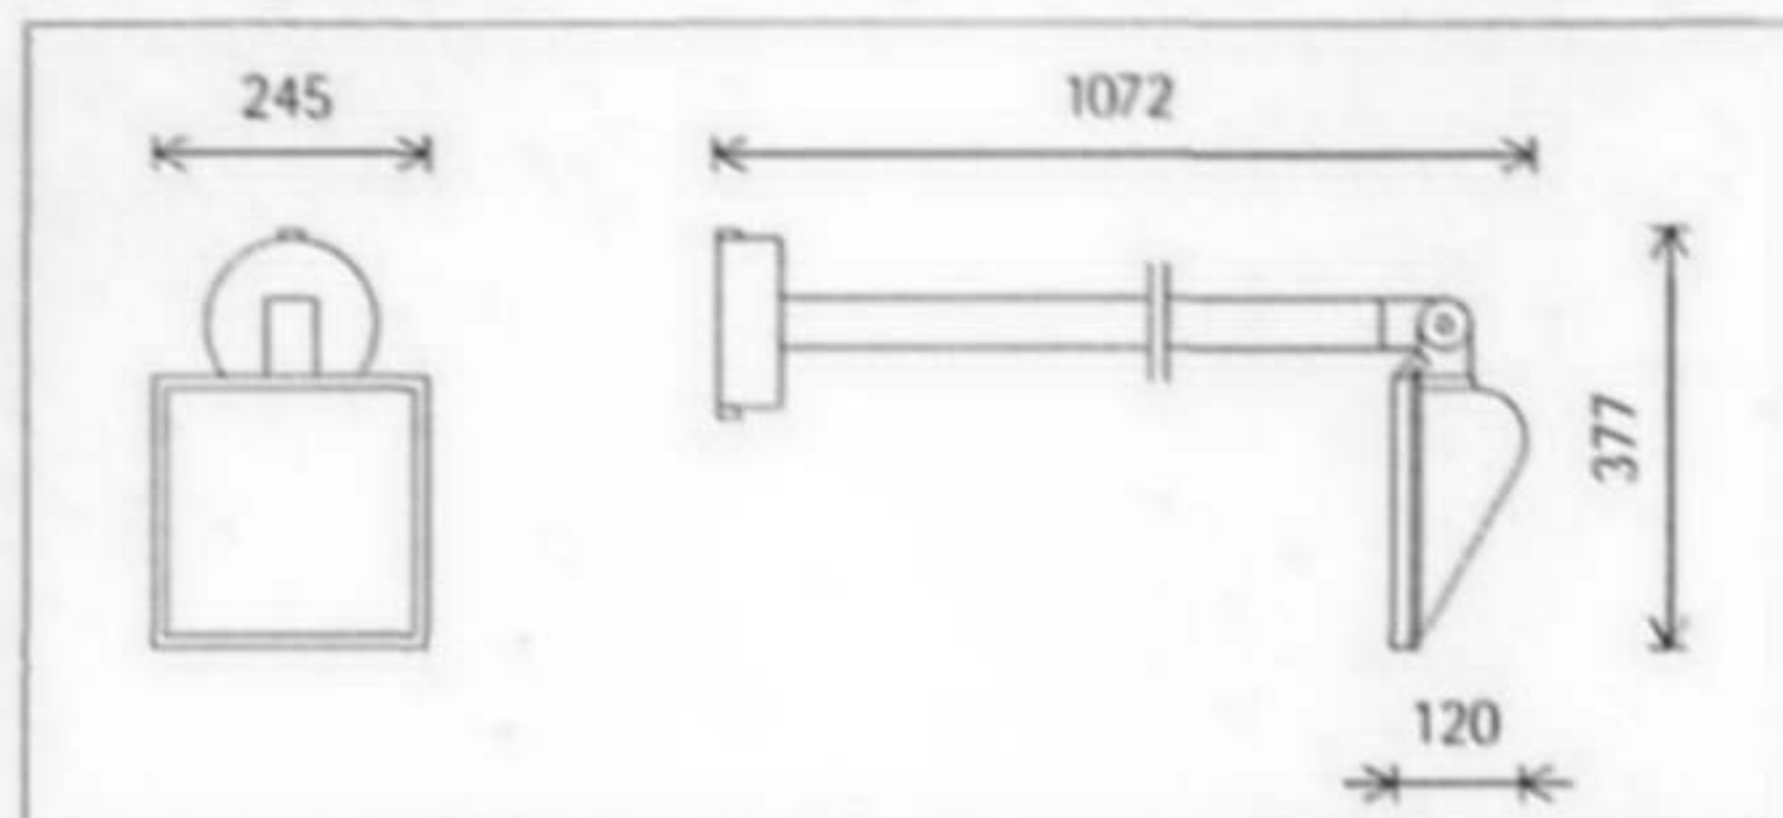


ERCO

Parscoop II Washlight

with cantilever for tungsten halogen lamps

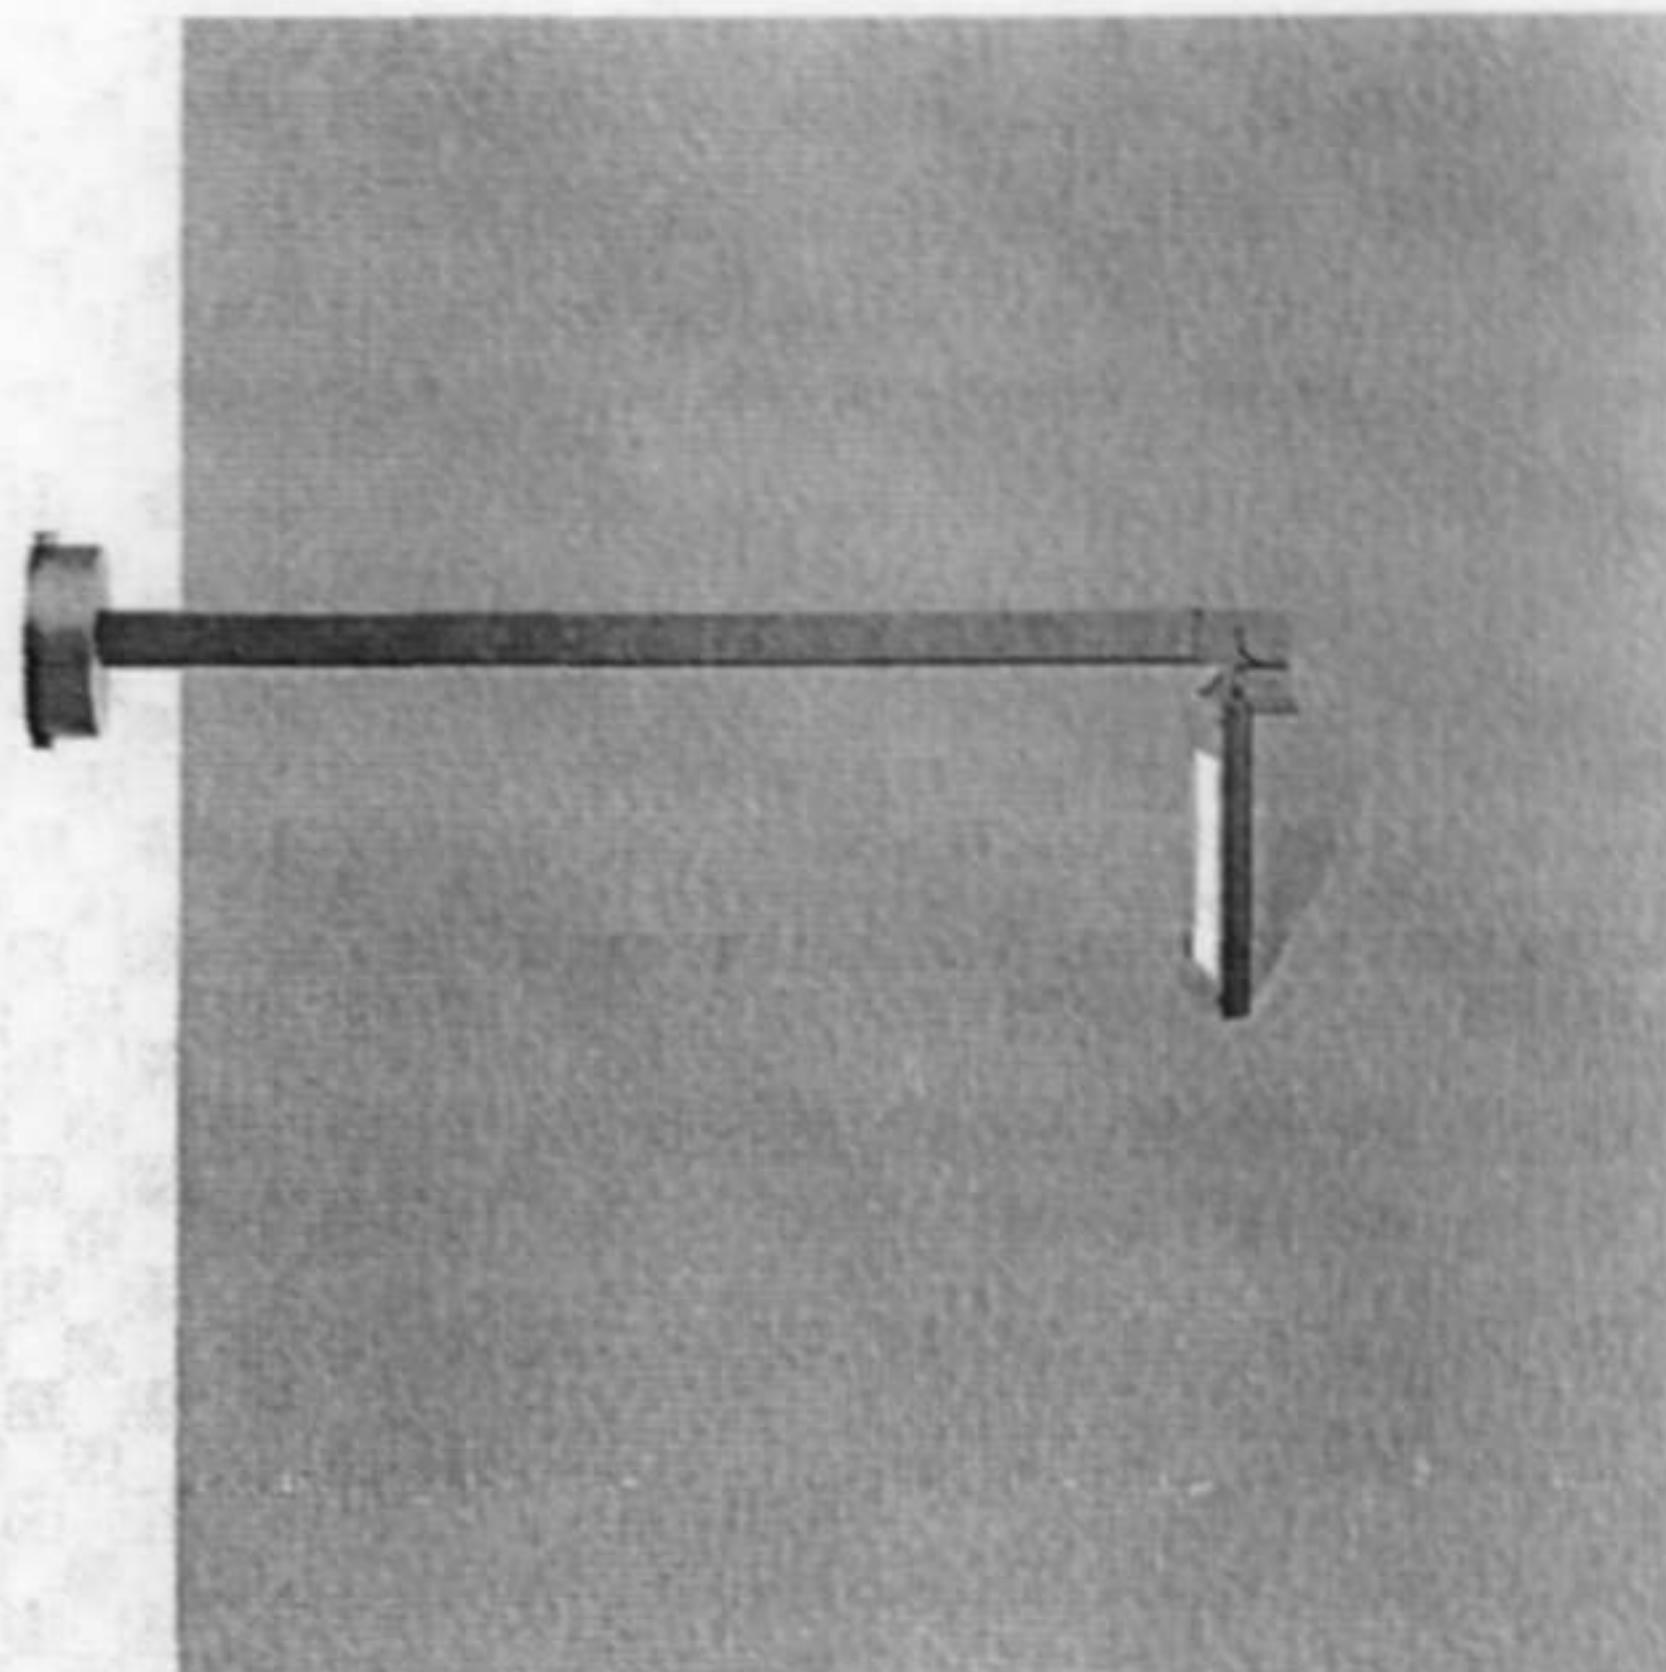

33290.000 Graphit m
QT-DE12 300W 230V R7s L114mm
5300lm

Product description

Housing, hinge and mounting plate: corrosion-resistant cast aluminium, No-Rinse surface treatment. Double powder-coated. Optimised surface for reduced accumulation of dirt. Hinge with internal wiring, $\pm 90^\circ$ tilt. Graduated disc: corrosion-resistant aluminium. Mounting plate rotatable through 240° .

Cantilever: stainless steel tube, powder-coated.

2 cable entries. Through-wiring possible. 3-pole terminal block.


Reflector: aluminium, silver anodised. Without spill light.

Screw-fastened cover frame with safety glass: corrosion-resistant cast aluminium, double powder-coated. Hinge open for lamp replacement.

Protection mode IP65: dust-proof and water jet-proof.

Weight 6.70kg

Maximum wind load area 0.1m^2

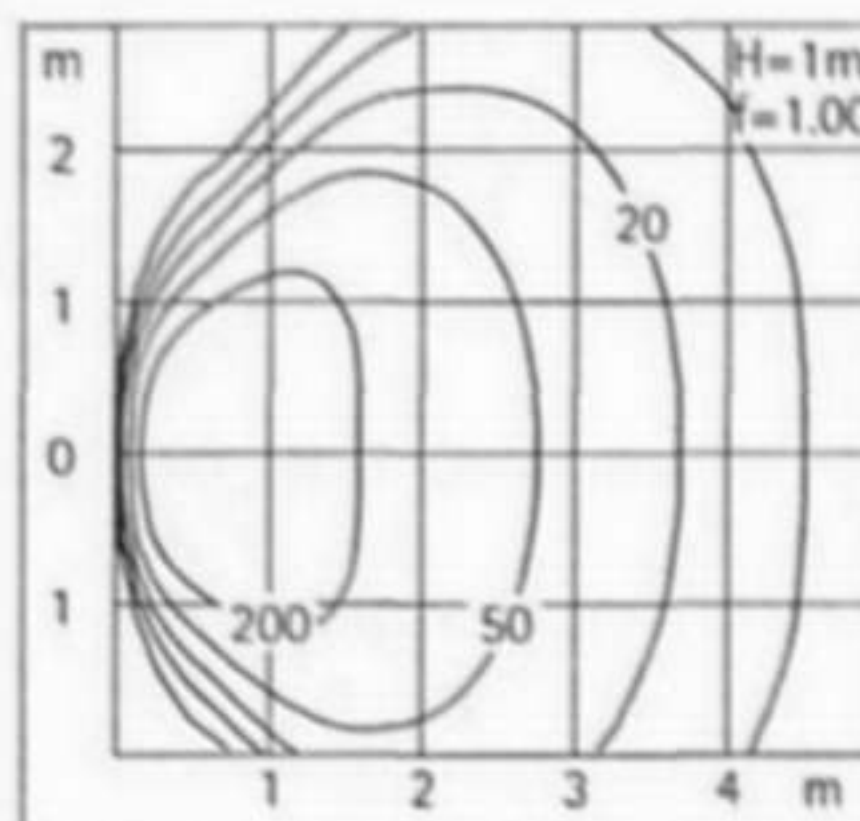

RECO
20 SEP 2006

ERCO Lighting Ltd.
38 Dover Street
London W1 S 4 NL
Great Britain
Tel.: +44 20 7408 0320
Fax: +44 20 7409 1530
info.uk@erco.com

ERCO Lighting
Representative Office Australia
349 Pacific Highway
North Sydney NSW 2060
Australia
Tel.: +61 2 9004 8801
Fax: +61 2 9004 8805
info.au@erco.com


Technical Region: 240V/50Hz
Edition: March 15, 2006
Please download the current version from
www.erco.com/33290.000

Planning data

Cleaning (a)	1				2				3			
Ambient conditions	P	C	N	D	P	C	N	D	P	C	N	D
LMF	0.98	0.94	0.90	0.86	0.95	0.91	0.86	0.81	0.94	0.90	0.84	0.79
RSMF	0.99	0.98	0.96	0.95	0.97	0.96	0.95	0.94	0.97	0.96	0.95	0.94

Hours of operation (h)	1000	2000
LLMF	0.98	0.95
LSF	1	1


MF	LMFxRSMFxLLMFxLSF
MF	Maintainance Factor
LMF	Luminaire Maintenance Factor
RSMF	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor
P	Room pure
C	Room clean
N	Room normal
D	Room dirty

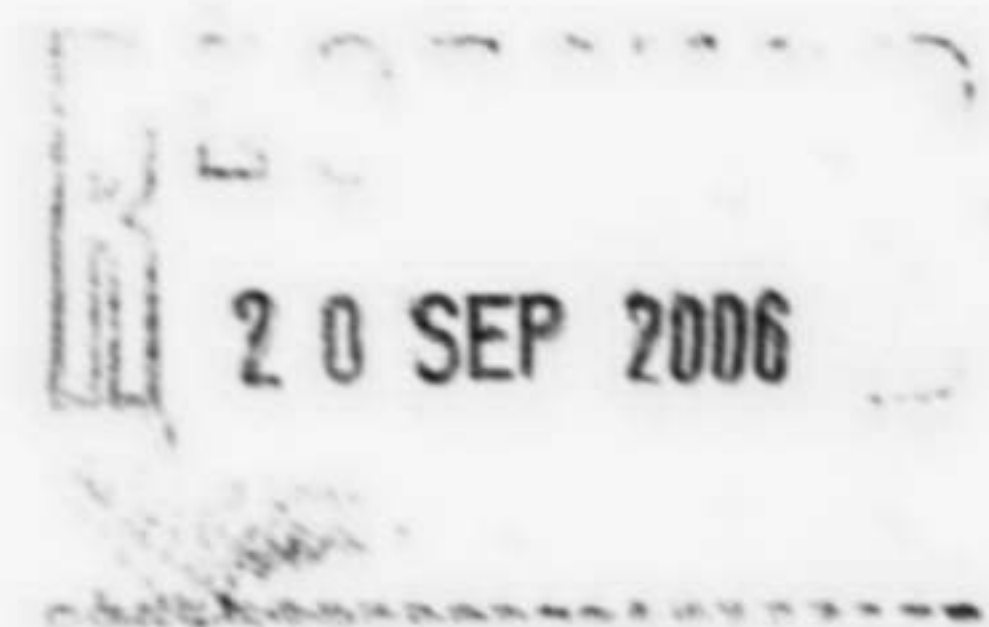



ERCO

Parscoop II Washlight



Accessories

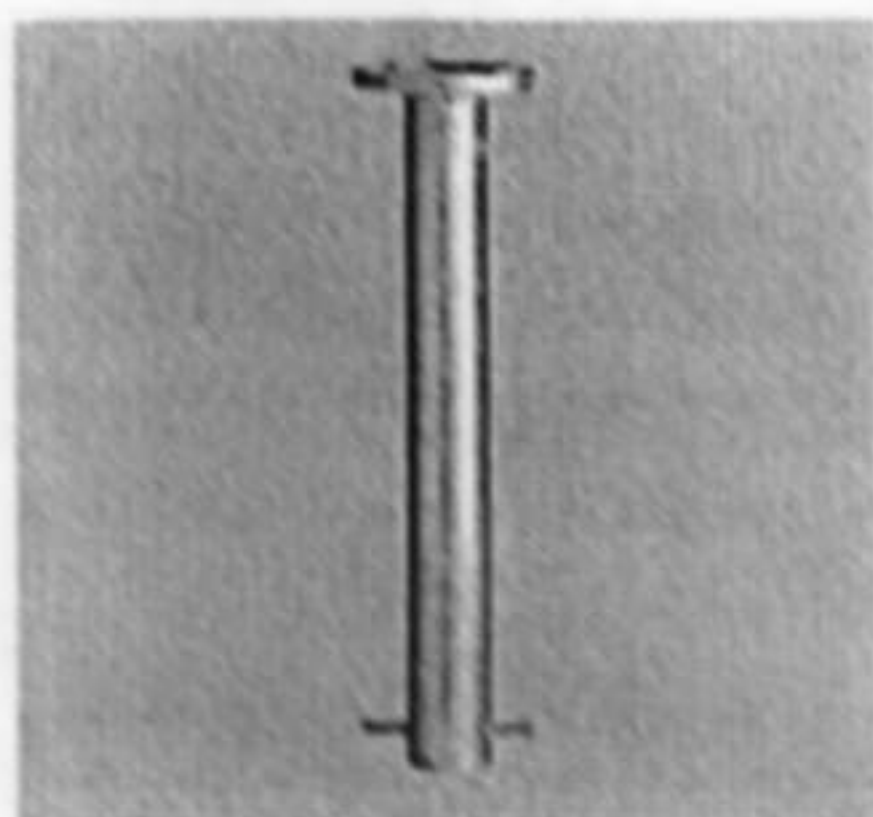


33974.000
Ground socket
Metal, hot-dip galvanised.
Cable entry.

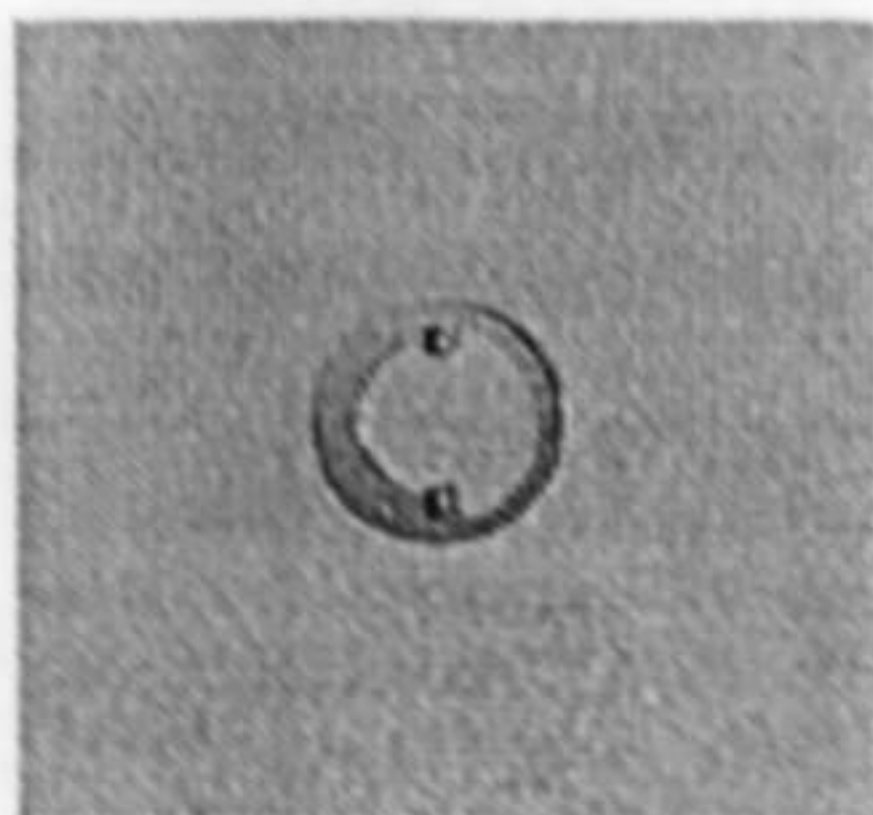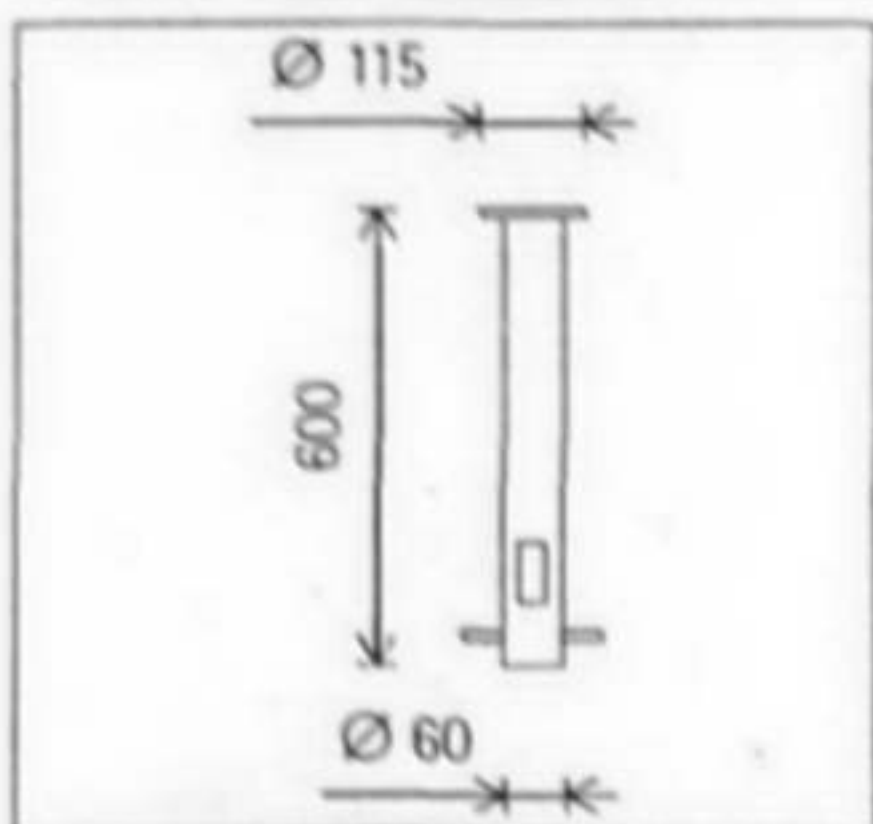


34990.000
Spacer
for cables mounted on top of
plaster.
Corrosion-resistant cast aluminium, No-Rinse surface treatment.
Graphit m double powder-coated.
Weight 0.16kg

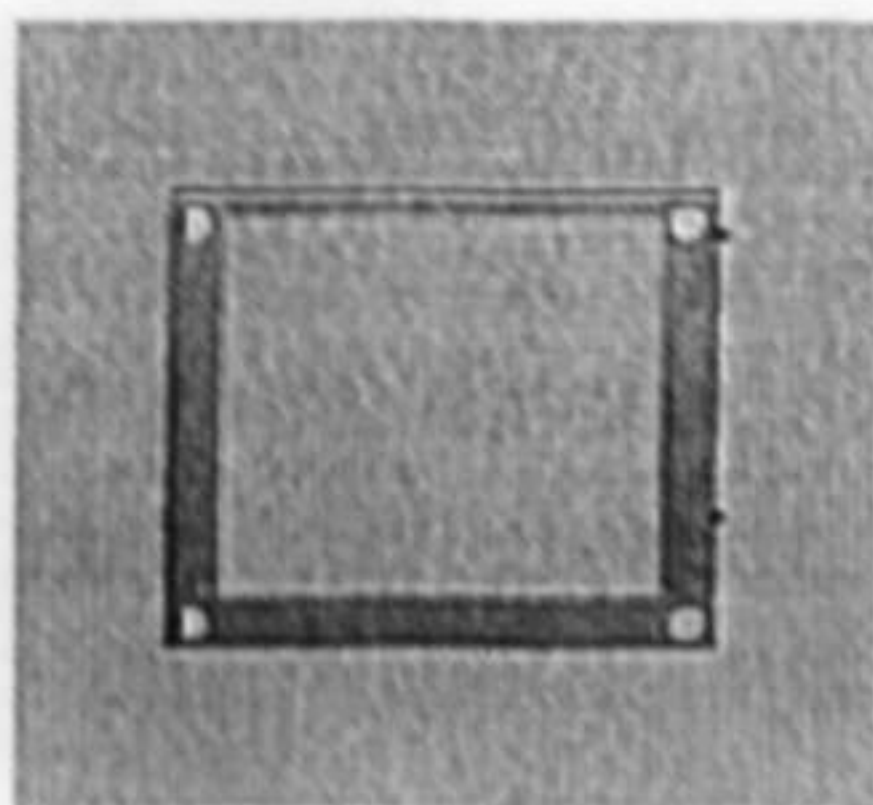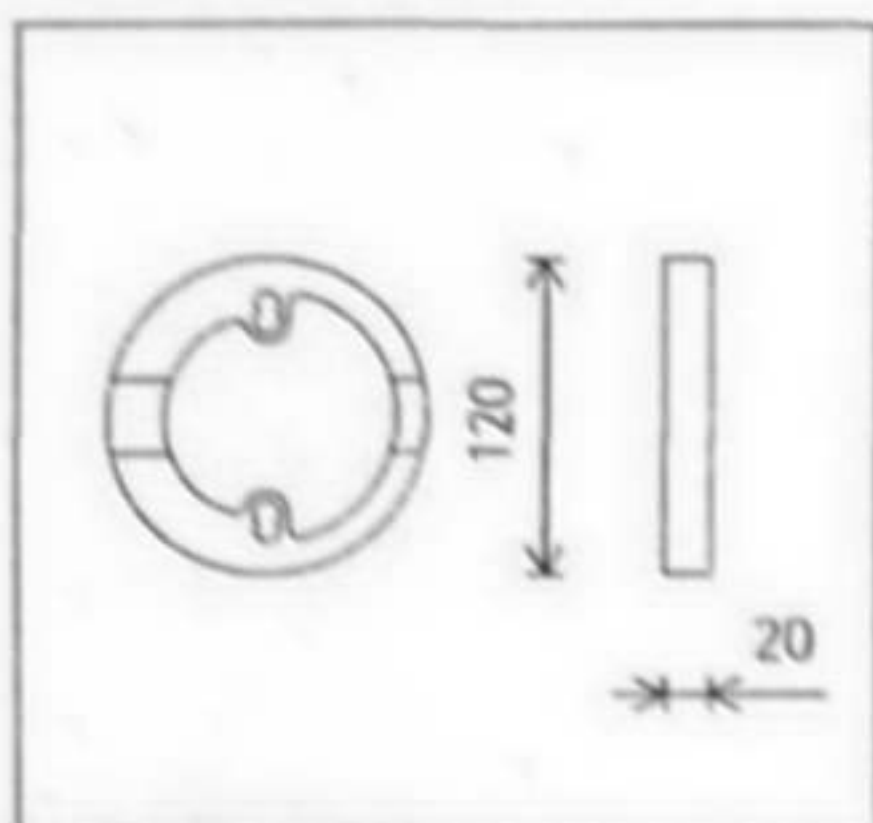


34901.000
Fixing frame
for filters.
Metal, graphit m powder-coated.

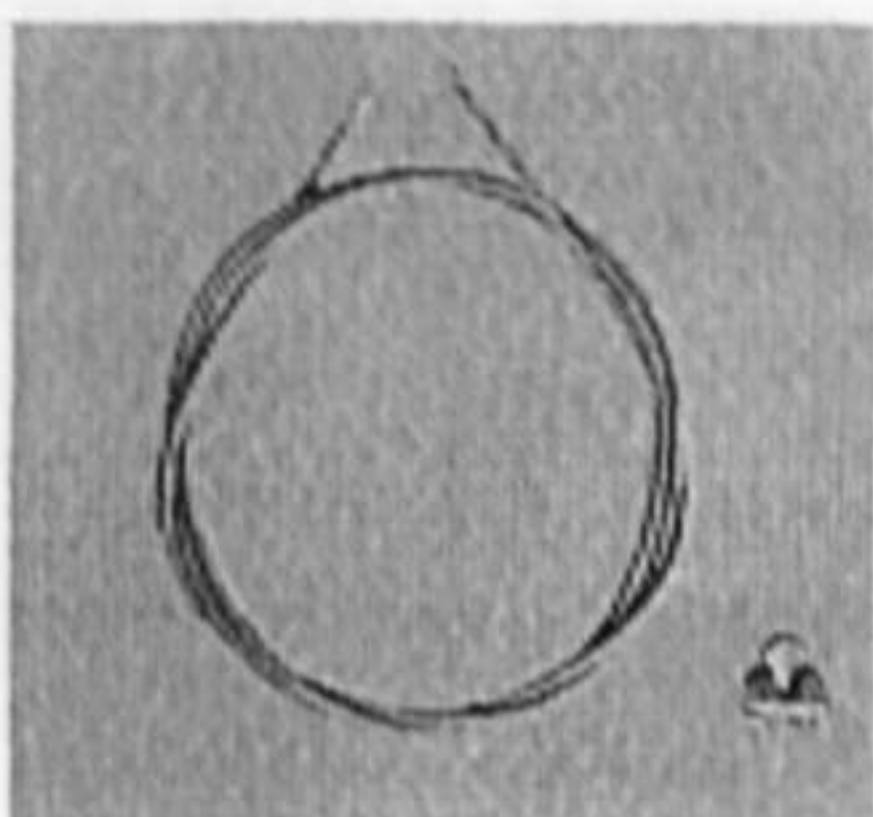


34966.000
Safety cord
Stainless steel, ø 3mm, L 1,000mm.
Clamp.
Weight 0.06kg

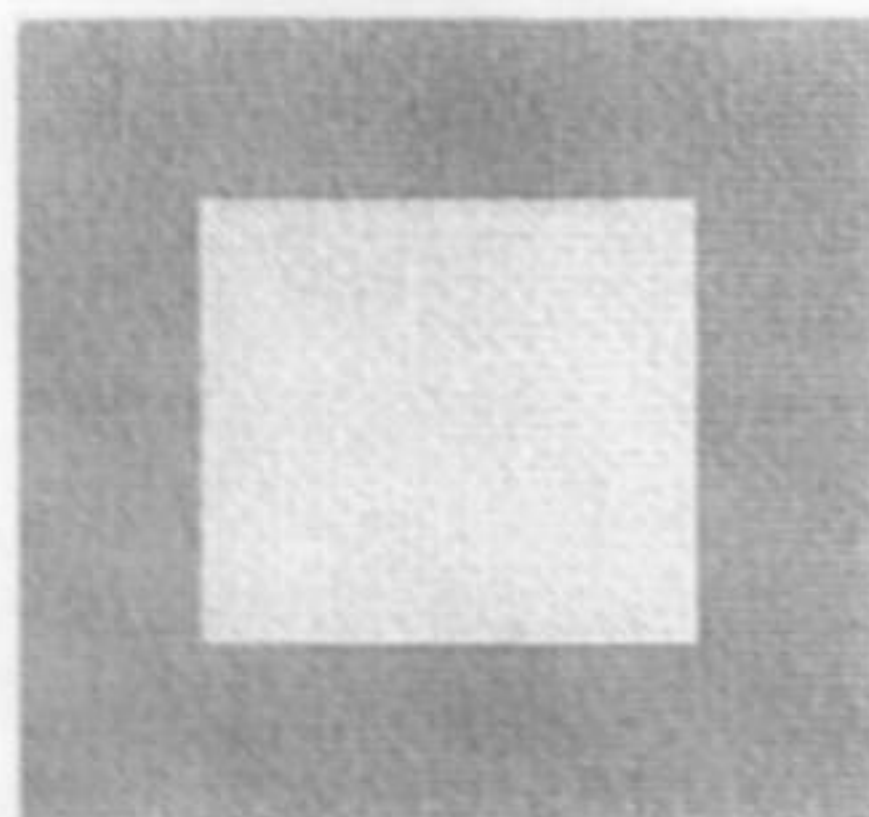


34925.000
Skintone filter
Only in conjunction with:
34901.000

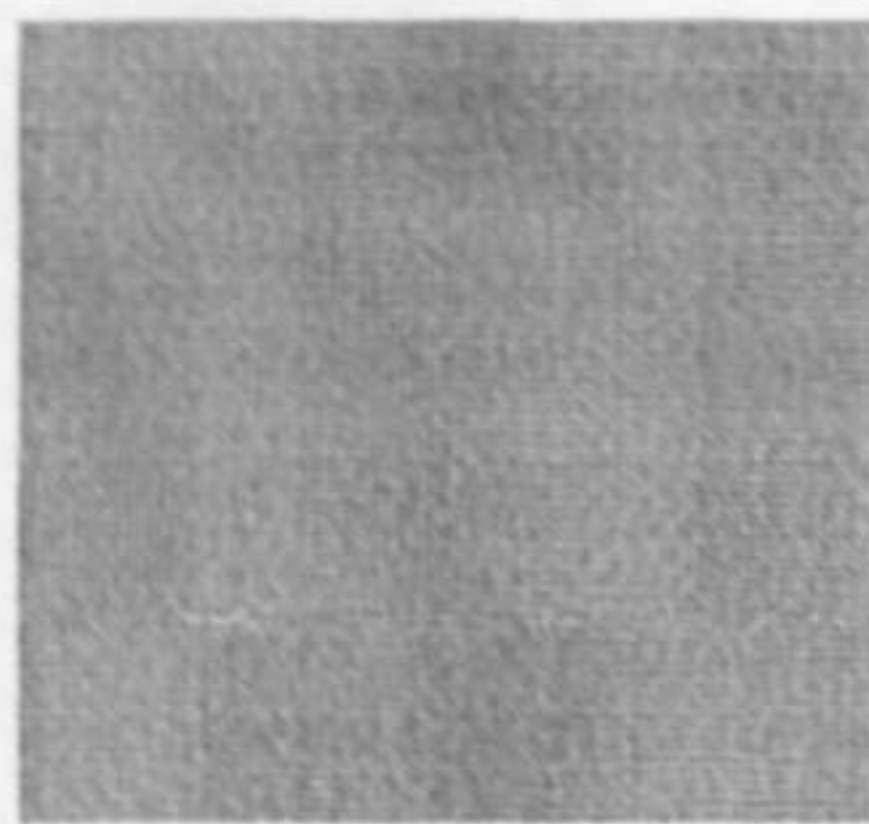


34924.000
Daylight conversion filter
Only in conjunction with:
34901.000

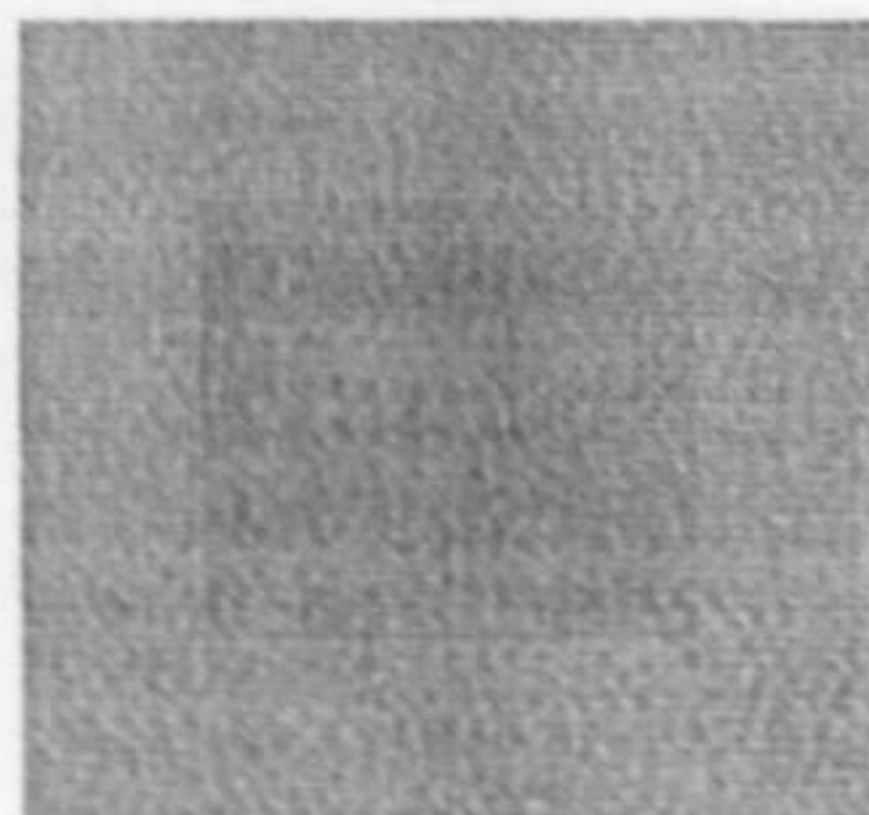


34920.000
Colour filter
Magenta
Only in conjunction with:
34901.000

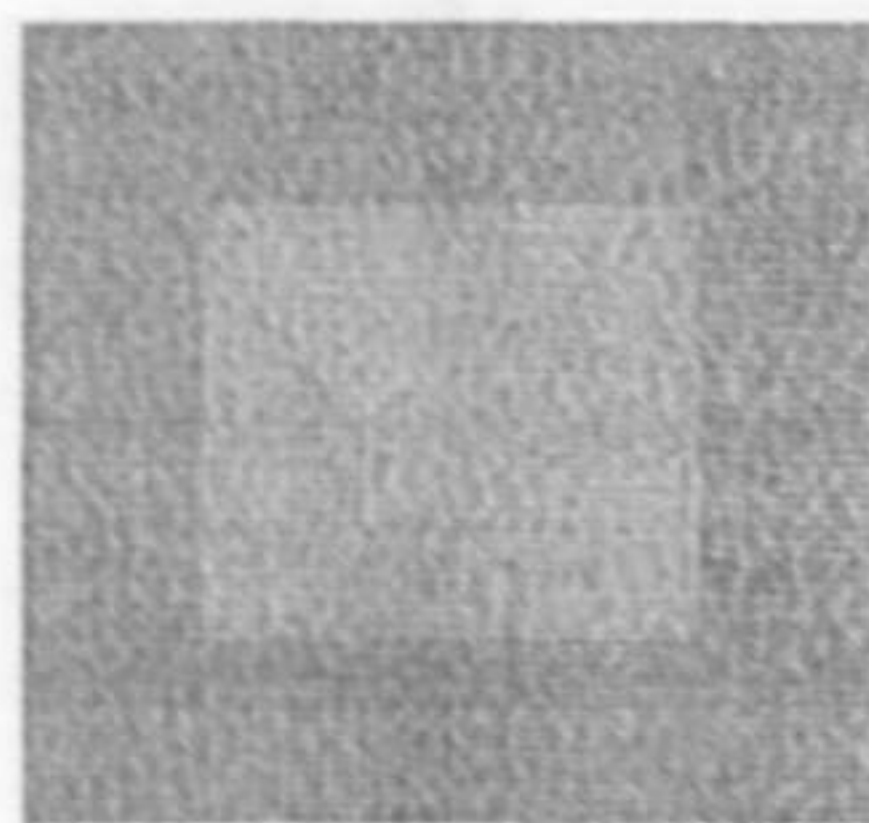

34921.000
Colour filter
Amber
Only in conjunction with:
34901.000

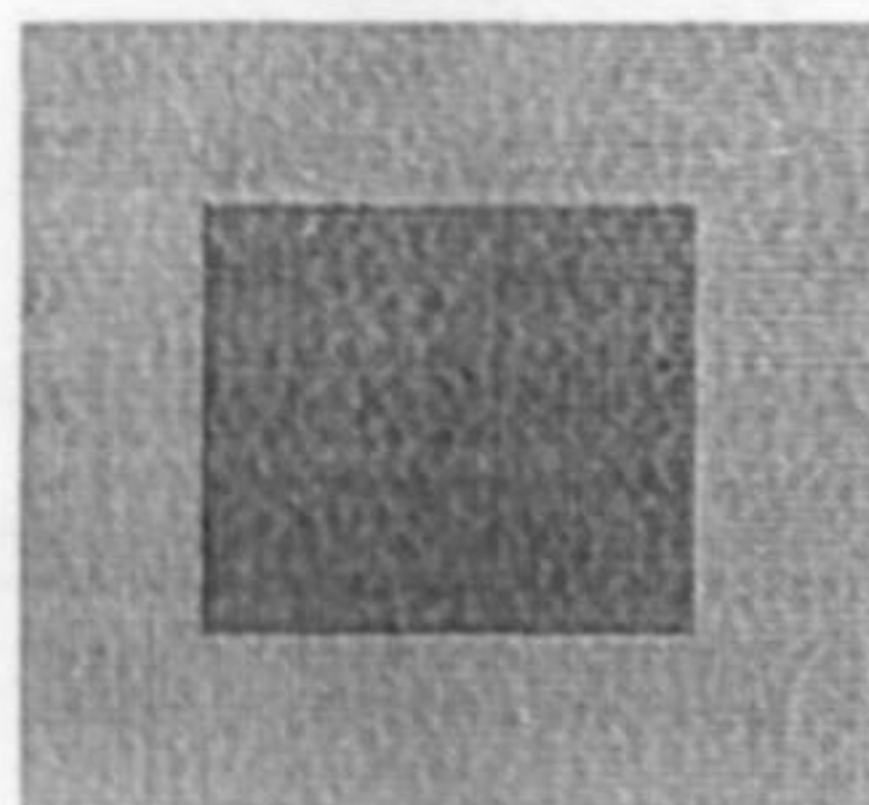

34922.000
Colour filter
Sky blue
Only in conjunction with:
34901.000

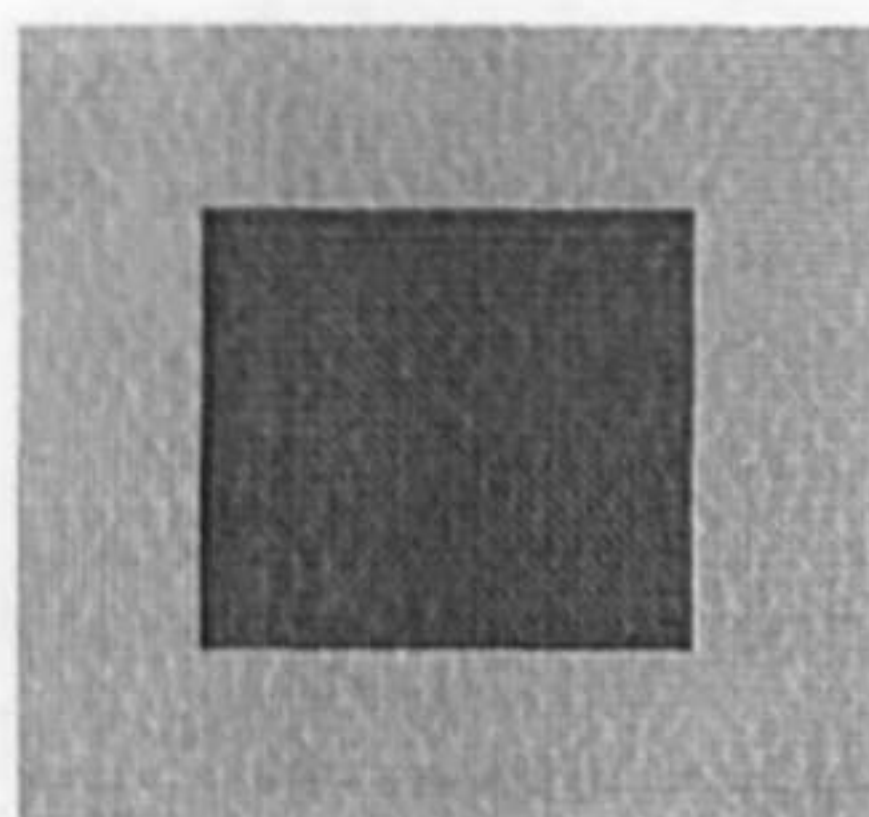

34923.000
Colour filter
Night blue
Only in conjunction with:
34901.000