



The Universal SunMount™


Fits PV panel widths between 960-1060mm and any length.

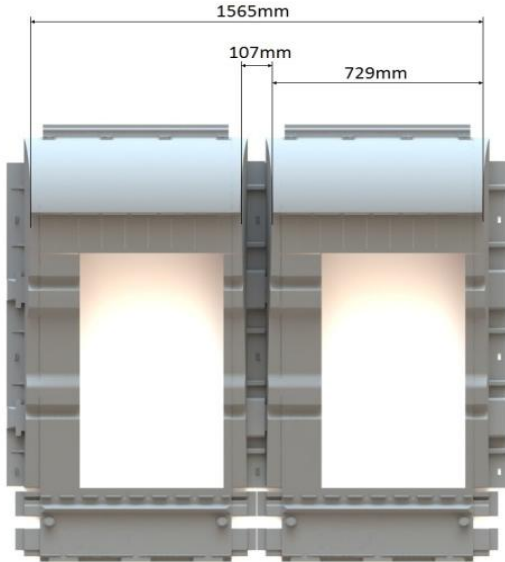

Two SunMounts

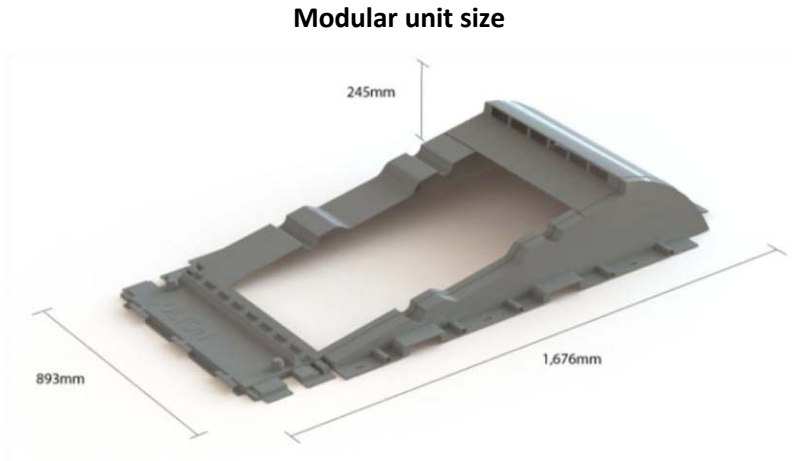

Modular unit size

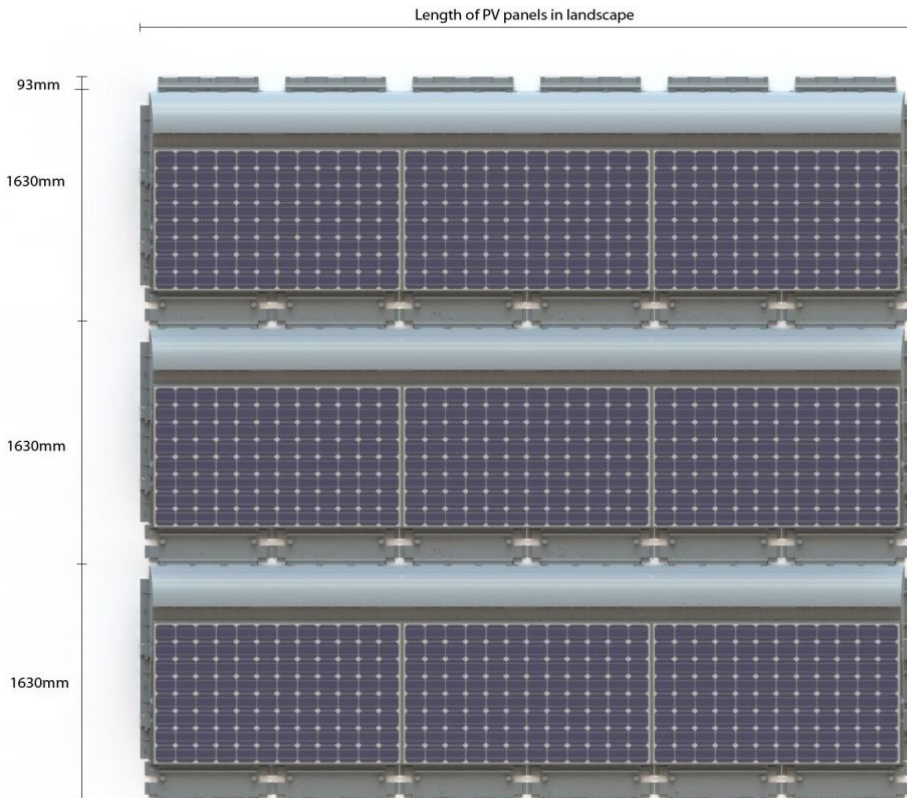

- Withstands winds of 120 mph
- No roof Penetration
- Fast installation
- 1 modular unit
- Interlocking units
- Low Loading (10 kg/m²)
- 10° tilt angle
- 20 years guarantee
- Easy to transport (5-6kW_p/pallet)

Universal SunMount™

Specification Sheet

Compatible PV panel dimensions:

X-direction:	Any PV panel length
Y-direction:	960 – 1060 mm
Depth :	35 – 50mm

Colour	White
Average modular unit area:	1.497 m ²
Average full SunMount area (2 units interlocked)	2.80 m ²
Average weight of full SunMount (2)	9.53 kg
Average roof loading with PV module:	10 kg/m ²
SunMount tilt angle:	10 ⁰ for best ratio of power generation to surface area exploitation for European climate.
Maximum wind speed uplift resistance:	112 mph
SunMount Material:	Polypropylene UV stabilised.
Product life guarantee:	20 years.
Transport:	50 SunMounts (5-6kW _p) per double size pallet
PV cable connection:	Easy cabling connection/disconnection can be carried out from the top and placed in recesses with covering strips.
Aesthetics:	Flush modules give an integrated appearance.
Interlocking method:	Left to right interlock by latches and with overlapping of front to back secured with stainless steel screws.

