



Manufacturing
Air Filters in
the UK for
Over
40
Years

Baffle Filter Model GFBS Stainless Steel



GENERAL DESCRIPTION

These filters are designed for use in commercial kitchens and ventilation from food preparation areas where their primary function is to prevent flame from travelling from the cooking area up into the extract duct.

Construction

These filters are manufactured by rolling stainless steel to create a series of baffle plates which are welded onto a sub frame. The sub frame is then wrapped with the outer frame.

Features

- Strong Double frame construction
- Scratch Free outer surface
- Bright Polished Surface
- Fold down handles
- Drain Holes
- Rolled Safety Edges
- Low Pressure Drop
- Ex-Stock Delivery


Frame Material

- Stainless Steel to Specification BS1449(2)
- Bright Polished Surface



STANDARD SIZES

Jasun Envirocare always specify filters as Height (H) x Width (W) This is particularly important with baffle filters because the handles will always go on the H edge, the blades will always run along the H edge, and the drain holes will always be in the W edge

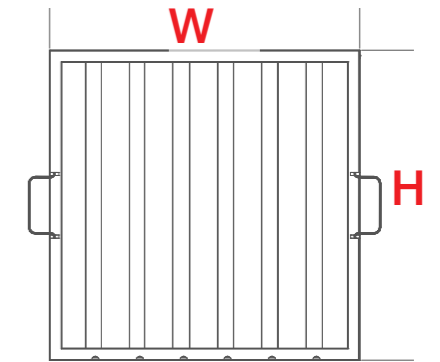

Part No.	Nominal Size Inches	Height (mm)	Width (mm)	Depth (mm)	Rated Airflow m ³ /hr
GFBS-1020	10 x 20 x 2	241	495	45	644
GFBS-1212	12 x 12 x 2	292	292	45	460
GFBS-1216	12 x 16 x 2	292	394	45	621
GFBS-1224	12 x 24 x 2	292	594	45	937
GFBS-1616	16 x 16 x 2	394	394	45	838
GFBS-1620	16 x 20 x 2	394	495	45	1053
GFBS-1625	16 x 25 x 2	394	622	45	1323
GFBS-1818	18 x 18 x 2	445	445	45	1069
GFBS-2010	20 x 10 x 2	495	241	45	644
GFBS-2016	20 x 16 x 2	495	394	45	1053
GFBS-2020	20 x 20 x 2	495	495	45	1323
GFBS-2025	20 x 25 x 2	495	622	45	1663
GFBS-2424	24 x 24 x 2	597	597	45	1925

Pressure Drop	
Velocity 1.5m/second	190Pa

