







Proposed Pleached Tree
Planted within soft landscape as
per the tree detail




Proposed Hedge
To be planted in double staggered lines,
to a density of 4/m2 to receive 75mm
bark mulch after planting operations




Proposed Shrub Mix
To be planted in groups of 5-9no, to
a density of 5/m2.to receive 75mm
bark mulch after planting operations

Paving
Sawn Yorkstone Paving




Proposed climbing plants
To be trained up adjacent wall/ fence/ with
galvanised wires and hook set 250mm apart
with support canes removed prior to planting



To be laid with high quality turfs. Best laid in late winter/early spring when the ground has not dried out and the growing season is approaching. During spring through to late summer will need more attention to ensure that they do not dry out.

Turves should ideally be laid within 24 hours of delivery, 3 days should be considered the absolute maximum in sheltered & cool conditions. Arranged for the turves to be delivered once the site is completely prepared.



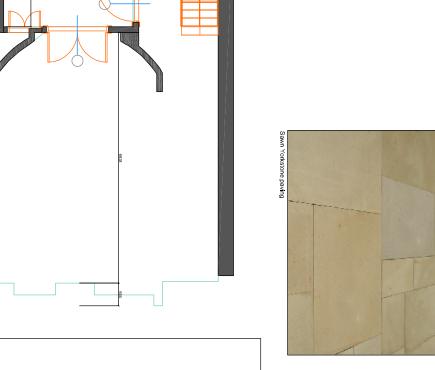

	No.	Density	Height	Size	Habit	Standard	Clear ster Pot size	Pot size
TREES								
Tilia cordata	6	no	400-450cm	16/18cm	Pleached Semi	Semi Mature 200cm	200cm	
SHRUB								20-35L
Rosemary officinalis	10	5m2						20-35L
Salvia var.	10	5m2						20-35L
HEDGE								
Buxus sempervirens	35	5m2	60-80cm					5L
CLIMBER								20-35L
Hedera helix 'Gold Ripple'	Sī	5m2						20-35L
Clematis montana var 'Grandiflora'	5	5m2						20-35L

3 x Hedera helix 'Gold Ripple'-5 x Tilia cordata (pleached)


10 x Salvia officinalis

2 x Hedera helix 'Gold Ripple'

All trees & shrubs to be supplied and installed under current best practice; i.e. conforming to and planted in accordance with the following:

5m

- BS 3936:1980 Nursery Stock,
- BS 4043:1966 Transplanting Semi-Mature Trees, and
- BS 5236:1975 Cultivation and Planting of Trees in the Advanced Nursery Stock Category
- · All replacement stock should be planted and maintained as detailed in BS 4428:1989 (Section 7): Recommendations for General Landscape
- All trees or shrubs dieing within 5 years of the completion of development must be replaced within the next growing season.





Landmark Environment

20 Broadwick Street, London, WIF 8HT
Tel: 0207 851 4544 Mobile: 07812 989928
e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk

Drawing Title: Landscape Plan Site: Doughty Street REV A 1:200 @ A3 Nov 2013