


Typical Manifold Details

Not to scale

Catchpit Manhole

Type H Manhole

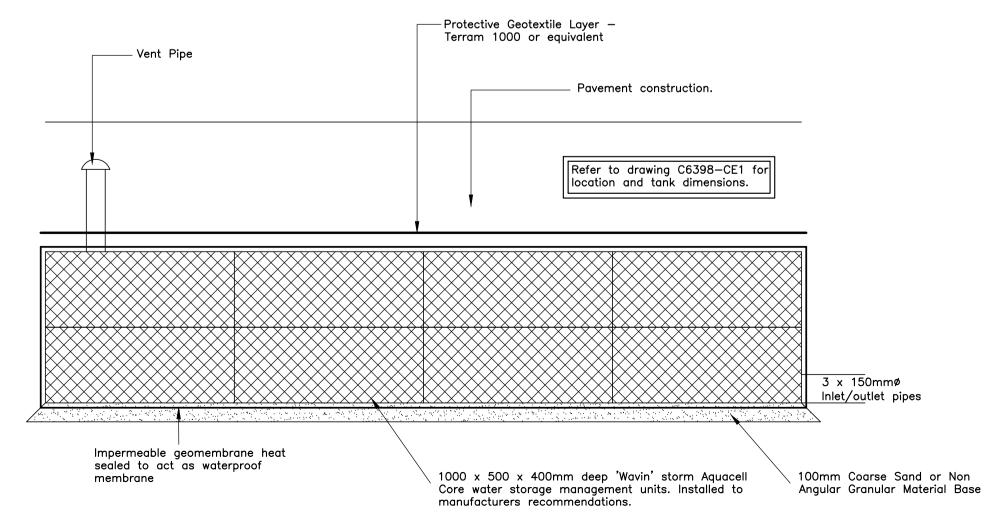

Control Chamber S2 — Section

Typical Storage Tank Details

Balloon Grating Ventilation Box (4D706) Imported granular backfill Dot 250 thk ST4 Concrete Type 1 compacted in 150mm layers beneath road/parking/ 110mmø Pipe footpath areas only. Selected type B in soft areas 150mmx110mm Reducer (6UR099) Flange Connector Geomembrane sealed (6LB104) to Flange 

Notes:

150mm Ultrarib pipe

150mm Ultrarib pipe

150mm Ultrarib pipe

- 1. This drawing shall be read in conjunction with all relevant engineers drawings. Any discrepancies found between information shown on this or any other drawing shall be Reported to the Walkers Associates engineer immediately and prior to works commencing on site.
- 2. Type A granular bedding shall consist of 14mm single sized pea shingle to TABLE 1 of BS 882 part
- 3. Selected fill type B shall consist of uniform readily compactable material free from tree roots, vegetable matter, building rubbish and frozen soil and excluding clay lumps retained on a 75mm sieve and stones larger than the maximum size permitted on any adjacent type a bedding material.
- 4. Where concrete bed and surround is specified joint filler should be provided AT every joint. The filler may be expanded polystyrene 25mm thick or flexcell cut to the shape of the bed and surrounded and such that the ingress of concrete into the pipe is prevented.
- 5. To allow for possible differential movement a flexible joint must be incorporated in each section of pipeline within 150mm of where it enters a building or connects with a manhole, wall or other structure:- see manufacturers instructions
- 6. All pipework generally to be bedded as follows
- (i) Under vehicular areas where cover is less than concrete bed and surround. 900mm under pedestrian areas where cover is less than 600mm
- (ii) Under vehicular areas, pedestrian areas where class S bedding. depths given in (i) are
- 7. All private pipework shall be either vitrified clay,concrete or UPVC to BS 65, 5911 and BS EN 1401 respectively
- 8. All concrete at or below ground level on site shall be able to withstand class 2 sulphate concentrations in accordance with BRE digest 363
- 9. SVPs that have fallen vertically for more than 3 storeys should have a 750mm distance between invert of last connection and invert of the bend.



FOR TENDER

PLENDER STREET LONDON



TYPICAL DRAINAGE CONSTRUCTION DETAILS (2 OF 2)

DRAWN BY DMB DATE 14.02.14 SCALES (@A1)- AS SHOWN CHECKED BY LRW

Cranes Farm Road

Essex SS14 3JJ

Web www.walker-associates.co.uk

Tel 01268 530 500 Fax 01268 28 66 28

