


Leaf guards: Harmer Aluminium Two-way Rainwater outlet with grating to restrict entry of solids to system.

The Regular Two-Way is designed for use in many applications, the sump is compact yet provides adequate drainage for most parapet applications, it has three outlet options in 2", 3", and 4" BSP thread.

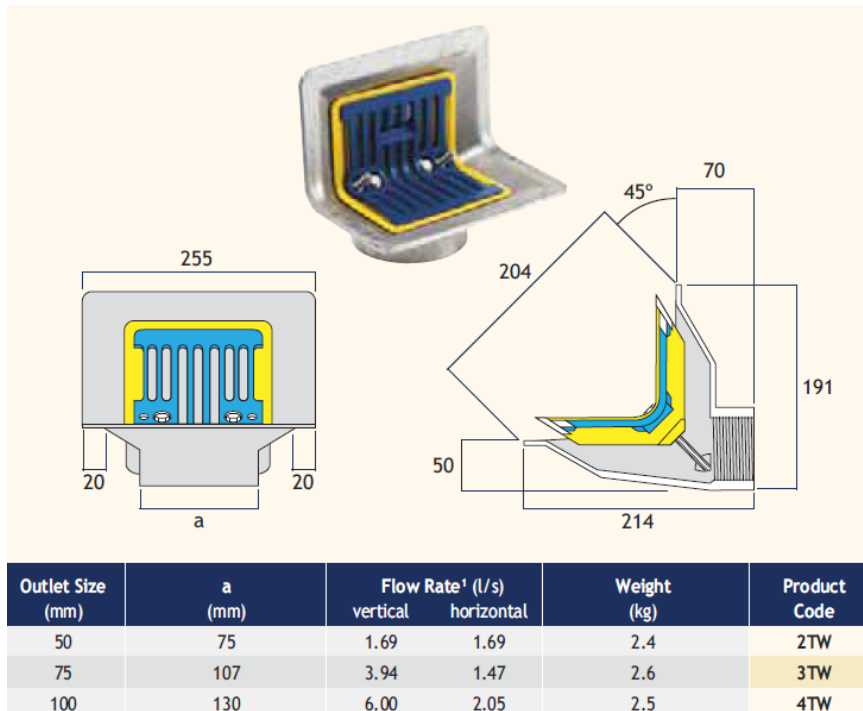

Leaf guards are fitted to all gutters.

Informative note:

The rainwater and foul drainage above ground installation shall satisfy but not be limited to the following statutory regulations, British Standards, Regulations and Codes of Practice, including all amendments:

- The Institute of Plumbing - Plumbing Engineering Services Design Guide.
- CIBSE Public Health Engineering Guide G
- BS 7671, IEE Wiring Regulations.
- The British Standard BS 6367.
- The British Standards BS EN 12056 - 1 to 5 Gravity drainage systems inside buildings.
- The Building Regulations Approved Documents.
- The Local Authority Requirements.
- Water Supply (Water Fittings) Regulations
- The Construction, Design and Management Regulations
- BS:8515 Rain Water Harvesting Systems – Code of Practice