

New Fire Rated Elements and Fire Signage

New structural elements - to be 60minute fire resistant

Fire rated secondary glazing fitted inside existing historic window

New fire door to be installed

Fire alarm call point

Existing fire compartment - 30min fire rated

30mins fire rated window 30FR FD30S

with smoke seals

FIRE EXIT

Fire Exit Signage (Straight on and down from here) - FED

Fire Exit Signage (Down and right from here) - FEDR

NOTES:

For more information of the buildings fire alarm system, emergency lighting and illumination of exit signs refer to Services Engineer's drawings and specifications.

Fire Signage to conform to BS 5499.

The emergency exit signage layout here reflects the design intent. Final locations of exit signs to be confirmed and agreed on site with the Approved Inspector.

Fire Compartmentation/Protection is required to all escape routes. An indication of the fire compartmentation of existing walls has been shown. Any new service penetrations to existing wall should be provided with suitable fire stop.

All new structural elements and floors to be to a 60 minute fire resistance. Non structural elements to be 30 minute fire resistant. Category LD1 Fire System to be provided throughout

FIRE EXTINGUISHER PROVISION:

1 x 21A rated water (with additive)

1 x 34B CO2 at each fire alarm break glass call point

1 x Light duty fire blanket at each pantry/kitchen

Final Exit

Retained existing fire door - not upgraded

Existing fire door to be upgraded

Refuge area 900x1400mm

New fire compartment - 30min fire rating 30mins integrity & insulated fire rated door

Fire Exit Signage (Final Exit) - FEA

Fire Exit Signage (Straight on from here)

Fire Exit Signage (Left from here) - FEL

Fire Exit Signage (Right from here) - FER

99 - Whole Building S - Site (ii) DRAWING TYPE / NUMBER 00(XX) - Site Drawings (drawing no.)

DRAWING TITLE KEY

(i) BUILDING LEVEL

00 - Ground Level 01 - First Floor 02 - Second Floor 03 - Third Floor 04 - Roof Level 98 - Basement Level

(ii) (iii)

LEGEND:

AH Arch Height ASH Arch Spring Height BH Beam Height BL Beam Level CAH Ceiling Arch Height CH Ceiling Height CL Ceiling Level CPD Cupboard

CSH Ceiling Spring Height DH Door Height DOH Door Opening Height

ESG Electrical Switch Gear F-H Floor - Head Height F-S Floor - Sill Height FBH False Beam Height FCH False Ceiling Height FL Floor Level G Gully GL Ground Level High HB Hand Basin HL Head Level HWT Hot Water Tank IC Inspection Cover RAD Radiator RL Roof Level RWP Rainwater Pipe S-AH Sill - Arch Height S-H Sill - Head Height S-SH Sill - Spring Height SL Sill Level SVP Soil Vent Pipe VP Vent Pipe

WAD Window Above Door WAW Window Above Window

Floor Level Steps Up ---- Ceiling Level Slopes Up

The accuracy of this survey drawing is dependent upon the scale at which it is produced. Users should

not re-scale this drawing without consent.

All level values refer to the following OSBM:-

South East Face, No.11 Bedford Square; Value

WC Water Closet WS Work Surface

NOTES:

BUILDING KEY

DP Downpipe

10(XX) - Existing Plan Drawings (drawing no.) 11(XX) - Demolition Plan Drawings (drawing no.) 12(XX) - Proposed Plan Drawings (drawing no.) 13(XX) - Reflected Ceiling Plans (drawing no.) 15(XX) - Floor Finishes Drawings (drawing no.)

BEDFORD SQUARE - 00 - 1002 - A

16(XX) - Fire Strategy Drawings (drawing no.) 20(XX) - Elevation Drawings (drawing no.) 30(XX) - Section Drawings (drawing no.) 40(XX) - External Detail (drawing no.) 50(XX) - Internal Detail (drawing no.)


(iii) DRAWING REVISION


W.B.01 - Window number $\langle R.B.01 \rangle$ - Room number


D.B.01 - Door number

F.B.01 - Fireplace number







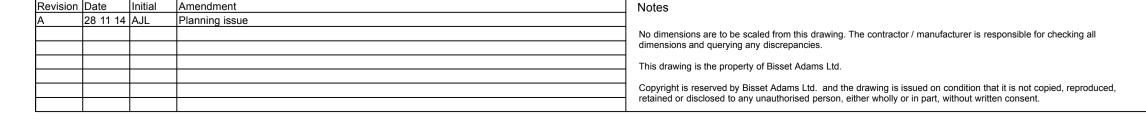





1:50 Status Planning



