




ecolux II

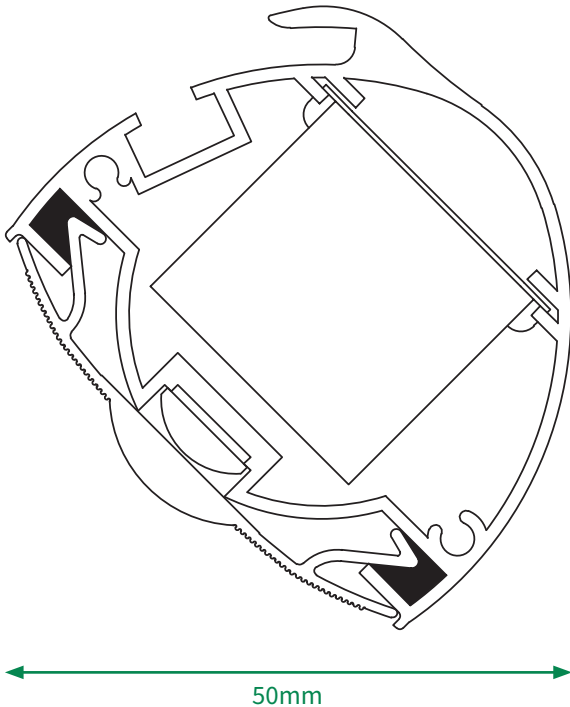

options

- Cold or Warm White LED colour.
- Non-standard brackets available upon request.
- Standard and non-standard colours.
- Photo electrical cell switches.

technical specification

LED strip

- Latest high lighting chip technology giving 70 lumens per watt output.
- Over 1000 Lumens per metre LED output.
- Only 14.4 watts per metre power consumption
- 75% energy saving compared to Fluorescent.
- 24 volt input, less current less voltage drop.
- 6000k cool white or 3000k warm white 120 degree angle.
- IP65 protected, 50,000 hours+ lamp life.
- 2 year Warranty.
- Full CE certification and ROHS compliant.

Drivers

- Epoxy encapsulated fully isolated case with IP67 protection.
- Constant voltage design.
- Short circuit, over current, over voltage protection.
- Fitted onto Kwik release slide in Gear Trays.
- Full CE certification and ROHS compliant.

Light Fitting

- Specially designed 50mm diameter aluminium extrusion supplied up to 6000mm lengths which can be joined together using cast aluminium connectors.
- Die cast aluminium end caps.
- Standard 300mm Kwik Fit brackets.
- Snap-in polycarbonate 90 degree magnifying lens diffuser.
- Casing sealed and certificated to IP64.
- Full CE certificate and 2 year parts warranty.
- Conforms to BS 4533: SECTION 102.1:1990 / EN60598-2-1:1989 and BS EN60598-2-6:1995 with BS EN 60598-1:2008 "UK Deviations Only"

(The manufacturer's reserve the right to alter specifications without prior notification.)

Price will include: Polyester powder coated black or white and 300mm universal brackets.

Telephone: **01922 721 133**
Facsimile: **01922 659 545**



Portland Lighting
Units A2 & A3
Walsall Enterprise Park
Regal Drive
Walsall
WS2 9HQ