



PLY PARTESSES
 1 - 750 TO 1950mm AFFL
 2 - FFL TO 2450mm AFFL
 PARTESSES HEIGHT / SIZE TO BE CONFIRMED ON SITE

Safety first. Second nature.
 Safety, Health and Environment Information
 The significant unusual hazards / risks associated with this type of work are noted as:
 CONSTRUCTION
 OPERATION AND MAINTENANCE
 DISMANTLING/DEMOLITION

NOTE - TO BE READ IN CONJUNCTION WITH RISK REGISTER


LEGEND

1	K10125A GYPWALL CLASSIC (BG type A206186) 60MIN FIRE RATED - 100MM OVERALL. REF DWG 701
2	K10125B GYPWALL CLASSIC (BG type A206003) 60MIN FIRE RATED - 100MM OVERALL. REF DWG 702
3	K10145A SHAFTWALL (A306030b) 120MIN FIRE RATED - NOMINAL 107MM OVERALL. REF DWG 703
4	K10155A GYPWALL UNIVERSAL (BG type B226008A) - NOMINAL 60MM OVERALL. REF DWG 704
5	K10125C GYPWALL CLASSIC (BG type A206142) 60MIN FIRE RATED - NOMINAL 122MM OVERALL. REF DWG 705
6	L20545A ACOUSTIC OPERABLE WALL-SEE DRG SOAS-A-DET-GEN-ZZ-756
7	K30130A DOUBLE GLAZED PARTITIONS & DOUBLE GLAZED FLUSH DOORS
8	K30130C SINGLE GLAZED PARTITIONS WITH SLIDING DOORS
9	K10155B GYPWALL IWL (BG type B226003A) 30MIN FIRE RATED - NOMINAL 95MM OVERALL
10	K10155A GYPWALL IWL (BG type B226003A) 30MIN FIRE RATED - NOMINAL 95MM OVERALL
13	K30130A SOLID PANEL
14	F10355B 100MM CONCRETE BLOCKWORK TO LOWER GROUND TOILETS AND INFILL OF INTERNAL OPENINGS UP TO 2.3M
15	F10356A 140 MM CONCRETE BLOCKWORK FOR OPENINGS ABOVE 2.3M HIGH
16	F10355B 75MM CONCRETE BLOCKWORK WHERE REQUIRED
17	F10355C CONCRETE BLOCKWORK
18	L20490 FULL HEIGHT GLAZED CURTAIN WALLING SCREEN
19	K10125E GYPWALL CLASSIC (BG type A206015) 60MIN FIRE RATED - NOMINAL 152MM OVERALL
20	K10125D GYPWALL CLASSIC (BG type A206079) 120MIN FIRE RATED - NOMINAL 122MM OVERALL

3	19.12.14	DOOR CHANGES SINCE CONTRACT ISSUE T2 AND NOTES ADDED AS HIGHLIGHTED REGARDING EXISTING SKIRTING ETC. IBC SUBMISSION IN ABEYANCE NOTES ADDED. LIFT SHAFT UPDATED	JU	EF/MD
2	14.11.14	LEVELS UPDATED/ LOUVRES & GRILLES REFERENCES ADDED/ WALL TYPE LEGEND SHORTENED & FIRE RATINGS ADDED. SOME WALL AND SKIRTING TYPES CHANGED. PARTITIONS ACOUSTIC & FIRE REQUIREMENTS NOTE ADDED. FIRE & ACOUSTIC BARRIER NOTE ADDED.	GM	LT/MD
1	03.10.14	CONSTRUCTION ISSUE: PARTITIONS UPDATED. SKIRTINGS AND DETAIL REFS SHOWN	DL	LT/GM

REV. DATE DESCRIPTION

KEY PLAN

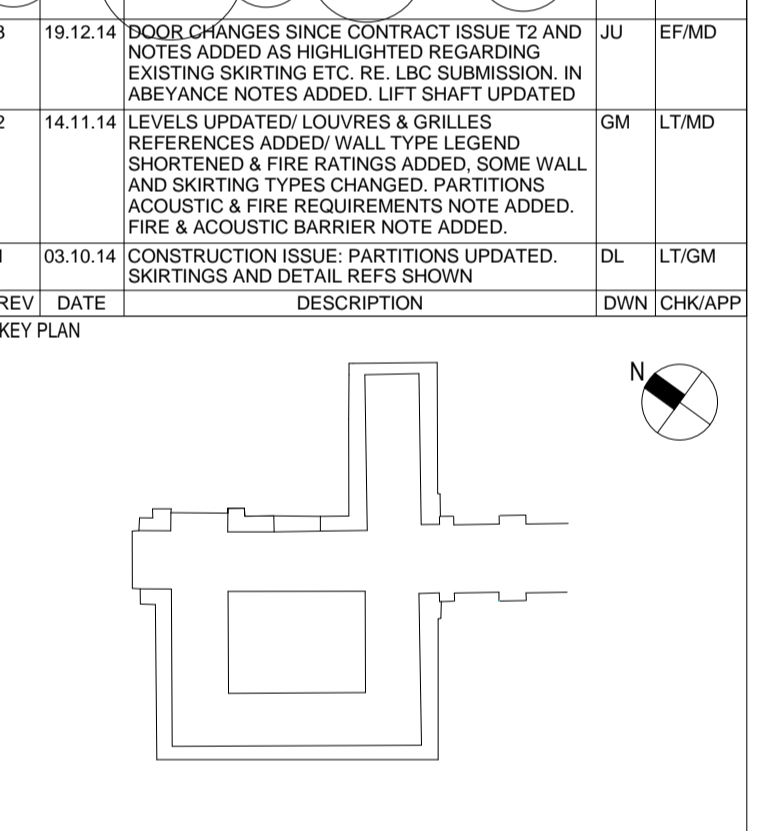

PROJECT STATUS: CONSTRUCTION

CLIENT: GRAHAM CONSTRUCTION

mace
 155 Moorgate, London, EC2M 6XB
 www.macegroup.com

PROJECT TITLE: SOAS INTO SENATE HOUSE MALET STREET LONDON, WC1E 7HU

DRAWING TITLE: LEVEL 1 DOOR/WINDOW/PARTITION KEY PLAN

PROJECT NO.	28731	DRAWN BY	DC	DATE	25/07/13
CHECK BY	LT	DATE	25/07/13		
APP'D BY	-	DATE	25/07/13		
PROJECT CODE	DISC	VIEW TYPE	VIEW CAT	LEVEL	DWG NO.
SOAS - A - PLN - GEN - 01 - 293					
SHEET NO.	1 of 1	SCALE	As indicated	ORIG. SHEET SIZE	REV.
			@ A1	C	3

INFORMATION HANDLING CLASSIFICATION: UNRESTRICTED

- EXISTING SKIRTING TREATMENT LEGEND:**
- EXISTING TIMBER/PLASTER SKIRTING UNAFFECTED. NEW PARTITION/SCREEN SCRIBED AROUND.
 - EXISTING TIMBER/PLASTER SKIRTING CUT AT NEW PARTITION/SCREEN.
 - EXISTING TERRAZZO SKIRTING. UNAFFECTED. NEW PARTITION/SCREEN SCRIBED AROUND.
 - EXISTING SKIRTING & DADO UNAFFECTED. NEW PARTITION/SCREEN SCRIBED AROUND.

CHANGES BETWEEN T2 AND C3:
 1 - NEW DOOR 120MIN FR ADD TO LOCATION: 1.61A, 1.54A. 2 - NEW DOOR 120MIN FR CHANGE LOCATION AND SIZE, IN LOCATION: 1.12A.
 3 - 120MIN FR DOOR CHANGE FROM SINGLE LEAF TO DOUBLE IN LOCATION: 1.59A.

REFER TO 'SOAS-A-DET-GEN-XX-755' (PROPOSED DRY LINING DETAILS) FOR DETAILS OF FIRE AND ACOUSTIC BARRIERS BELOW SUSPENDED FLOORS AND BELOW HOLLOW POT SOFFITS.

THE ACOUSTIC AND FIRE RATING REQUIREMENT OF THE PARTITIONS MAY BE LESS THAN WHAT IS STATED IN THE SPECIFICATION, DEPENDING ON SPECIFIC LOCATION