


	Intruder	Access Control	CCTV	Fire	General
Panic Buttons	●				

Overview

The Elmdene range of panic buttons has been ergonomically designed and are ideal for use in commercial and domestic installations. All units are double push with integral resistors for use with most control panels or option for double pole. Spare terminals allow through connection for multiple units wired to one zone.

Features

- Silent operation
- Grade 3
- Environmental class II
- FSL and D/P connection
- Multiple control panel and resistor options
- Easy connection of multiple units
- Cover and rear tamper
- Anti-lock reset mechanism
- Independent micro switch tamper
- Integral storage for reset key
- Selectable normally closed or open contacts
- 5 year warranty

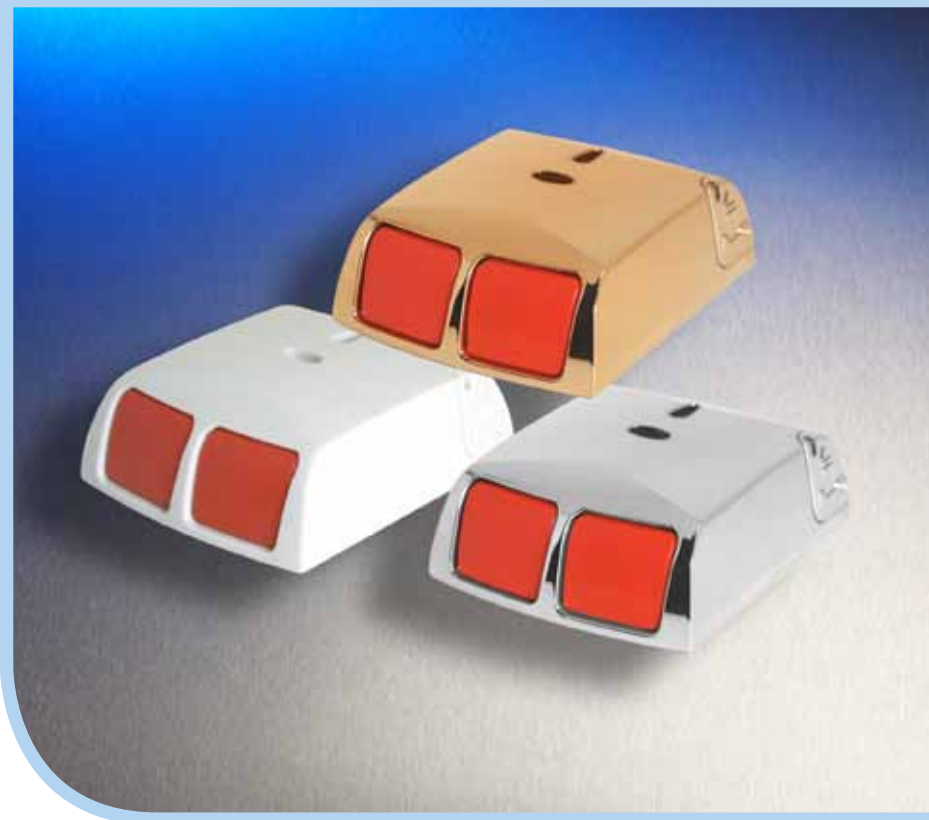

Description

Part Number	Colour	Dimensions
ELM-PA-G3-W	White	80 L x 62 W x 27 D
ELM-PA-G3-B	Brass (plated finish)	
ELM-PA-G3-SS	Stainless steel (plated finish)	

Approvals & Certification

The units comply fully with 'The ACPO 10 Point Plan' and all requirements under EN50131-1:2006 and PD6662:2010.