


A: Existing situation

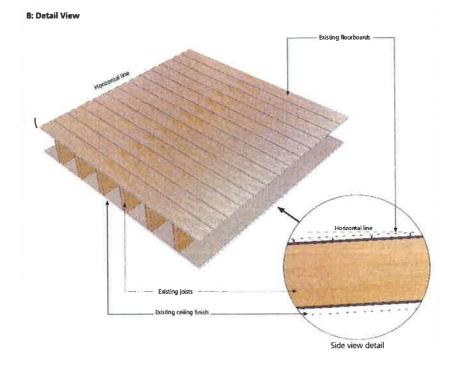


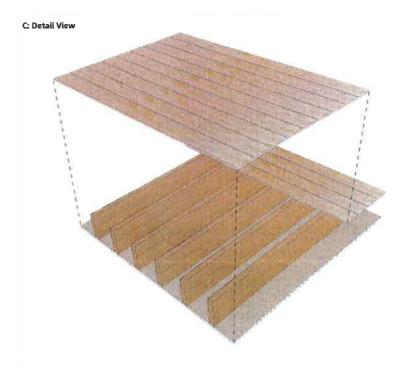


1. Remove existing floorboards and carefully set aside

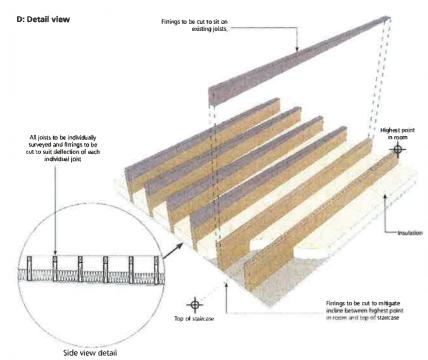

- 2. Level of highest point in room and top of staircase to be established. Firrings to be cut to mitigate incline between highest point in room and top of staircase
- 3. Firrings to be fixed to existing joists.
- 4. Fill voids between joists with insulation

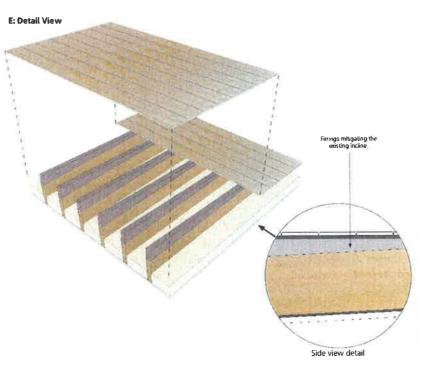

5. Replace existing floorboards

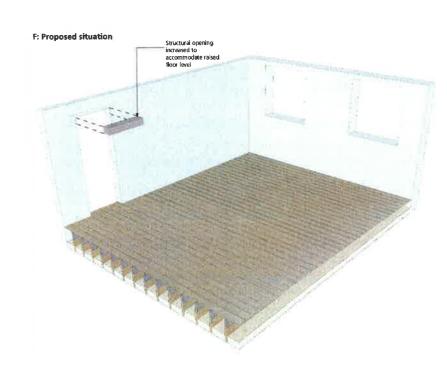

6. Increase structural opening of doors where necessary to make up for rise in floor levels

08.03.2013 Issued for planning

University College London 3+ Taxistock Square, London, WCTH 9EZ Proposed Floor Levelling Process Diagram

Status PLANNING Date NOV 2012 Drawn GN Project N° Drawing N°

479/A(43)/300

burwell deakins : architects

t 0208305-60-0 f 0208305-6020 e -alofgeo-weekerchiediscom www.outweekerchiediscom a -and-001-caldon-ia-oulding deals gatteway ondon-5t-(3-/5f-