


TIMBER LINTEL TO
RESTRAIN DOOR
(BY OTHERS)

FIXINGS TAGS TO
INSIDE (IF REQUIRED)

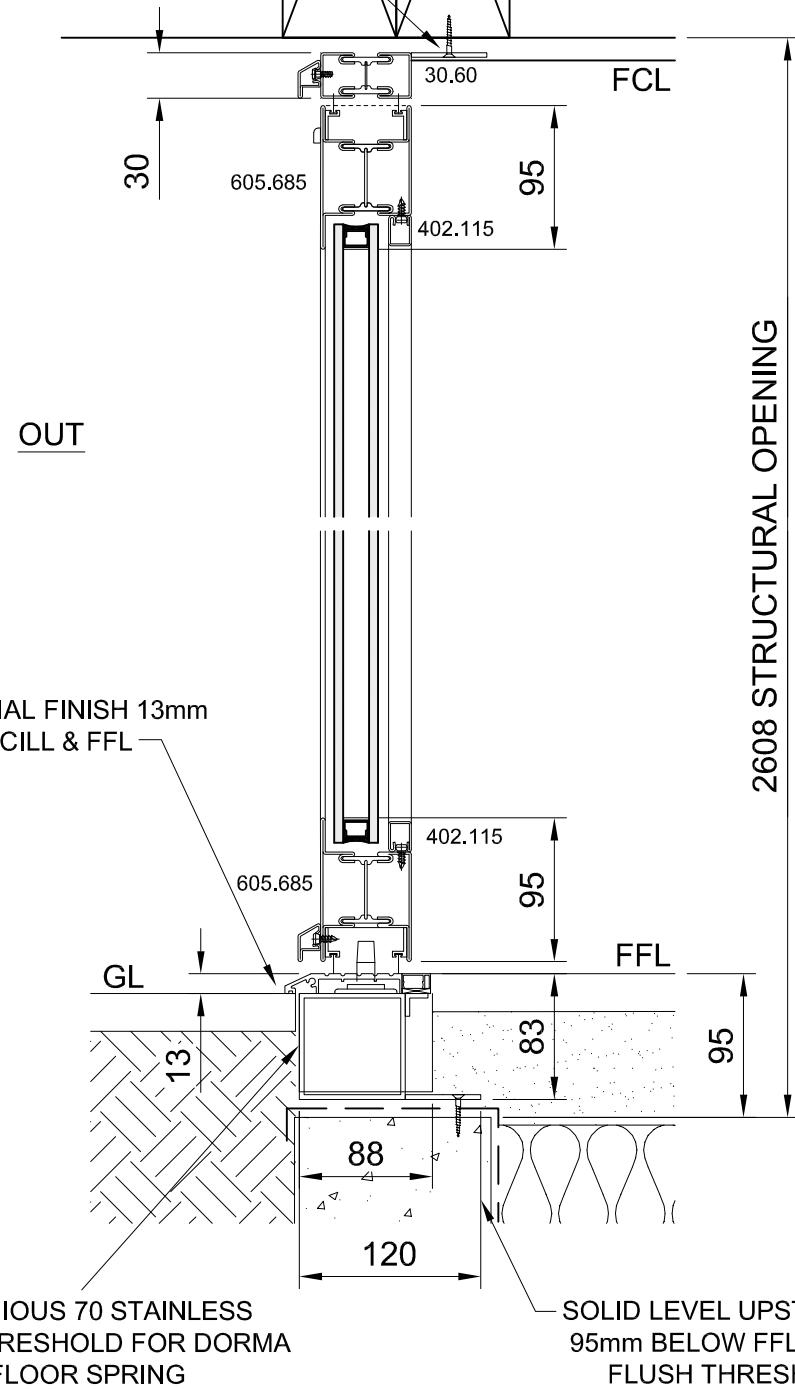

NOTE: WORKING TO **AGREED SIZES**
CONTRACTOR RESPONSIBLE FOR STRUCTURAL OPENING
(NOT SURVEYED BY CULMAX)
APPROVED BY.....DATE.....

THERMALLY BROKEN MILD STEEL PIVOT DOOR POLYESTER
POWDER COATED RAL COLOUR (TBC)
(OUTWARDS OPENING)

GLASS SPECIFICATION: 6mm CLEAR TOUGHENED (OUTER) /
16mm ARGON CAVITY w/ BLACK SPACER/ 6mm CLEAR
TOUGHENED LOW E (INNER)

LOCKING: 2no ISEO DEADLOCKS WITH ROLLER LATCH
-PRIMARY LOCKING WITH DOUBLE CYLINDER AT HANDLE
- SECONDARY LOCK WITH SINGLE THUMBTURN CYLINDER
AT EYE LEVEL

