


## TECHNICAL DATA SHEET

### Xero Flor sedum blanket system – Construction and Saturated loading Insulated with roof fall of 1°-2°

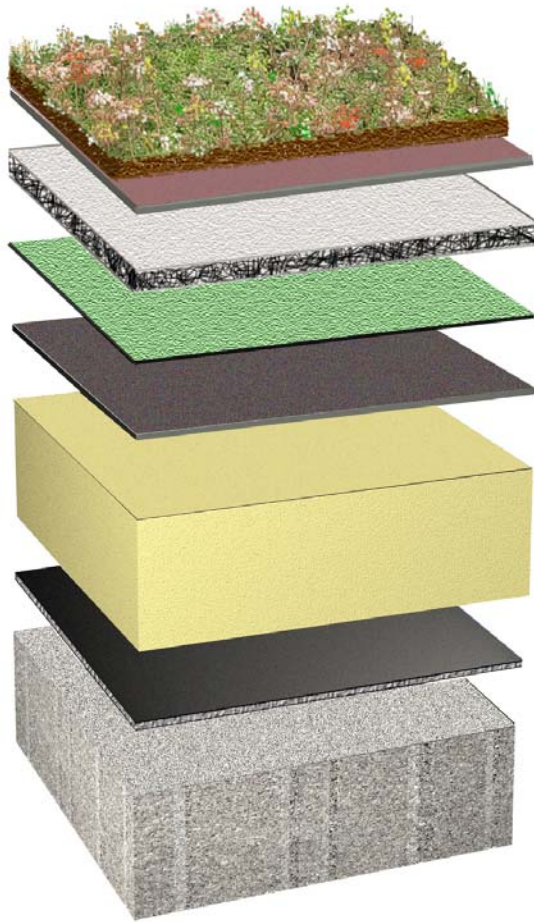

- \_\_\_\_\_ **Bauder XeroFlor XF301  
Sedum combination blanket**
- \_\_\_\_\_ **Bauder SDF mat**
- \_\_\_\_\_ **Bauder Plant-E capping sheet**
- \_\_\_\_\_ **Bauder G4E**
- \_\_\_\_\_ **Bauder PIR insulation**
- \_\_\_\_\_ **Bauder VB4-Expal vapour barrier**

Specification Build-up	Thickness/mm	Weight kgs/m <sup>2</sup>
<b>Vapour barrier – VB4-Expal</b>	<b>4</b>	<b>4.5</b>
<b>Insulation</b>	<b>110</b>	<b>4.18</b>
<b>G4E Underlayer</b>	<b>4</b>	<b>4.8</b>
<b>Plant-E capping sheet</b>	<b>5</b>	<b>6.0</b>
<b>SDF Mat</b>	<b>20</b>	<b>0.6</b>
<b>XF301 sedum blanket</b>	<b>33</b>	<b>43.8</b>
<b>System build-up</b>	<b>176</b>	
<b>Overall saturated weight in kgs/m<sup>2</sup></b>		<b>63.88</b>

#### Bauder Limited

Broughton House, Broughton Road, Ipswich, Suffolk IP1 3QR, England  
 T: +44 (0) 1473 257671 F: +44 (0) 1473 230761 E: technical@bauder.co.uk  
[bauder.co.uk](http://bauder.co.uk)