



--

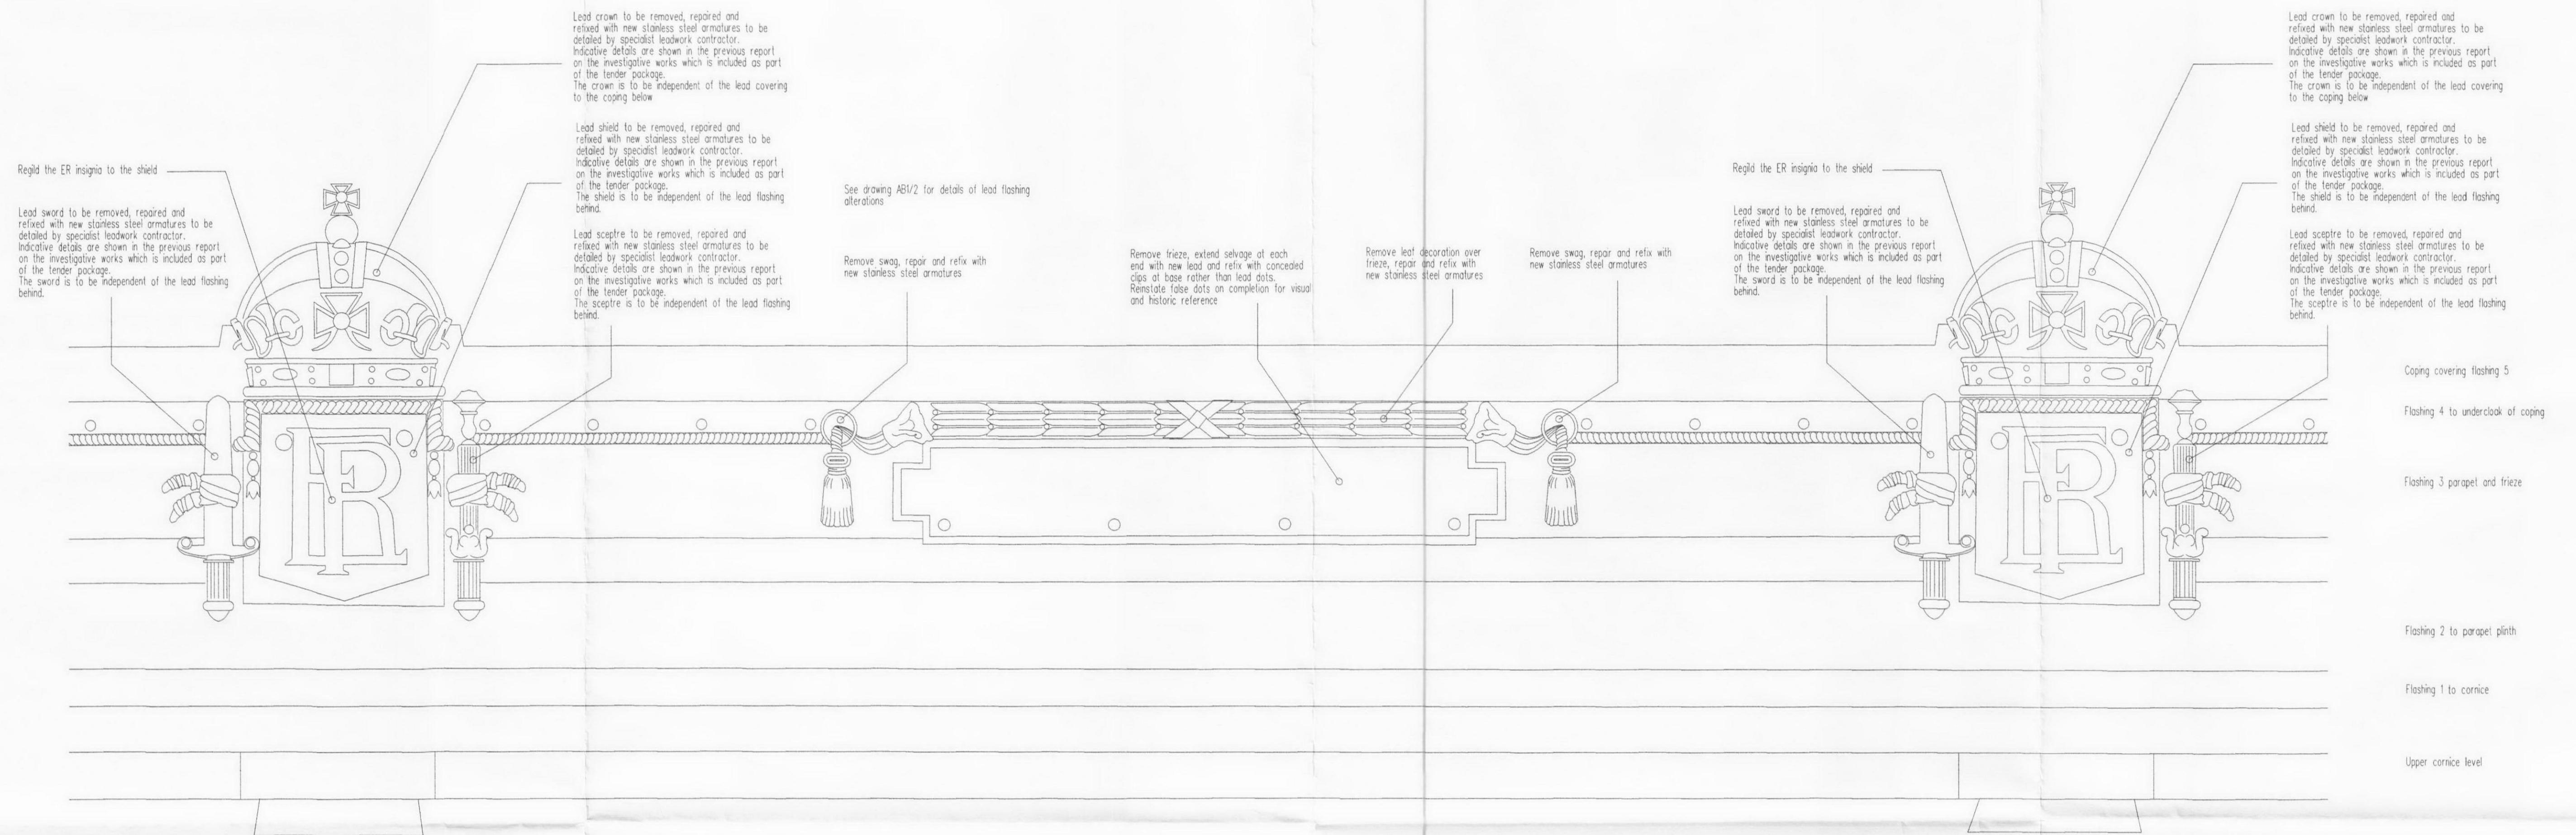

PART ELEVATION (note that the repairs indicated apply to all panels except 1 and 2)

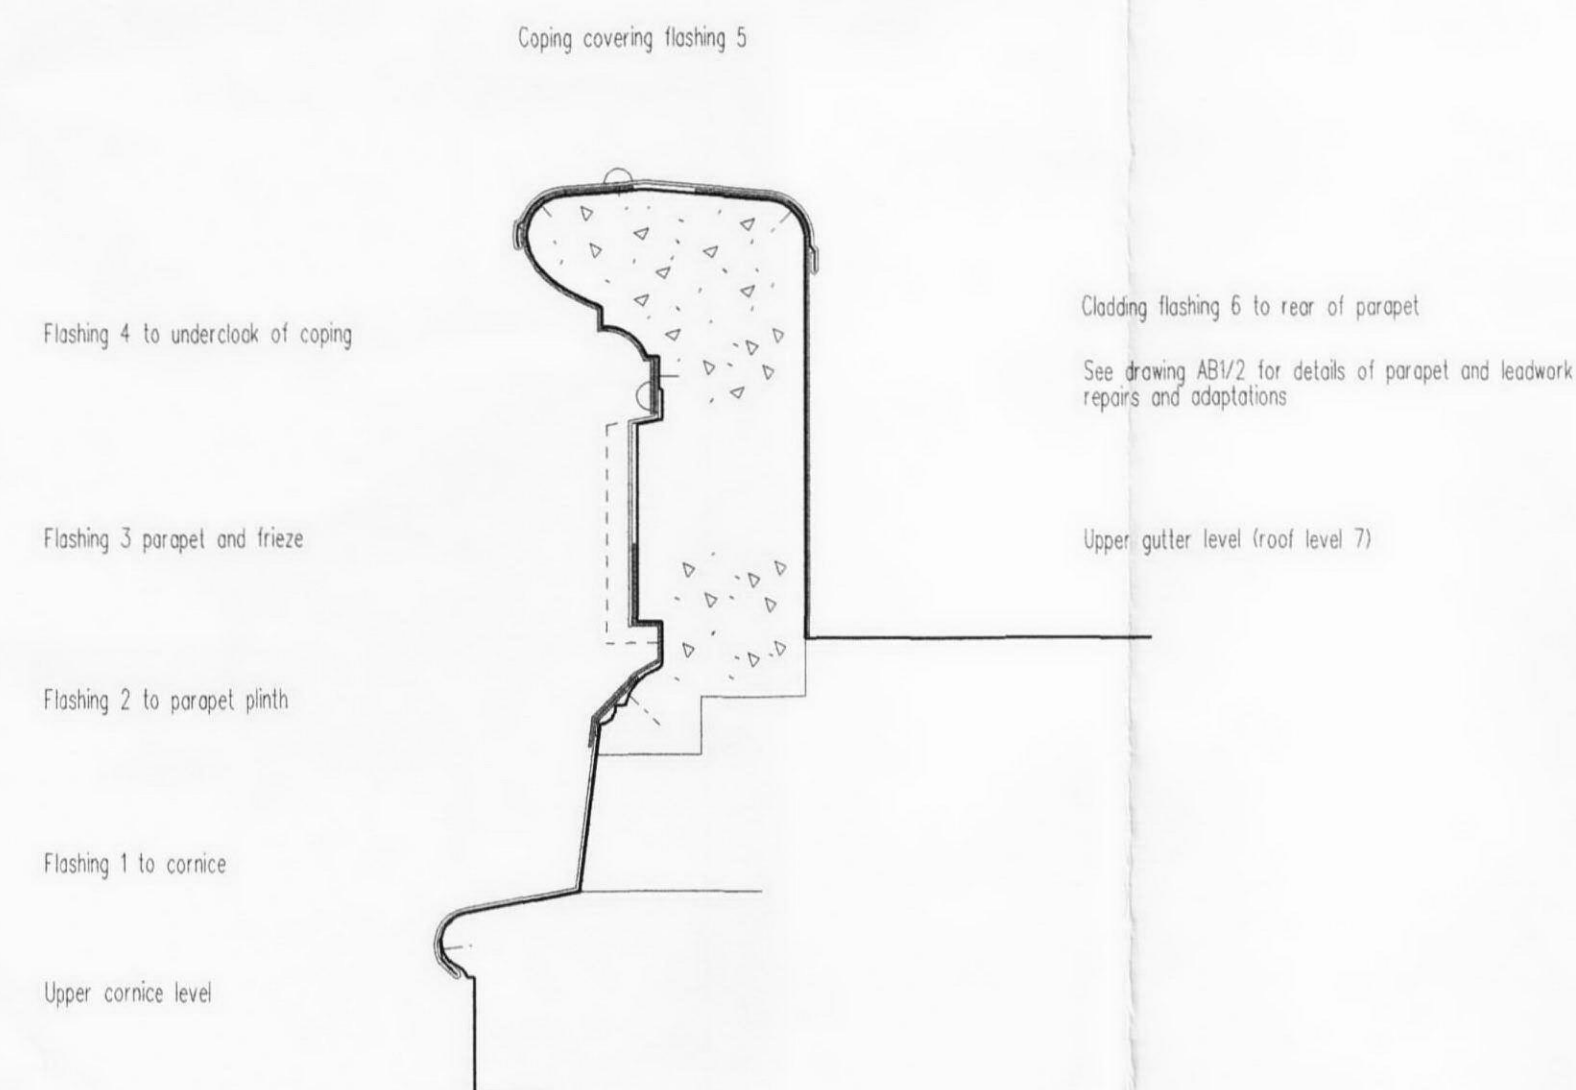

NOTE:

Repairs to leadwork, stonework, brickwork and minor associated elements from the lower gutter level up to the coping level are detailed in the particular specification with preliminary quantities in the Bills of Quantities. The level of defects and final repairs are to be agreed once scaffold access is available, and reviewed against the allowances made.

All armature details are to be prepared by the specialist lead working contractor for review and comment by the design team. The Specialist contractor will be responsible for the design of these components including the preparation of detail drawings and calculations where necessary. The previous reports prepared before and after the sample repairs to Bay 1 and shields / crowns 1 and 2 at the east end indicate typical armature details. No lesser standard will be acceptable.

AMENDMENTS

THE BRITISH MUSEUM
KEB PARAPET REPAIRS

KING EDWARD VII BUILDING
TYPICAL PARAPET ELEVATIONS
BAY 3 AND SHIELDS 2 AND 3
SHOWN

scale A1: 1:10 A3: 1:20	date DECEMBER 2011
-------------------------------	-----------------------

job no.
11-127

drawing no.
AB 1/3

client

THE TRUSTEES OF
THE BRITISH MUSEUM

FRANK TIMOTHY ASSOCIATES LIMITED
Chartered Architectural Technologist

Oakfields, 18 Piper Road, Yate
South Gloucestershire BS37 5SY

Telephone 01454 880395 Fax 01454 880396