



# Stormloc IP65 LED Non-Corrosive

Supplied c/w Integral Driver


- Up to 48% energy saving compared to T8 fluorescent
- Light output exceeds performance of T8 and T5 fluorescent by up to 37%
- LED performance allows point for point replacement of existing fluorescent luminaires
- Internal linear Visiluxe optical lens for maximum performance and light distribution. Provides appearance of traditional fluorescent
- Instant light output with unlimited switching
- Unique luminaire fixing clip design allows option of mounting onto BESA box or directly onto ceiling surfaces
- Lockable heavy duty stainless steel clips supplied as standard for added safety and security
- Polycarbonate base and diffuser maximises durability and strength
- Self-test emergency as standard
- CorridorFUNCTION for dimmable microwave sensor models



Internal high performance optical lens



Powered by  
**TRIDONIC**  
enlightening your ideas

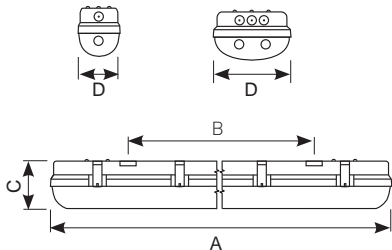

### LED Information

Total (Watts)	26W	52W
	36W	72W
	42W	84W
Lumens Delivered	2800lm	5600lm
	3800lm	7600lm
	4200lm	8400lm
Lm/W	82lm	79lm
	85lm	73lm
	74lm	75lm
CRI	Ra 80	
CCT	4000K	
Input	240V	

Code	Lamp	Description	A	B	C	D
ASLED4	LED	1 x 26W	1265	907	110	105
ASLED5	LED	1 x 36W	1565	907	110	105
ASLED6	LED	1 x 42W	1858	1170	110	105
ASLED2X4	LED	2 x 26W	1265	907	110	165
ASLED2X5	LED	2 x 36W	1565	907	110	165
ASLED2X6	LED	2 x 42W	1858	1170	110	165

Options	Code	Description
	/M3	Self Test Emergency
	/MWS	Integral Microwave Sensor
	/DD	LED Dimmable
	/DD/M3	LED Dimmable Self Test Emergency
	/DD/MWS	LED Dimmable Integral Microwave Sensor
	/DD/MWS/M3	LED Dimmable Integral Microwave Sensor Self Test Emergency

