


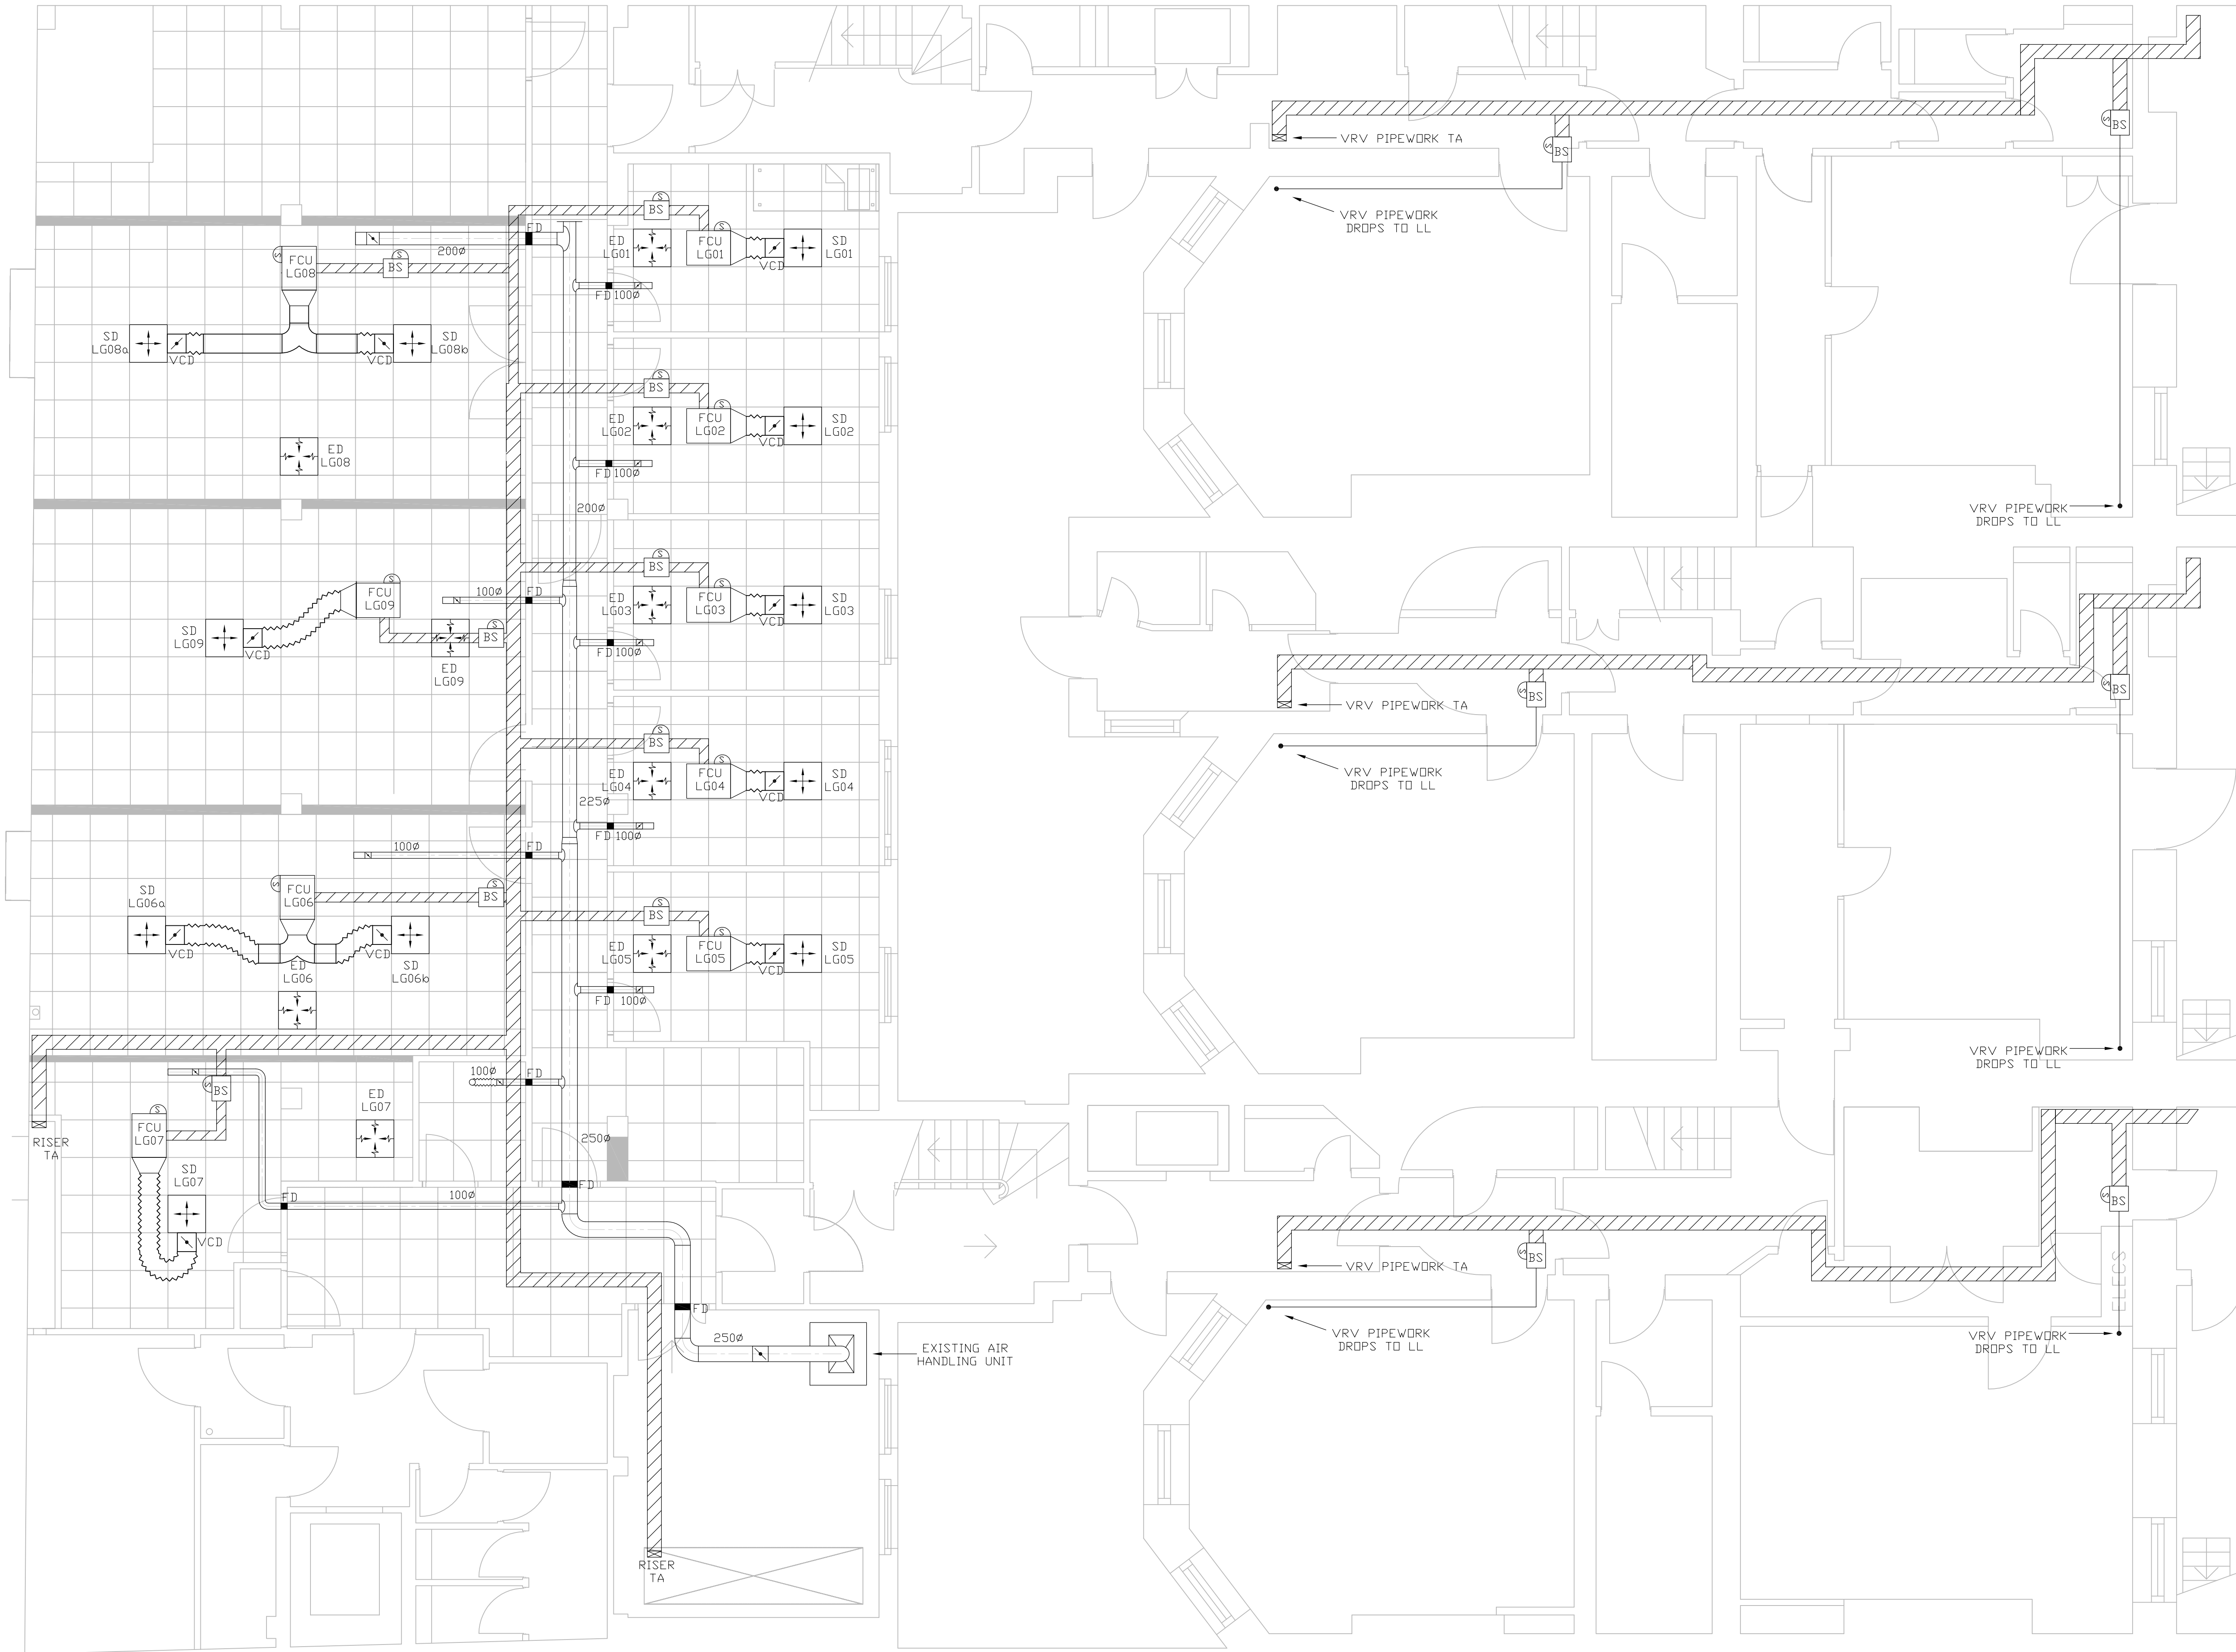

DRAWING STATUS

FOR COMMENT

DO NOT SCALE FROM DRAWING

NOTES

See equipment schedules for heating/cooling loads and equipment details.


All secondary supply ductwork, including plenum boxes are to be thermally insulated.

Condense pipework is to connect to local soil stack/pipe.


Positions of room controllers TBC

All supply ductwork to be thermally insulated. See M001 for supply air schematic

LEGEND



EXTRACT GRILLE



SUPPLY GRILLE



FRIDGE PIPE TRAY



TRAY RISER FB/TA



BRANCH SELECTOR BOX



VRV CONTROL



SWITCHED FUSED SPUR



FIRE DAMPER C/W ACCESS DOOR



VOLUME CONTROL DAMPER



REFRIGERANT PIPE

D	Supply ductwork extended as DHP comments	11.03.11
C	Terraces VRV System added	04.03.11
B	AHU & extract duct added	25.02.11
A	DHP comments incorporated	16.02.11
REV	DESCRIPTION	DATE

Building Services (Beds) Limited

M & E Contractors
Unit 15 Riboon Way
Progress Park
Luton LU4 9UR
Tel: 01582 565544 Fax: 01582 565566
www.buildingservicesbeds.co.uk



PROPERTY CONSULTANTS

243 Brooklands Road
Weybridge
Surrey KT13 0RH
Tel: 01932 850100
Fax: 01932 841800

Email: business@dhpuk.co.uk
Web: www.dhpuk.co.uk

PROJECT NAME
**Bloomsbury Publishing
49-51 Bedford Square
London
WC1B 3DP**

DRAWING TITLE
**LOWER GROUND FLOOR
HIGH LEVEL
MECHANICAL SERVICES
LAYOUT**

SCALE 1:50@A1	DRAWN BY NB CHECKED BY SW	DATE 11.02.11 DATE 11.02.11
-------------------------	--	--

PROJECT **11002**

DWG No **M101** REV No **D**