


New 150mm square x 10mm thick stainless steel plate with threaded hole.

8mm dia "Sockfix" grouted sock anchors in 20mm dia diamond drilled holes.

8mm dia threaded rod cut flush with surface of plate.

Gap between uneven wall surface and plate filled with non shrinkable grout.

## Typical Section Through Wall

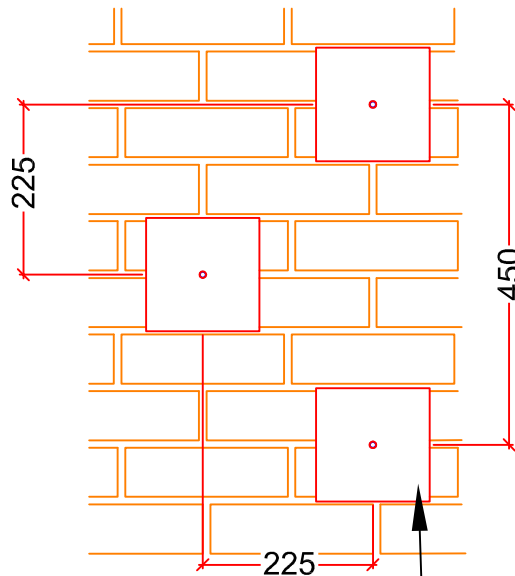

Dimensions shown are typical, the exact location and numbers to be agreed on site.

## Typical Elevation On Both Sides

**NOTE** Similar SS sock anchors to "Sockfix" may be used if approved by Engineer.

**Place:** Kenwood House, Lady Mansfield's Bedroom

**Title:** Through Ties - Anchors and Plates.

**Civil & Structural Engineering**

**Date:** 20.11.15

**Project Engineer:** Stephen Parris

**Scale:** 1:10 @ A4

**Sketch No:** SK004

**Job No:** 19865



Historic England

The Engine House  
Fire Fly Avenue, Swindon, SN2 2EH  
Tel 01793 414 700