

VL4-2424

V Line Panel Filter 24x24x4

Description/Application

V Line - Disposable pleated panel filters

Description

Disposable pleated panel filter made with both a water resistant card frame and retaining face. The V Line panel filters use a flame retardant, 100% thermally bonded polyester filter media backed with an expanded galvanised steel mesh.

Application

General heating and air-conditioning.

As a pre-filter to bag filters.

Specification

EU Grade

G4

Efficiency (>95%)

5 Micron

Capacity

Rated Capacity (CFM): 2018

Rated Capacity (M³/hr): 3430

Resistance

Initial Resistance: 1"/25MM: 40Pa 2"/50MM: 40Pa 4"/95MM: 40Pa


Final Resistance: 1"/25MM: 150Pa 2"/50MM: 150Pa 4"/95MM: 150Pa

Dimensions

Nominal (Inches): 24x24x4

Actual (mm): 594x594x95

Visual

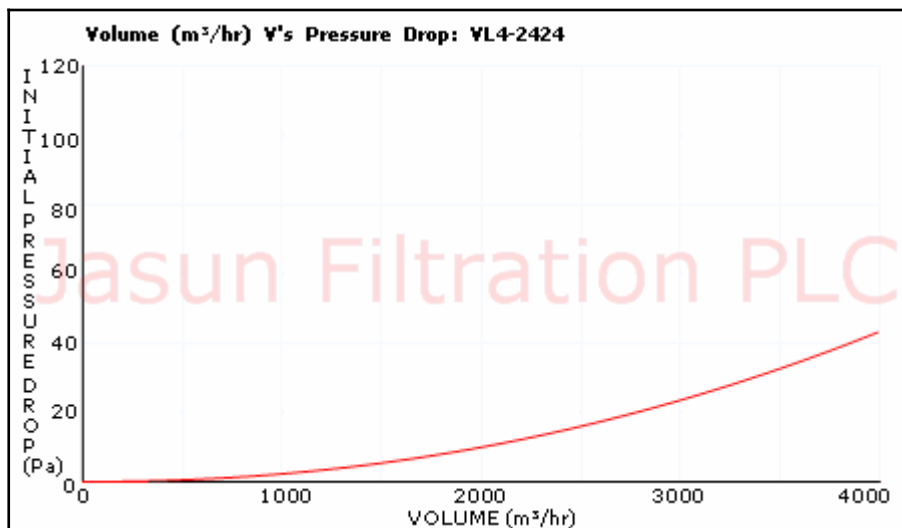

QUALITY STANDARD



FM 29257
BS EN ISO 9001:2000



JASUN

FILTRATION PLC

Riverside House, Parrett Way, Colley Lane, Bridgwater, Somerset TA6 5LB
Tel: +44(0)1278 452277 Fax: +44(0)1278 450873 sales@jfilters.com www.jfilters.com

ENVIRONMENTAL STANDARD



EMS 81914
BS EN ISO 14001:1996