



Typical Plan View Of Tybalds Square Granite Flags (P6) & Adjacent Granite Steps
Scale: 1:20 at A1

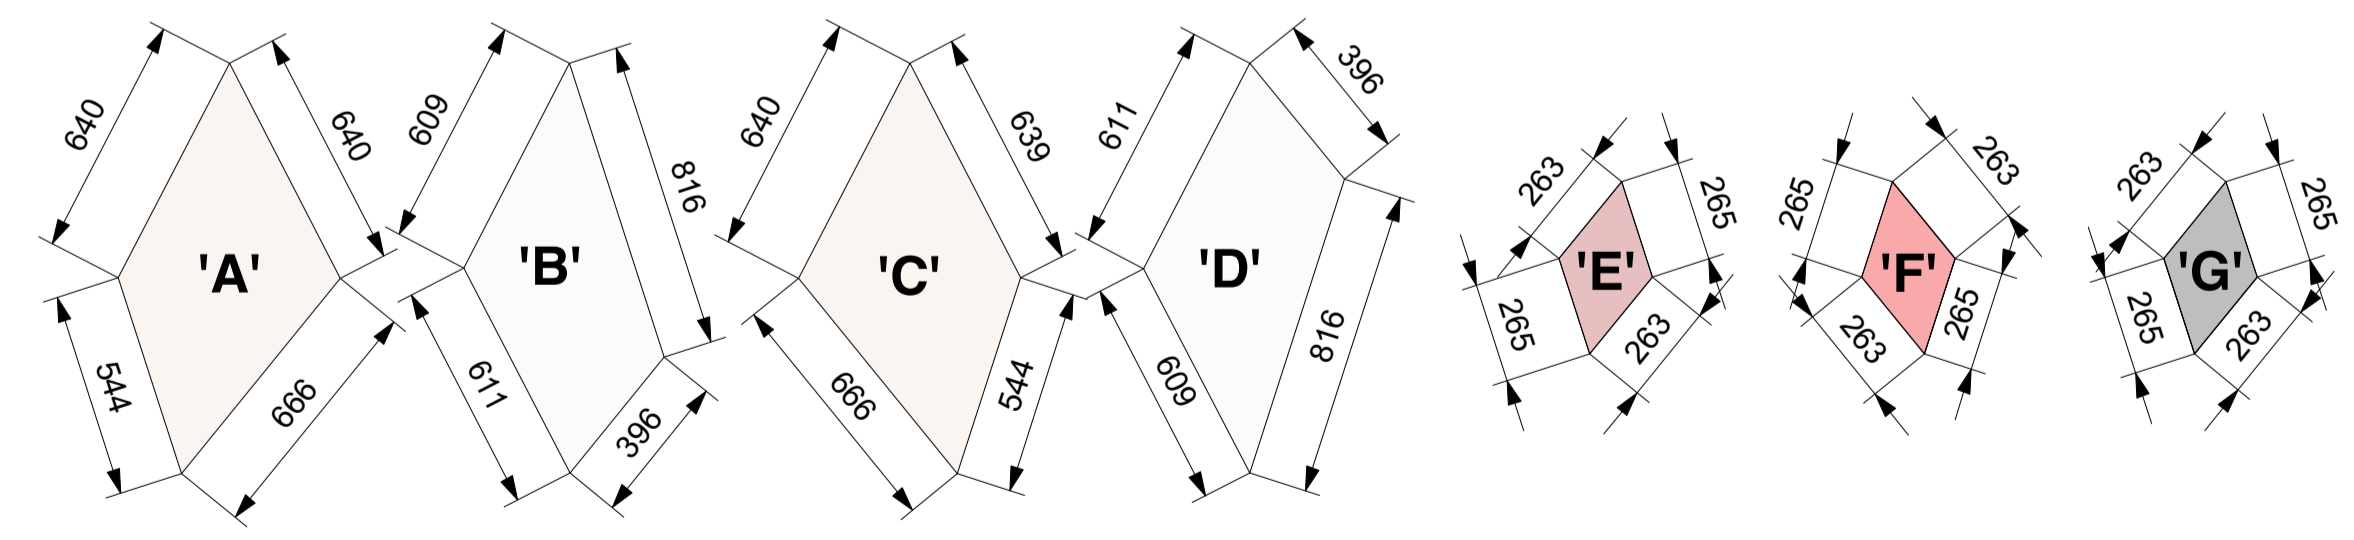

SCHEDULE OF TYBALDS SQUARE GRANITE FLAGS:				
Description:	Reference:	Overall Size:	Granite Colour:	Granite Finish:
Tybalds Square Granite Flag - TSGF-'A'	'A'	1093 x 587 x 125mm	Barleycorn Magma	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'B'	'B'	1084 x 580 x 125mm	Pink Pearl	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'C'	'C'	1084 x 587 x 125mm	Barleycorn Magma	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'D'	'D'	1084 x 580 x 125mm	Pink Pearl	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'E'	'E'	463 x 251 x 125mm	Terra Red	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'F'	'F'	463 x 251 x 125mm	Raw Silk	Sawn & Flamed Top. Sawn Finish to all other faces.
Tybalds Square Granite Flag - TSGF-'G'	'G'	463 x 251 x 125mm	Oceanic Blue	Sawn & Flamed Top. Sawn Finish to all other faces.

Note: Tybalds Square paving arrangement created by repeating pattern of 5no. flags (to form diamond configuration). Adjacent diamond configurations within rows are mirrored to create a contrast. Central stone to be sourced in 3no. alternate colours.

Stone Schedule & Dimensions Of Tybalds Square Granite Flags (P6)
Scale: 1:20 at A1

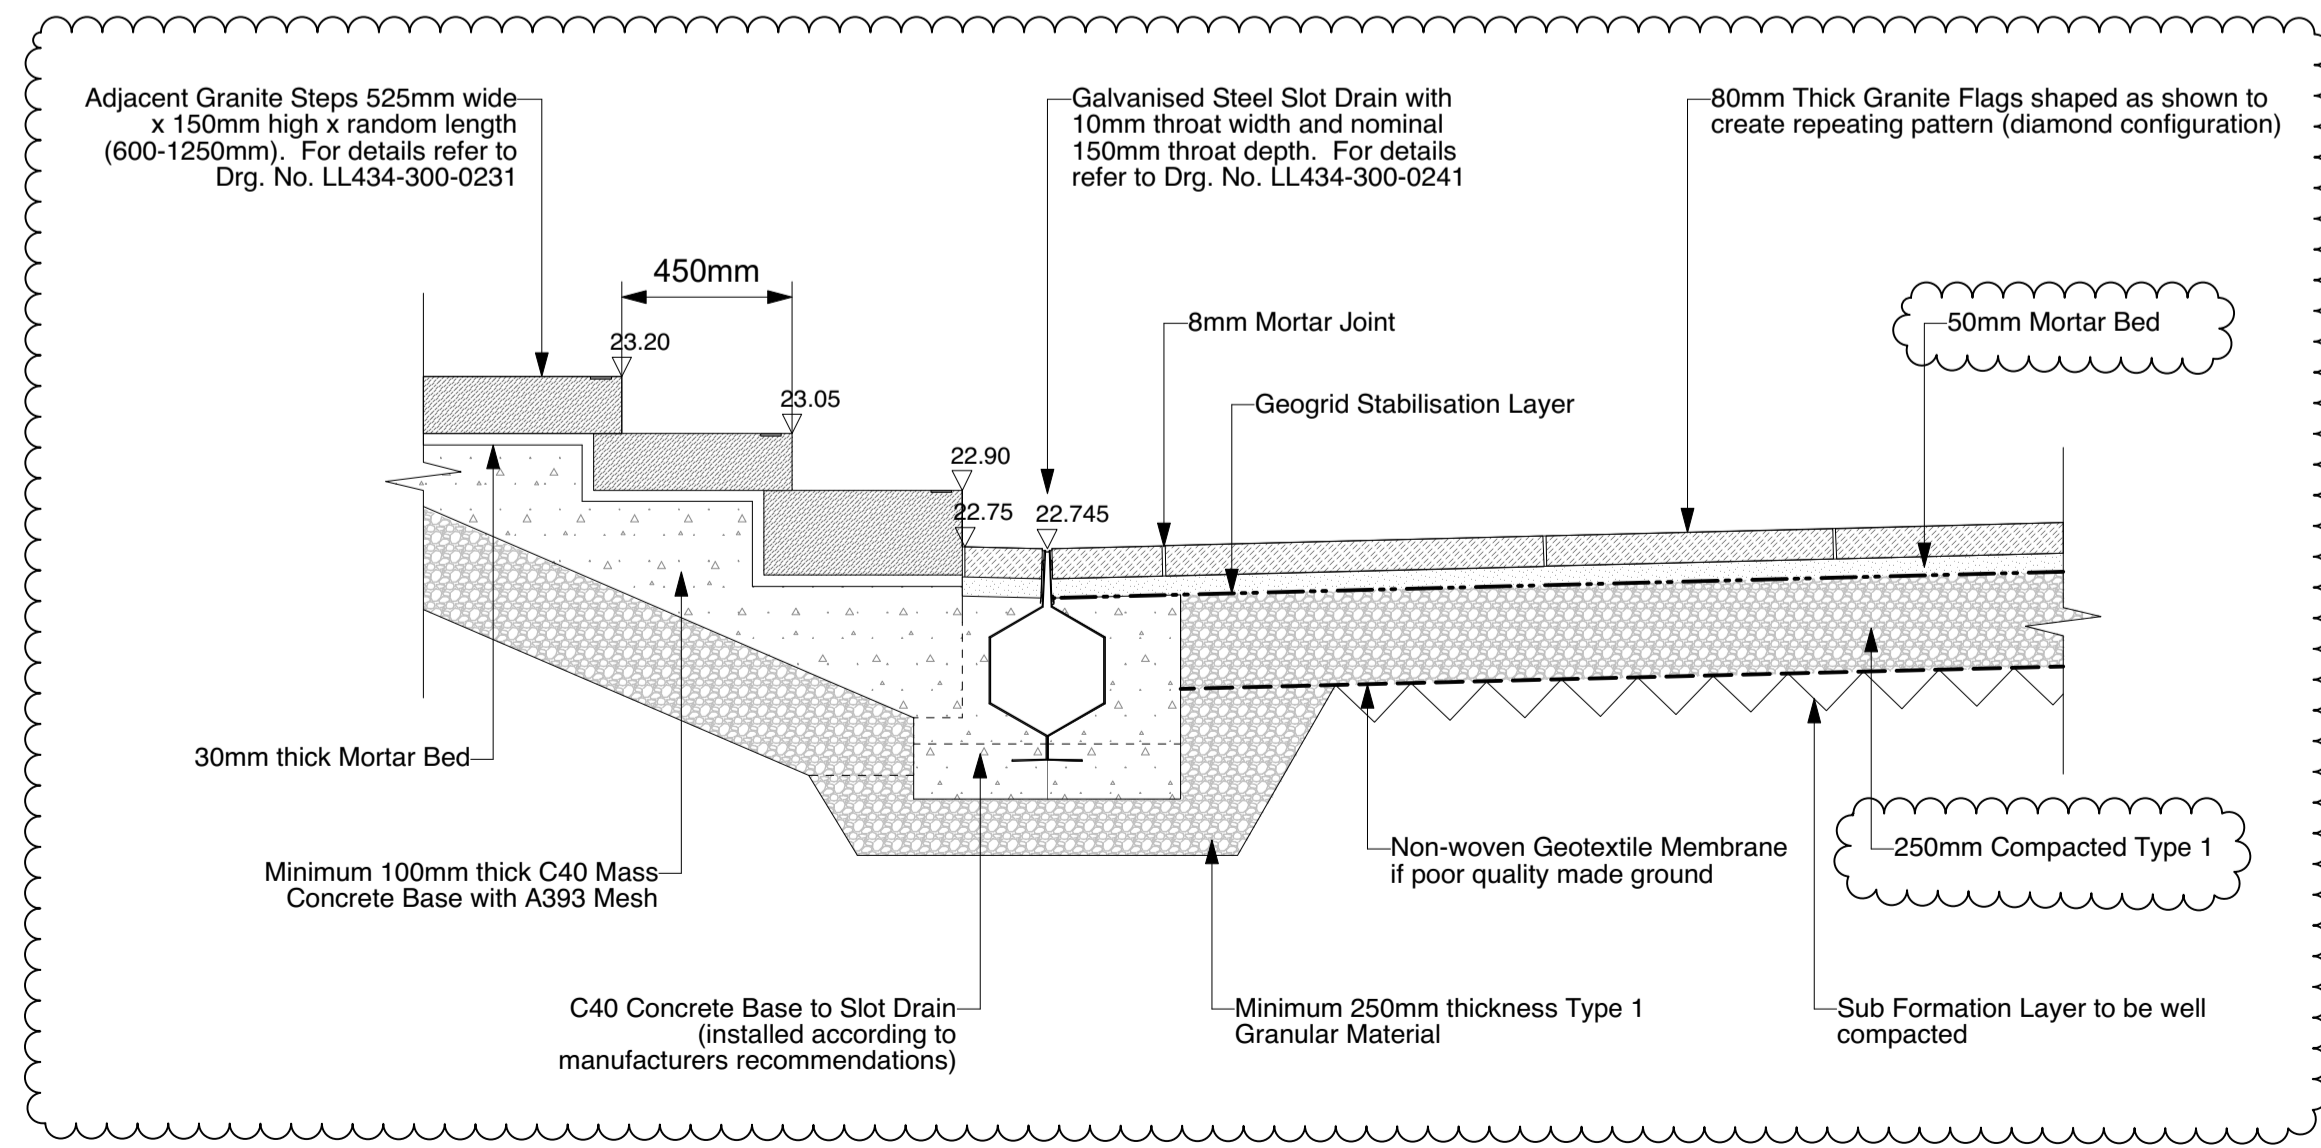


Typical Section Through Tybalds Square Granite Flags (P6) & Adjacent Granite Steps
Scale: 1:20 at A1

- NOTES:**
- All dimensions in millimetres unless otherwise shown.
 - All levels in metres above Ordinance Datum (mAOD) unless otherwise shown.
 - All dimensions to be checked on site and any discrepancies reported to Employer before pricing / work starts.
 - Any ambiguities or discrepancies within this drawing or between this drawing and any other information given elsewhere must be reported to Camlins and the Employer for clarification before pricing / work proceeds.
 - All drawings to be read in conjunction with other Camlins drawings and specification and with relevant Engineer's and Architect's work packages as appropriate.
 - All works carried out in accordance with the latest British Standards and appropriate codes of practice as a minimum.
 - For confirmation of architectural details refer to Architects drawings.

TYBALDS SQUARE GRANITE FLAGS
80mm thick Granite Flags to be laid in repeating pattern as shown. Flags to be laid so as to achieve an even and smooth pedestrian surface to the approval of the Landscape Architect.
For overall dimensions of granite and granite colours refer to 'Stone Schedule & Dimensions Of Tybalds Square Granite Flags' below.
Total extent of Tybalds Square Granite Flags = 23380mm x 18000mm.
Paving shall conform to BS EN 7533.
Possible Supplier Granite Flags
Hardscape Ltd, Unit 25, Long Marsden Industrial Estate, Stratford Upon Avon, CV37 8QR.
www.hardscape.co.uk
Contact: Dave Lowe Email: dl@hardscape.co.uk Tel.: 0178 972 1012
Mobile: 07734103614
Flags to be laid so as to achieve an even and smooth pedestrian surface to the approval of the Landscape Architect. Construction of pavements in clay pavers shall be in accordance with BS 7533-3: 2005.
Cutting Of Flags
All cuts within flags to be of the same quality as the original production masonry. Cuts only required at margins of Tybalds Square and at interface with slot drain.
Granite Flag Joints & Bedding Mortar
Granite flags to be laid in regular repeating pattern as shown. Joints to be 8mm width. Joint width tolerance to be minimum 6mm maximum 10mm to accommodate flag manufacture tolerance (+/- 2mm). Top of joints to be even throughout and nominally flush with absolutely minimal recess as necessary to accommodate any inconsistencies in stone shape.
Mortar joints to be installed as free-flowing slurry grout.
Jointing grout to be 40N/mm2 minimum compressive strength at time when first trafficked.
Colour of grout to complement adjacent flags and to be approved by Landscape Architect.
Bedding Mortar to be 30N/mm2 minimum compressive strength at the time when first trafficked.
Max. 10mm bedding mortar permitted within joints.
Bedding, priming and jointing mortar system to BS 7533.
Possible Supplier
Parex Mortars, PAREX LTD, Restoration house, Chorley, Lancashire PR6 7DE
Contact: Greg Wright Tel.: 07823 530 688 E-mail: greg.wright@parex.co.uk
www.parex.co.uk
Parex Granatech Natural ELM570.
Base
180mm depth mass concrete base with no expansion joints or reinforcement.
To be PAV2 with 40mm aggregate size and 75mm slump on separation membrane, 125 micrometres thickness.
Concrete base to be separated from adjacent structures by Polyethylene sheet. Install 10mm isolation joint between concrete slab and adjacent structures formed from compressible filler board and polysulphide sealant. Top of joint to be level with top of slab. Finished surfacing to cover joint.
Sub-Base
250mm thickness Type 1 Granular Material to 'Specification For Highway Works' Clause 803.
Back Fill
Material arising from site excavations to Engineers specification. Assumed minimum 15% CBR after compaction.
Rigid paving construction to be suitable for occasional vehicular traffic.

EMPLOYER APPROVAL
Samples of all paving materials to be submitted to the Employer for approval prior to ordering. Material samples submitted to the Employer are to be a true representation of that material type. Submitted samples to be retained by the Employer for reference.
In-situ sample panels of all proposed paved surfaces to be approved by the Employer prior to the laying of significant areas of that paving type. In-situ sample panels to be a minimum plan size of 2m x 2m and to demonstrate proposed laying method, paving pattern, joint tolerances, joint stagger, quality of cuts etc. Sample panel to be retained as a permanent reference of the agreed paving quality.

Revisions				
Rev	Date	Description	Revised by	Checked by
A	11.11.2015	Levels have changed on Tybalds Square & Steps.	JS	DWJ
B	09.12.2015	Reduced thickness to (P6) Granite Flags and associated Concrete Base. Amended paving build-ups to reflect Structural Engineers drawings.	JS	DWJ



TENDER
TYBALDS ESTATE, LONDON
LONDON BOROUGH OF CAMDEN

P6 Paving Details - Tybalds Square Flags
Drawing No.: LL434-300-0204
Revision: B
Scale: 1:20@A1
Date: 25.08.2015
Drawn by: DWJ
Checked by: PSS