

# DECKING EUROPEAN TREATED REDWOOD



## AVAILABLE GRADES:-

5th Grade

Live sound knots, no wane, no blue stain

### PROPERTIES

BOTANICAL NAME	Pinus sylvestris
PHYSICAL/STRUCTURAL PROPERTIES	Strong and moderately hard
MOISTURE CONTENT	16 - 18%
TYPICAL APPLICATIONS	Joinery - windows and doors, decking, cladding, construction
DENSITY	510kg/m <sup>3</sup>
ORIGIN	Finland, Sweden, Denmark and Norway
DURABILITY	AC500 vacuum pressure treatment and to user class 3 minimum 15 year desired life
ENVIRONMENTAL CREDENTIALS	FSC® / PEFC
STORAGE ADVICE	Undercover Always
SUPPLIED FINISH	Machined to profile
WORKING PROPERTIES	Capable of a smooth clean finish, stains and varnishes well


### EUROPEAN TREATED REDWOOD DECKING

Product	Profile	Code	Available ex-Stock	Environmental Credentials
<b>Deck boards</b>				
26 x 117mm	Reversible	JR3212	Y	FSC / PEFC
32 x 117mm	Reversible	JR3812	Y	FSC / PEFC
28 x 145mm	Reversible	JR3215	Y	FSC / PEFC

### SOFTWOOD DECKING COMPONENTS

<b>Rails</b>				
34 x 78mm x 2.4m - 5.4m	Patterned Handrail	T0004758	Y	PEFC
34 x 78mm x 2.4m - 5.4m	Patterned Handrail	T0004398	Y	FSC
32 x 78mm x 2.4m - 5.4m	Baserail	T0004389	Y	FSC
32 x 78mm x 2.4m - 5.4m	Baserail	T0005454	Y	PEFC
12 x 42mm x 2.4m - 5.1m	Fillet	50003730	Y	FSC/PEFC
<b>Posts</b>				
82 x 82mm x 1.200m	Chamfered	50006186	Y	PEFC
82 x 82mm x 1.250m	Chamfered & Bead	50006172	Y	PEFC
82 x 82mm x 1.200m	Rounded 4	50006197	Y	PEFC
95 x 95mm x	Rounded 4	T0005341	Y	PEFC
82 x 82mm x 1.200m	Traditional Cap	50003470	Y	FSC/PEFC
<b>Components</b>				
41 x 41mm x 895mm	Chamfered	50006070	Y	PEFC
41 x 41mm x 895mm	Turned	50006068	Y	PEFC
41 x 41mm x 900mm	Rounded 4 corners	T0004417	Y	FSC

Additional specifications, sizes, chain of custody and specials are available to order

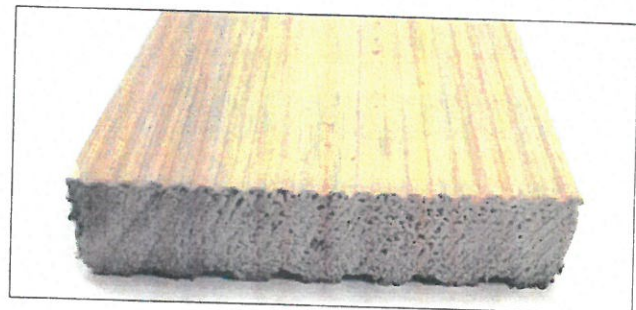

#### SCOTTISH DECKING SALES

0844 728 0322

E: decking1@internationaltimber.com

#### NORTHERN DECKING SALES

0844 728 0342

E: decking2@internationaltimber.com

#### SOUTH WEST DECKING SALES

0844 728 0362

E: decking3@internationaltimber.com

#### SOUTH EAST DECKING SALES

0844 728 0392

E: decking4@internationaltimber.com

# DECKING SLIP RESISTANT




## SLIP RESISTANT DECKING

Decking with in-built anti-slip strips designed to prevent slips and falls.

### PROCESS

Anti-slip strips are factory applied to the decking. A blend of resin, fillers and hard-wearing anti-slip aggregates are injected into grooves of the decking and allowed to cure. The aggregate on the finished strips sits proud of the timber surface. It provides hardwood and softwood decking with additional grip, particularly in wet or icy weather. The anti-slip strips are applied before the application of stains or preservatives.

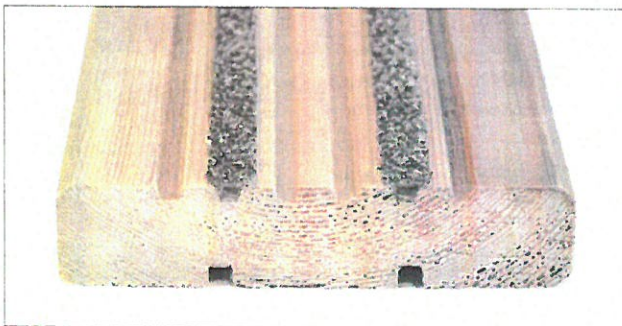

### BENEFITS

The aggregate and resin infills give a certain amount of protection against wear. More importantly, the strips provide additional grip under foot for pedestrians, particularly when timbers are wet or icy, thus reducing the risk of slips and falls. The product has been tested to BS7976-2: 2002 in accordance with the guidelines recommended by the U.K. Slip Resistance group. We recommend two strips of non slip for domestic applications and three strips for commercial and public areas.

### SIZES

Anti-slip strips can be applied to deck boards with grooves that have a width of between 5-10mm and a depth between 4-6mm. Deck boards are available in a choice of profiles – smooth and grooved. To further enhance your deck, we are able to offer a factory finish coating which will protect the look of your deck for a minimum of five years.

Anti-slip strips can be applied to all species of decking. Please contact the technical sales line for enquiries.



## FEATURES AND BENEFITS

- 3 YEAR GUARANTEE ON INSERTS
- 100 PTV RESULTS
- COLOURED INSERTS
- HARD WEARING AGGREGATE
- BESPOKE CUTTING SERVICE
- VARIETY OF PROFILES & LENGTHS
- FITTED AS TIMBER DECKING
- LOW MAINTENANCE
- NATURAL AESTHETICS OF TIMBER