SERIES GECA-RC
Removable
Core
Eggcrate
Grilles

PUBLICATION

GRILLES 5

MAY 2005

Features

Removable Eggcrate

Core.

- 13mm x 13mm Eggcrate Core.
 - Optional Filter Media.
 - Matching Plenum Series.
 - All Extruded Aluminium Construction.





SERIES GECA-RC

Introduction

Gilberts GECA-RC Series provides an architecturally and aesthetically pleasing range of Removable Core Eggcrate Extract Grilles suitable for both ceiling and sidewall mounting applications. All units comprise of a 13mm Eggcrate central core with channel frame border which is located in a diffuser type housing frame using easy fit screw fasteners.

This allows for simple core removal for cleaning, access and installation.

The GECA-RC can be supplied complete with a washable filter media which is secured between the eggcrate core and rear retaining straps. Removal of the core allows the filter media to drop out for cleaning or replacement.

Series Options:

TYPE GECA-RC - 13mm square Eggcrate Grille with removable core.

TYPE GECA-RCF - 13mm square Eggcrate with removable core complete with 12mm washable filter media.

Manufactured throughout from extruded aluminium the GECA-RC Series is available with standard accessories such as screwdriver operated opposed blade volume control dampers. Top or side entry plenum connection boxes can also be provided.

Standard finish is Polyester Powder White with other colours and finishes available on request.

Table of Recommended Velocities

Performance Data

All GECA-RC units can be sized and selected from the nomogram up to a maximum size of 1200 x 1200.

References used:

PRESSURE: All pressures are in

Pa (N/m²).

SOUND: Measured in average


dbA level.

Selection Procedure

When referring to the table, determine the maximum permissible velocity relative to the volume for the application. Reference can then be made to the sizing nomogram from which the terminal size can readily be determined and additional data such as sound levels, jet velocity and pressure drops calculated.

Space Served	Sound Level db 'A' Scale	Air Volume	0.05 m³/s	0.25 m³/s	1.0 m³/s
Broadcasting & Recording Studios	20 - 25	Velocity m/s	2.0	1.5	1.0
Board or Conference Rooms Churches, Concert Halls, Hospitals, Lecture Theatres, Offices, Hotels, Private Hous	,	Velocity m/s	3.0	2.5	2.0
Banks, Courtrooms, General Offices, Libraries, School Classrooms	35	Velocity m/s	3.5	3.0	2.5
Cinemas, Department Stores Restaurants	s, 40	Velocity m/s	4.0	3.5	3.0
Computer Rooms, Supermarkets	45	Velocity m/s	4.5	3.75	3.25
Laundries and Kitchens, Typing Pools, Pools, Sports Arenas Light Engineering Factories,	50	Velocity m/s	5.0	4.25	3.5
Heavy Engineering Factories	60	Velocity m/s	8.0	6.5	5.0


Dimensional Data

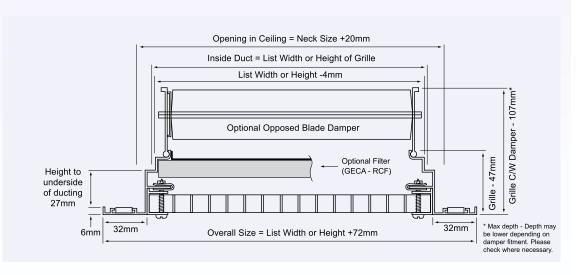



SERIES GECA-RC


Sizing Nomogram

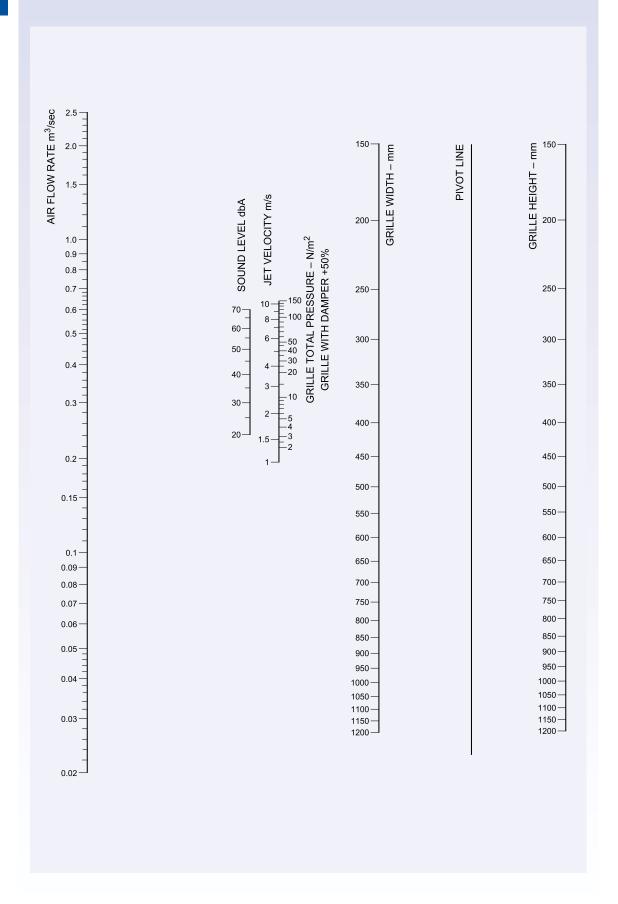



SERIES GECA-RC

Ordering Specification

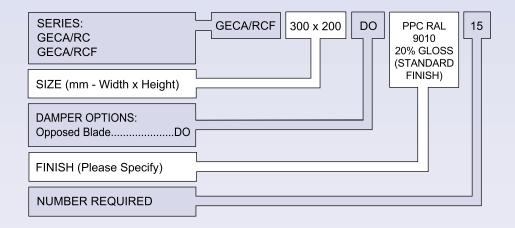

FIXING

Grille only (solid duct connection): Drill and rivet through grille neck.

Grille with plenum (flexible duct connection): Standard support is via drop rods (by others) to slots on grille plenum.

SIZE RANGE

From 100 x 100 up to 1200 x 1200 in 1mm increments as standard. For other sizes please contact head office.

PLENUM/CONNECTION **BOXES**

A full range of purpose made matching plenum connection boxes are available in both top and side entry formats. For full details please refer to the grilles options and accessories data sheet.

FINISH

Standard Finish: Polyester Powder Coat White

Ral 9010 20% Gloss

Special Finishes: Polyester Powder Finish to

stock BS or RAL Colour (Dampers Mill Finish Aluminum

or Galvanised Steel)

OPTIONS

Special fixing, border and damper options detailed separately in grille options and accessories data.

Contact

GILBERTS

Head Office and Works GILBERTS (BLACKPOOL) LTD Gilair Works, Clifton Road, Blackpool. Lancashire FY4 4QT.

Telephone: (01253) 766911 (01253) 767941 Fax:

e-mail: sales@gilbertsblackpool.com www.gilbertsblackpool.com Web:

