


MINIMUM 1:3 CEMENT:
SHARP SAND DRYPAK
WELL RAMMED IN

POCKET CAREFULLY
CUT IN WALL TO ALLOW
INSERTION OF BEAM END.
POCKET INFILLED WITH
BRICKWORK AFTER BEAM
INSTALLATION

PARTY WALL

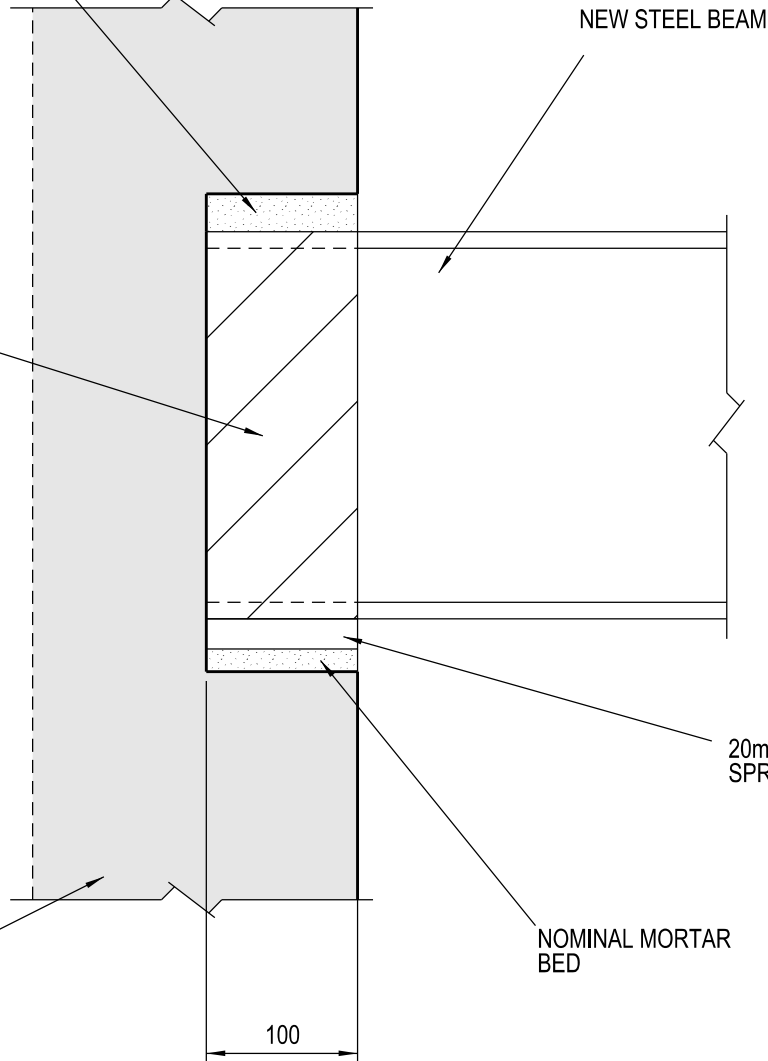

REV	DATE	DESCRIPTION	BY	CHECKED
 consulting structural and civil engineers		ROOF BEAM SUPPORT DETAIL		
40 BOWLING GREEN LANE LONDON EC1R 0NE		T +44(0)20 7415 7032 F +44(0)20 7837 7612 W www.morphstructures.com E mail@morphstructures.com		
MAR 2016		1:5@A4		16 CHALCOT SQUARE
DR		AG		2113-sk002.dgn
2113		SK002		INFORMATION
DR		AG		P1
2113		SK002		P1