




PART PLAN OF DORMER SURROUND

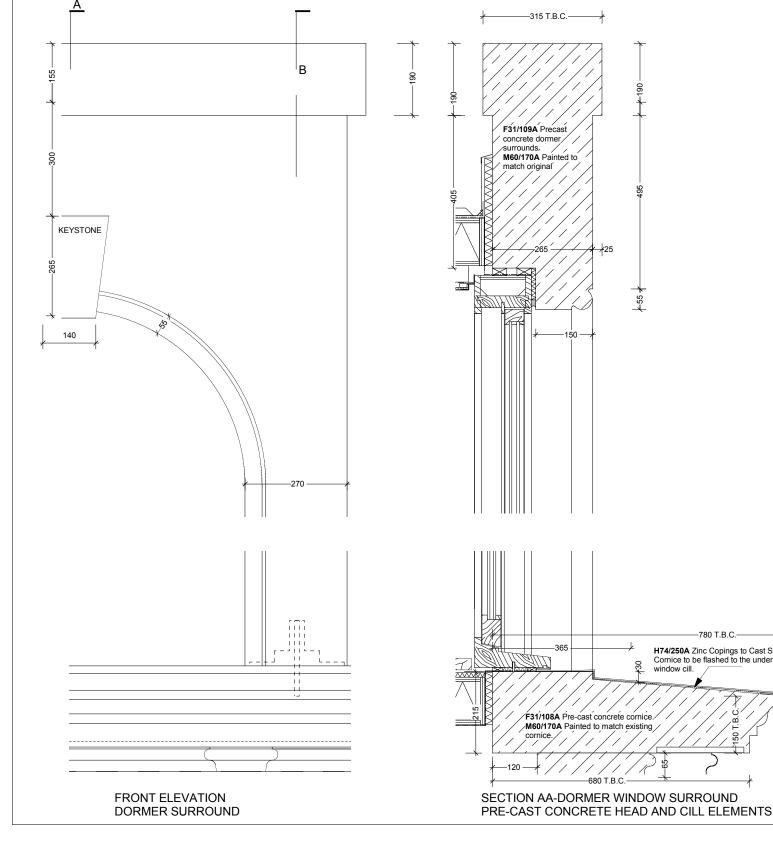

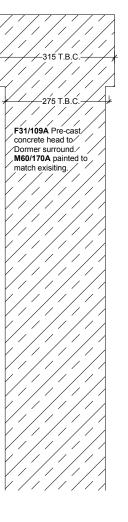

-780 T.B.C.-

H74/250A Zinc Copings to Cast Stone Cornice to be flashed to the underside of

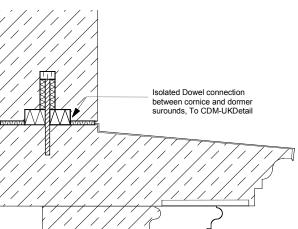

SECTION-BB DORMER WINDOW SURROUND PRE-CAST CONCRETE SURROUNDS

Drawing to be read in conjunction with all information by architects, structural engineer & service consultants.

See Clause C40+41 for specifications describing cleaning and repair to existing masonry

See Clause M60/170A for specifications describing masonry paint to precast concrete elements.


and new pre-cast concrete items

All pre-cast concrete to be painted to match original colour of existing window surrounds.


All dimensions of the cast stone and stucco items are indicative and based on dimensions of features as existing. Dimensions of features vary over length of facades. All features to be measured by SC and approved by the architect and Camden planning department.

This drawing applies to dormer surounds and pediments and to the following windows: W3.01-3.10 and W3.20-3.25

Support systems to Pre-cast concrete to be designed by supplier . Secondary Steelwork to SE Design. Supplier to co-ordinatie fixings etc. to all secondary steelwork with S.Contractor. All details to be approved by C.A.

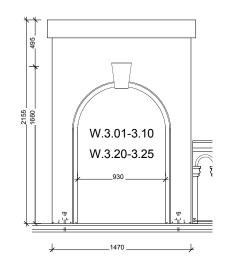

Elevation of square head dormer 15 Nos. Scale 1:20@A1



			Issue
CONSTRUCTION	0706	[21.5]12	Α

Scale _1:5@A1 Scale _1:10@A3

PROPOSED DORMER SURROUNDS
PRECAST ELEMENTS-SUARE HEAD

THE LIGHTHOUSE BLOCK LONDON WC1X

