
## NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER ENGINEER'S AND ARCHITECT'S DRAWINGS, DETAILS & SPECS.

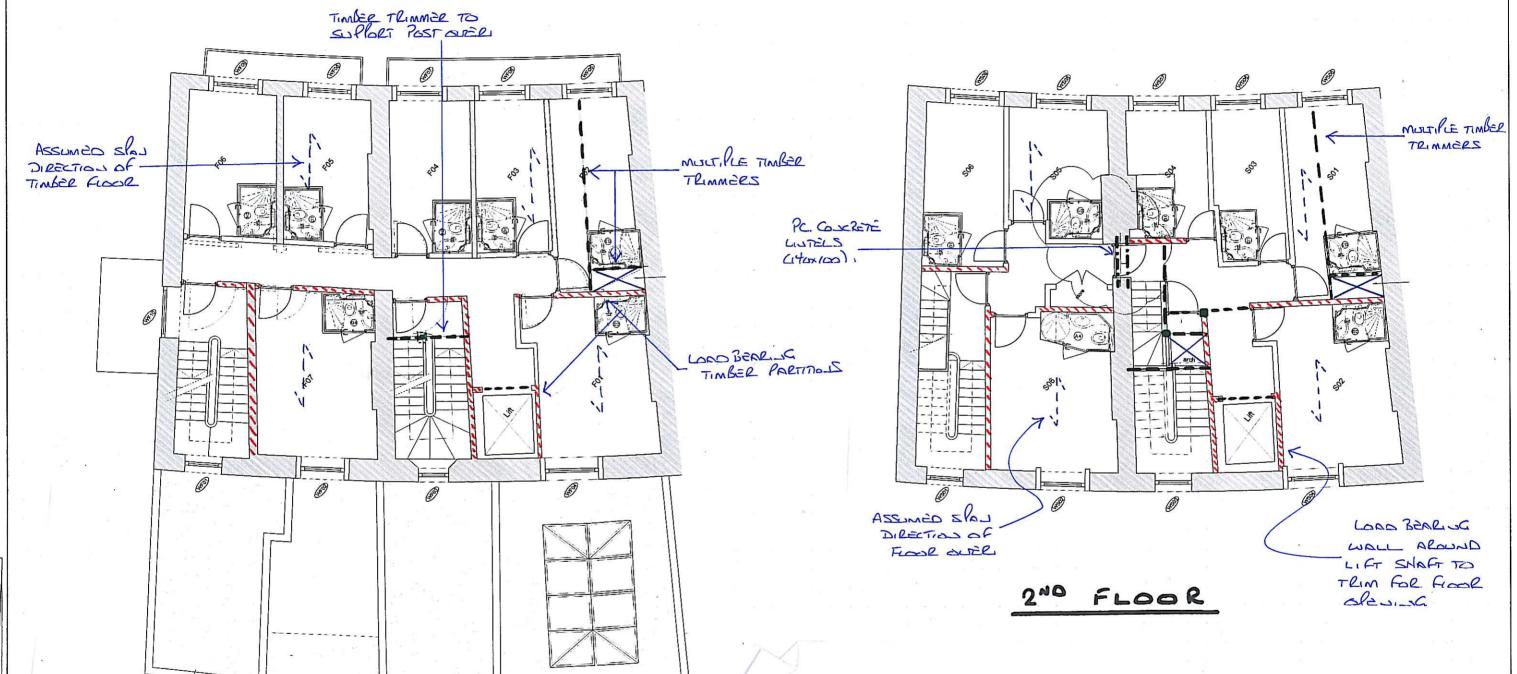

IST FLOOR

- . GAUGING TIMBERS WITHIN EXISTING MASONRY WALLS WHICH ARE ROTTEN TO BE CLEAR FULLY REMOVED SEQUENTIALLY, AND IN FILLED WITH BONDED MASONRY.
- 2. STRUCTURAL DETAILS AND ARRANGEMENTS INDICATED ON THESE PLANS HAVE BEEN PREPARED WITH NO INTRUSIVE INVESTIGATIONS, AND ARE THEREFORE SUBJECT TO CHANGE UNTIL SUCH TIME OPENING UP WORKS HAVE BEEN COMPLETED.
- ALL INTERNAL TIMBER STUD PARTITION TO BE LINED WITH 12MM PLYWOOD TO PROVIDED ADDITIONAL ROBUSTNESS TO STRUCTURE.
- 4. CONDITION OF EXISTING STRUCTURAL TIMBER MEMBERS, TO BE INSPECTED AND ASSESSED BY <u>TIMBER SPECIALIST</u> TO IDENTIFY ANY AREAS THAT MAY REQUIRE SPECIALIST TREATMENT.

								50
P1	1 PRELIMINARY							
REV.	BY.	CHKD.	DATE					
10.11	_	CI à	HOUSE,	52 LINC		DS, LONDON, WC2A FAX, NO. 0203 206 0		SURVEYORS
CLIENT CLEGGE ST PLOSECTS							SCALE	1:100
PROJECT THE AVALOS HOTEL							DATE	JUNE 2008
THE 1ST & 2MP FLOOR SHOWING STRUCTURE							DRAWN	55
							CHKD.	
JOB N	0. 2	14415	3	ORG No.	303	REV. ρ,	APPD.	

A3

COPYRIGHT : THE COPYRIGHT OF THIS DRAWING IS VESTED IN CLANCY CONSULTING LTD. IT SHALL NOT BE USED WITHOUT PERMISSION BY ANYONE FOR ANY PURPOSE. DO NOT SCALE - IF IN DOUBT ASK