
















Existing FFL's taken from HBG Technical Services drawing 4936/S/A/1/910-914. Proposed FFL taken above highest point of existing level assuming 75mm clear floor void +25mm floor finish zone and rationalised between first and fifth floors.

- |   |  |
|---|--|
|    | <p>Vinyl flooring with continuous coving<br/>: 100mm high<br/>Ref: TBC</p>   |
|    | <p>Lightwell Staircase<br/>: 30-40mm TBC Solid Ash Tread<br/>Ref: TBC<br/>Refer to WP-15900-G-A1607 &amp; A2716-18</p>                       |
|    | <p>: Vinyl flooring<br/>Ref: TBC</p>   |
|    | <p>: Metal treads with contrasting gradius(OEA) nosing<br/>: to sub-contractors details<br/>Ref: TBC</p>                                     |
|    | <p>: Base build finish<br/>: Timber floating floor</p>   |
|    | <p>: Timber finish specification TBC<br/>Ref: TBC</p>  |
|    | <p>: Porphyry stone flooring<br/>Ref: TBC</p>  |
|    | <p>: Base build finish<br/>: tamped concrete</p>   |
|    | <p>: 'Table Top' and Floor Glazing to fabricators'<br/>specification and details TBC</p>   |
|   | <p>: Heavy duty vinyl floor finish<br/>colour and Specification TBC</p>  |
|  | <p>: Recessed lift floor tray to accept rubber<br/>flooring inlay. Finish and colour TBC</p>   |
|  | <p>: Remove existing granite plinth carefully and<br/>: relocate in same location flush with proposed<br/>finished floor level</p>           |
|  | <p>: Existing floorboards and floor joists to be retained<br/>: as far as possible. M+E to confirm, SE to<br/>detail trimmers finish TBC</p> |

**NOTE:**

All materials to be strictly installed in accordance with manufacturer's recommendations

All internal wall construction to further details, awaiting receipt of information from Acoustician and HBG Construction

DO NOT SCALE FROM THIS DRAWING



4	RP	24.09.09			Revisions as bubbled
3	RP	18.09.09			Revisions as bubbled
2	MJA	20.02.09			Revisions as bubbled
1	MJA	09.01.09			Floor finishes updated to reflect internal wall amendments
0	MJA	07.11.08			ISSUED FOR CONSTRUCTION
D	MJA	06.10.08			Revisions as bubbled
C	TMB	03.09.08			Revisions as bubbled
B	TMB	26.08.08			V.E. AMENDMENTS
A	MJA	21.07.08			Revisions as bubbled
-	MJA	27.06.08			ISSUED FOR COMMENT

rev	by	date	van	chkd	amendments
			can		



key plan
----------

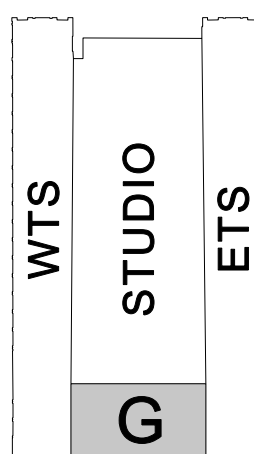

**weedon** partnership architects

Quadrant Court  
47+48 Calthorpe Road  
Edgbaston  
Birmingham  
B15 1TH  
T 0121 454 4171  
F 0121 455 9152  
[www.weedonpartnership.co.uk](http://www.weedonpartnership.co.uk)  
[architects@weedonpartnership.co.uk](mailto:architects@weedonpartnership.co.uk)

BIW reference	15900-G-A1027
---------------	---------------

project

ARGENT ESTATES LTD.  
EGY KINGS CROSS

title
-------

CONTRACT NO. 1  
GRANARY BUILDING  
PROPOSED SECOND FLOOR  
FLOOR FINISHES

drawing status

## CONSTRUCTION

contract no.		scale 1:100 @ A1		
client ref.		date JUNE 2008		
drawn by MJA		checked by		
drawing no	15900	G	A1027	4