



Download or
Request a
Brochure

[About Us](#) | [Contact Us](#)

Now In: [Benlowe Windows](#) → [Browse Windows](#) → New Era Timber Windows

Benlowe Windows

- > **Browse Windows**
- > Building Regulations
- > CE Mark
- > Finishing and Glazing
- > Fitting
- > Maintenance

New Era

Options

- Secured by Design / BS 7950
- Espagnolette Bolts
- Multi-locking Shoot Bolts
- 28mm, 62mm, 89mm & 114mm Cill Projections
- Internal Glazing
- Reflex Hinges
- Egress Hinges
- Factory Glazing
- Brass, Chrome, Silver, White, Gold, Black & Brown Handles
- Bespoke Size & Elevation



Specifications

Description

A stormproof casement window.

Material

Constructed using only FSC® selected Scandinavian Redwood, with full chain of custody.

Preservation

All timber components are double vacuum impregnated with a preservative, to protect against insect attack and fungal decay.

Performance

BSI Kitemarked to BS 644.

Mechanism

Sashes are hung on butt hinges as standard, alternatively reflex hinges may be specified to enable cleaning from within the building.

Weatherseal

The window is fully weathersealed satisfying the requirements of BS 6375 Part1 "Air, Wind and Water Permeation".

Glazing

The window can be factory glazed with 24mm dual seal Kitemarked double glazed units.

Beads

All windows include a projecting bottom bead encompassing the benefits of a fully drained and ventilated glazing system. Aluminium bottom beads may be specified

Cills

Cills may be specified as flush or having either 25mm, 62mm, 89mm, or 114mm projections.

Fittings

Push button handles are fitted to all windows and are available in the following colours: Brass, Chrome, Silver, White, Gold, Black and Brown. Espagnolette or multi-point locking shoot bolts may be specified,

Ventilation

Controllable ventilators can be fitted to the head. One vent is fitted to windows over 484mm wide and two vents to windows over 911mm wide.


Factory Finishing

This is a highly recommended option. To ensure the smooth operation and optimum performance of the window, paints are spray applied, achieving a quality of finish unobtainable with traditional methods.

Maximum Sizes for opening Casements

Side Hung 685W x 1350H
Top Hung 1200W x 1200H

New Era Section

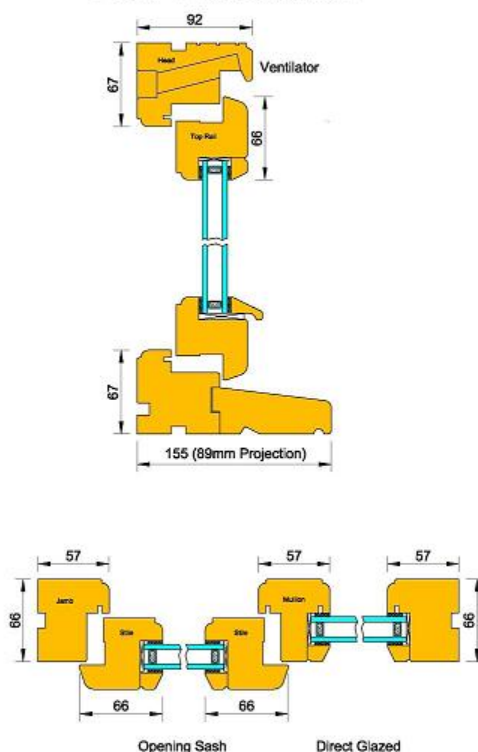



BS 7950 Enhanced Security Windows

Benlowe offer the 'NEW ERA' range of windows, fully tested by UKAS approved laboratories to meet the exacting standard of BS 7950.

With increased strength through selected materials and controlled production techniques, the security window has been developed to include a special ironmongery and glazing requirements necessary to achieve severe security test conditions.

- Sash profiles accept shoot bolts with 4 mushroom head security locking cams.
- Interlocking anti-jemmy security hinge protectors.
- Locking handles with push button release.
- Glazing rebates to accept 24mm double glazing units factory fitted with security tapes.

Cavity Closer

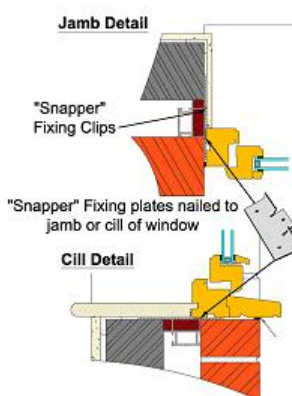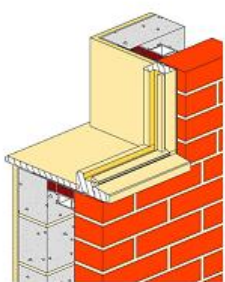

- Suitable for 50, 75 or 100mm cavities. (Also bespoke cavity sizes available)
- Brickwork building former.
- Comes complete with brickwork ties.

Our system allows building to progress by using the closer as a brickwork template for later fixing of the high quality factory finished timber windows snapped into position.

The versatility of the Benlowe cavity closer ensures suitability with check-reveals, stone cills, tile-hanging, timber cladding and is compatible with any size of cavity.

Guarantee



5 Year Guarantee against the need to totally repaint factory finished stained joinery as defined in BS EN 927-1.



10 Year Guarantee against the need to totally repaint opaque factory finished joinery as defined in BS EN 927-1.



10 Year Guarantee on all factory fitted double glazed units.



30 Year Guarantee on timber components against insect attack and fungal decay.

Call our DESIGN TEAM on 0116 239 5353 to discuss your

requirements.

[Home](#) | [Terms & Conditions](#) | [Contact Us](#) | [Returns Policy](#) | [Privacy Policy](#) | [Security Policy](#) | [Site Map](#) | Copyright © 2009 Benlowe Group, All Rights Reserved
Designed and Developed by Infosystems Ltd