


# BASE BUILD-UP SPECIFICATION ADVICE FOR LAYING PERMEABLE RESIN BOUND SURFACING

## Private Driveways - Light Vehicles With Permeable Base

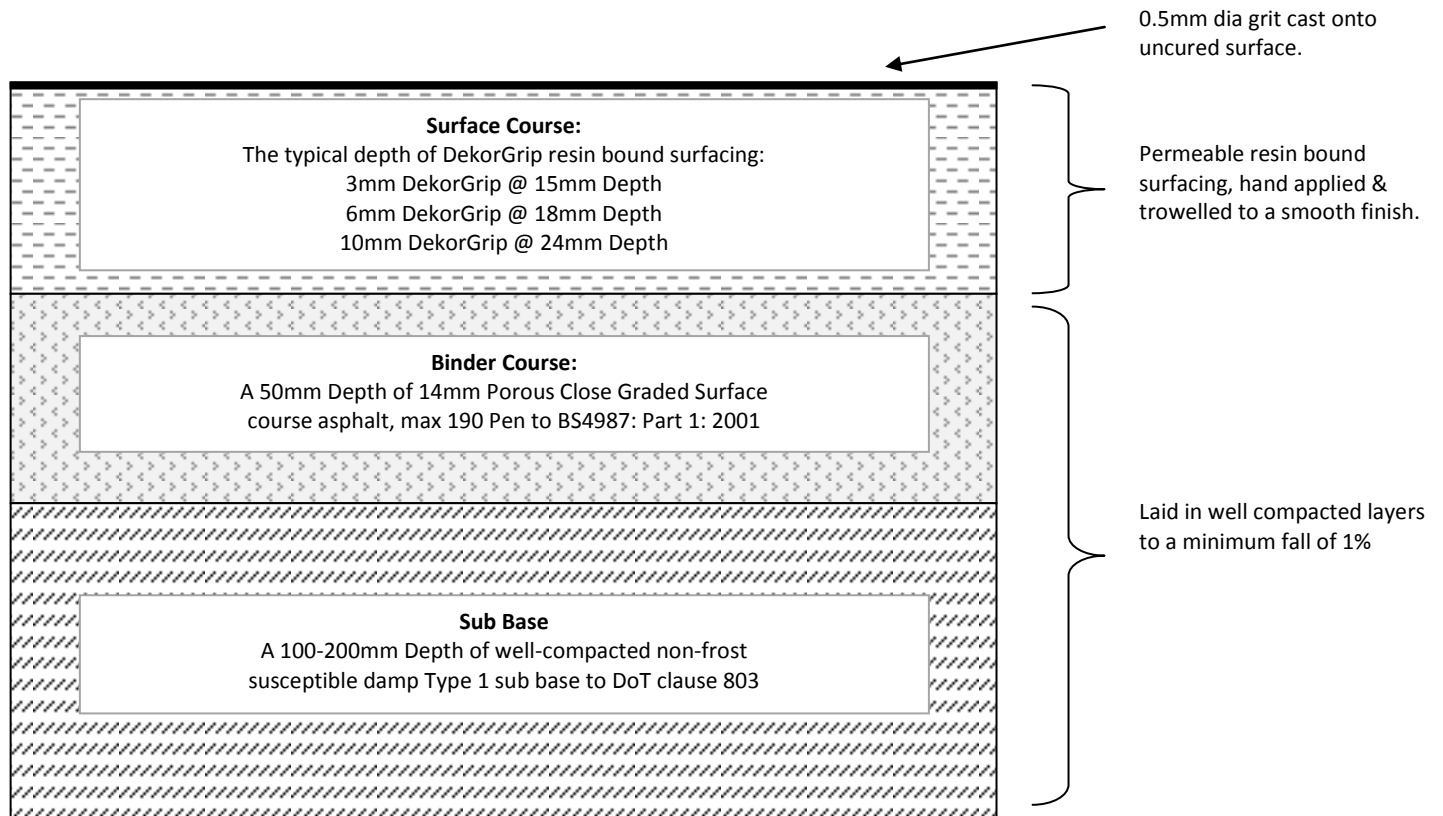

**PURPOSE** To provide a seamless, flexible roadway.

**ADVANTAGES** An attractive and durable surface that absorbs water and remains easy to clean

**NOTES** DekorGrip resin bound can be overlaid onto existing concrete or asphalt surfaces of suitable construction for the traffic expected.  
Joints or cracks in concrete surfaces should be broken out to a minimum of 200mm width and in filled with well compacted macadam base layers as above.  
This specification is based on normal good practice for flexible surfacing and does not absolve the specifier from designing a construction suitable for the expected traffic and ground conditions pertaining on a given site. Areas that maybe trafficked by heavy vehicles should have structural layers designed according to DoT requirements.  
The thickness of the sub-base layer required is dependent on sub-grade soil condition.

The details given in this specification are intended only as a guide in specifying DekorGrip products, actual details should be developed by the project designers taking into account the specific circumstances of the intended application. DekorGrip assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice