
MODEL SPECIFICATION MODUS[™] 1280 RECYCLING HOUSING

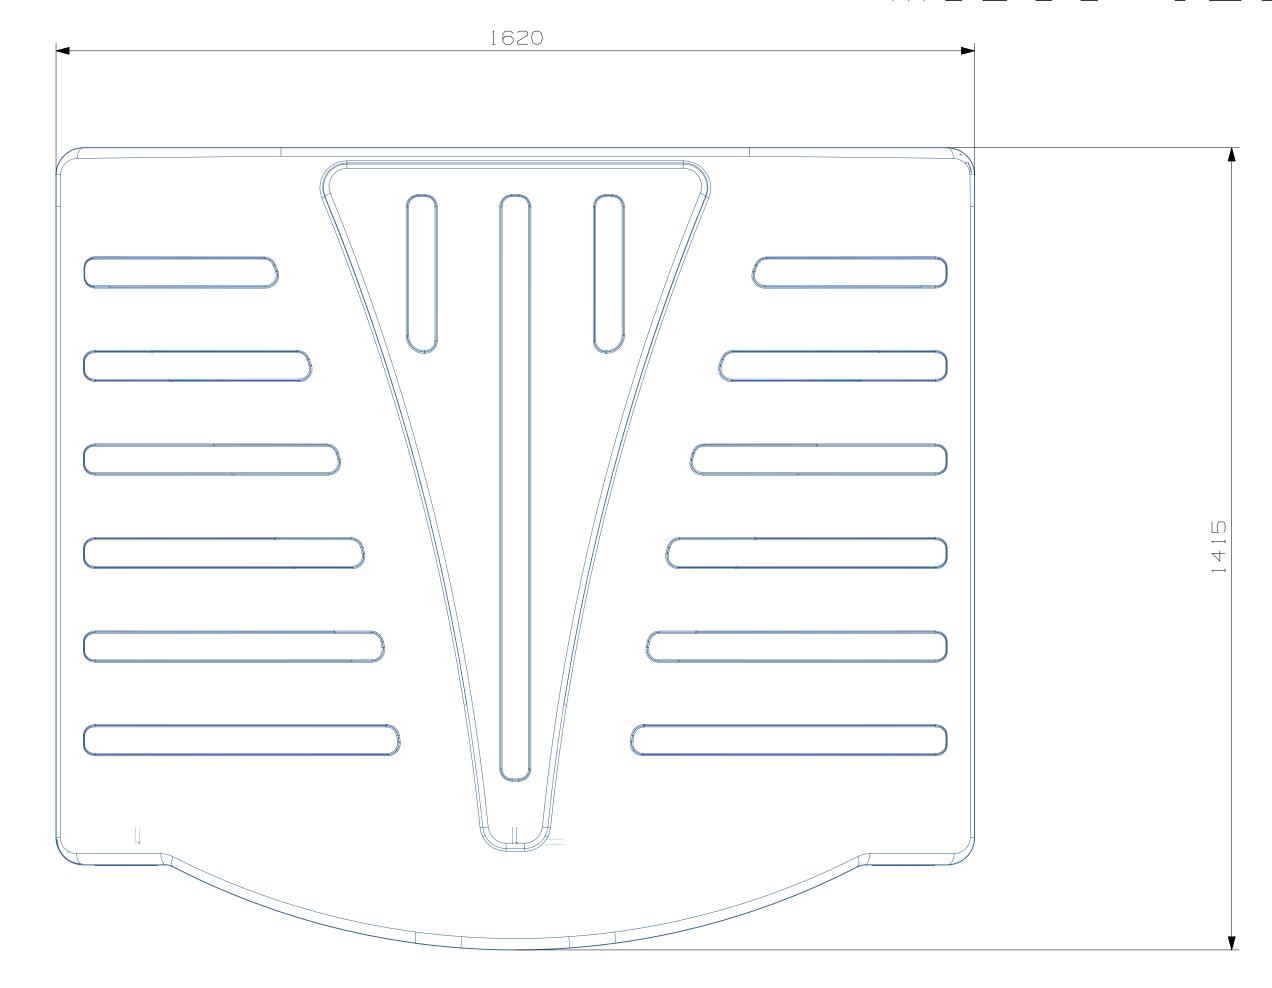

GRAPHIC DIMENSIONS: 1230mm x 313mm

MAXIMUM GRAPHIC

1230

Ø 140 —

PRODUCT INFORMATION:

• DESCRIPTION - A HIGH CAPACITY RECYCLING BIN HOUSING WHICH SECURELY CONTAINS A WHEELED CONTAINER IN A TIDY MANNER.

• WHEELED BIN - 1100Ltr and 1280Ltr.
SIZES/
CAPACITY

• MATERIAL - FRAME - VANDALEX® (ALUMINIUM ALLOY)

ECOBOARD™ PANELLING - 100% RECYCLED POST CONSUMER POLYETHYLENE

HOOD - DURAPOL®

APERTURE - HIGH DENSITY POLYETHYLENE GRAPHIC - PRINTED ON POLYCARBONATE

COLOURS - FRAME - SILVER

- HOOD - ANTHRACITE GREY (RAL 7016)

- ECOBOARD MPANELING - LIGHT GREY MILLSTONE, DARK GREY MILLSTONE - SPIGOT LEGS, DOOR WASTE GUIDE - ANTHRACITE GREY (RAL 7016)

- RUBBER SKIRTING - BLACK

- HANDLE - GREY

- APERTURES & GRAPHICS - SEE RECYCLING OPTIONS.

DIMENSIONS - ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED.

- KEY - 8mm TRIANGULAR - DIN KEY (C101/0012)

OPTIONAL EXTRAS:

FOOD WASTE APERTURE AND CHUTE

BLANKING APERTURE - FOR SECURE STORAGE OF EQUIPMENT

● GLASDON FIRESAFE M - AUTOMATIC FIRE SUPPRESSION DEVICE


APERTURE BRUSHES (ROUND APERTURE ONLY - GLASS RECYCLING)

• WING LOCK - FOR KEYLESS ENTRY

• PERSONALISATION - MAX AREA 1230mm x 700mm

• INTERNAL BALLAST SYSTEM

GROUND FIXINGS - SEE INSTALLATION OPTIONS

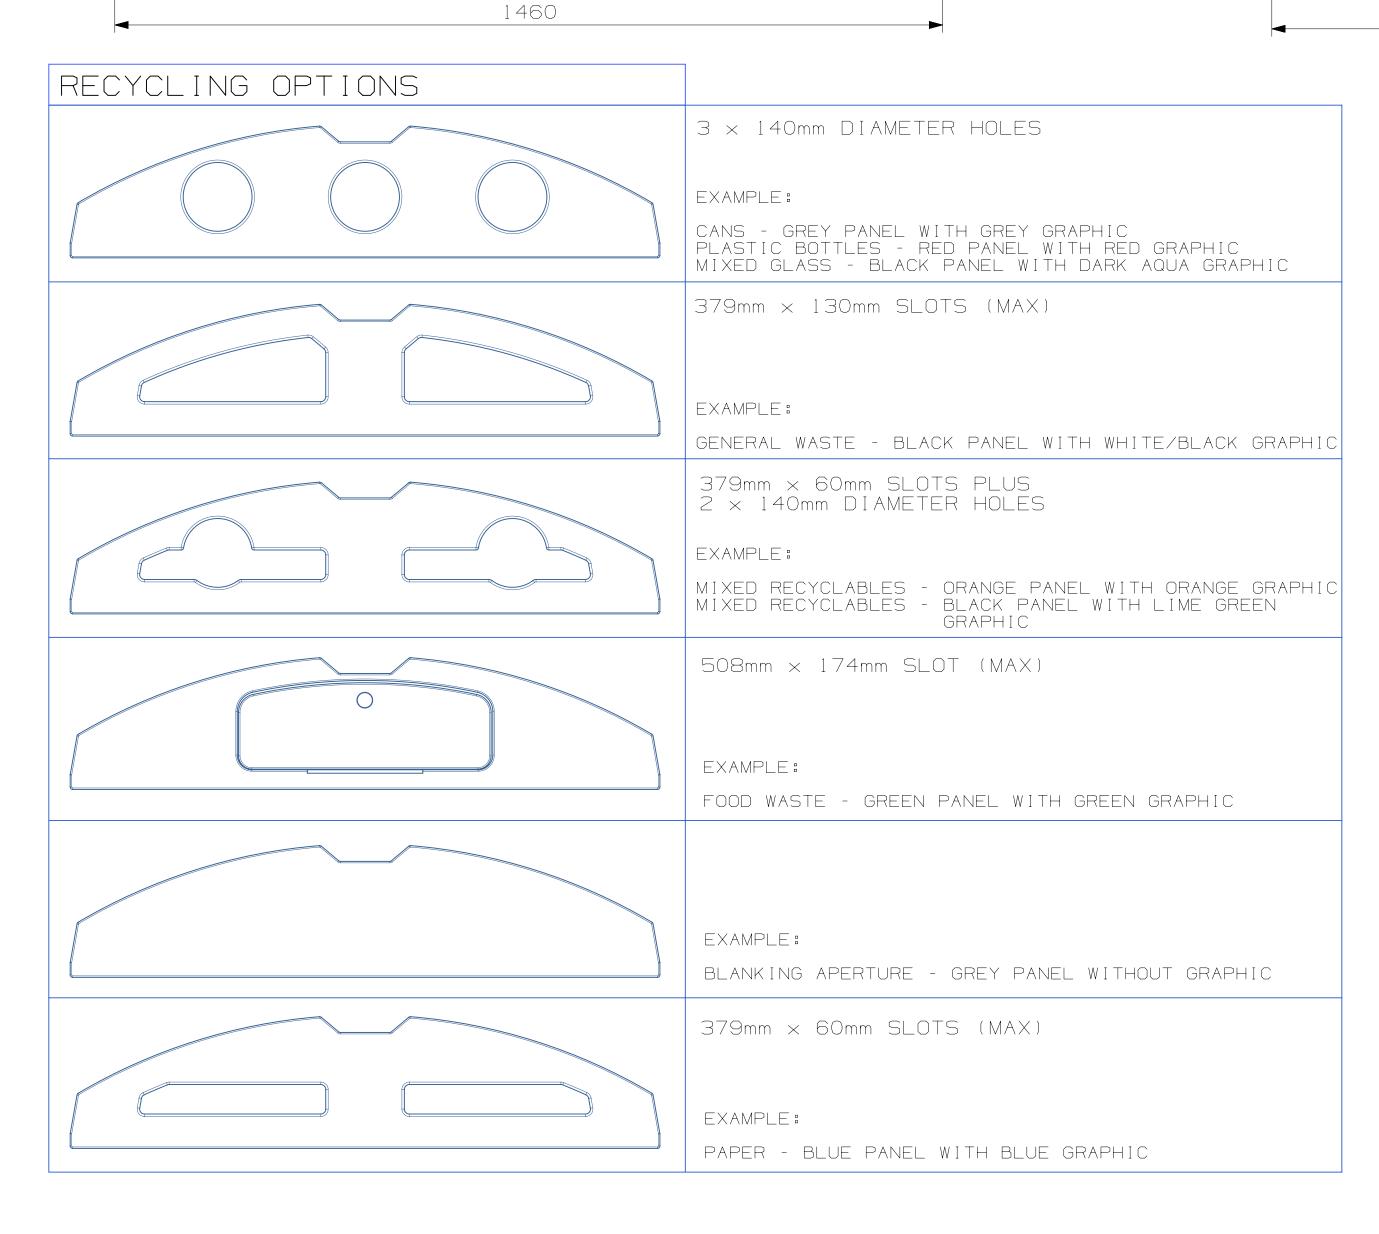

INSTALLATION OPTIONS:

WE RECOMMEND PERMANENT GROUND FIXING BY THE FOLLOWING:

A SOUND CONCRETE FOUNDATION IS THE PREFERRED METHOD.

GROUND FIXING BOLTS (IN EXISTING OR NEW CONCRETE FOUNDATIONS) ALLOW TIME FOR NEW CONCRETE FOUNDATIONS TO CURE. 4 HOLES TO BE DRILLED FOR GROUND FIXING BOLTS 10mm x 130mm (MINIMUM DEPTH) ENSURE HOLES ARE LOCATED AT LEAST 100mm FROM ANY EDGE OF THE CONCRETE FOUNDATION.


TARMAC AND BLOCK PAVING

WHEN INSTALLING ON TARMAC OR BLOCK PAVING, A CONCRETE BASE IS REQUIRED TO PROVIDE SECURE FIXING.

• FLAGSTONES (USING GROUND FIXING BOLTS)

WHEN INSTALLING ON FLAGSTONE OF A MINIMUM 50mm (2") THICK. ENSURE HOLES ARE LOCATED AT LEAST 110mm FROM ANY EDGE OF THE FLAGSTONE.

FOR INCREASED SECURITY, USE A DOUBLE LAYER OF FLAGSTONES BOLTED TOGETHER.

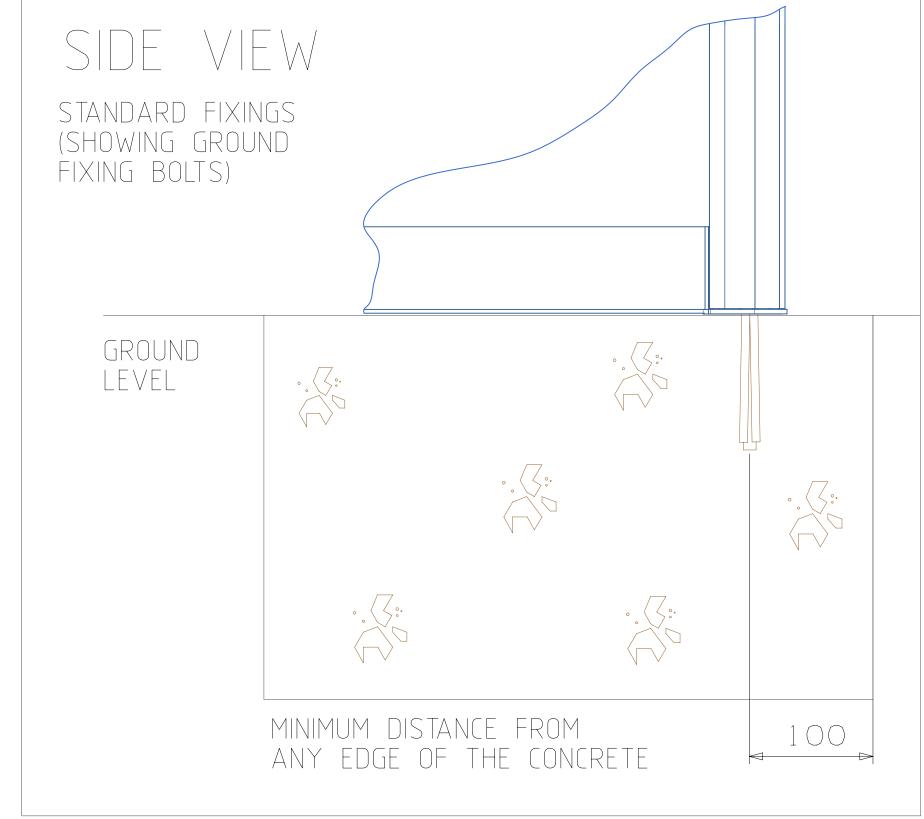

1257



website: www.glasdon.com e-mail: sales@glasdon.com Telephone: 01253 600400

Facsimile of this drawing. is a confidential

disclosure of its contents, and is made on condition that it is neither disclosed

to a third party, nor any item described here in and designed by Glasdon Group Limited.

SPECIFICATION NUMBER - 07S335-S02	ISSUE 01
GLASDON GROUP LTD 27/10/11	SHEET SIZE:A2

is produced either in whole or in part without the written consent of Glasdon Group Limited.