


Aluminium shaft ^{**}


Standard models

DL-1 C




	SSS 1C/1	SSS 1C/2	S Ⓢ 1C/3	S Ⓢ 1C/4	SSS 1C/5	SSS 1C/6	Ⓢ 1C/7	
A	800	800	800	1000	1000	1000	800	Car
B	800	1000	1300	1300	1000	800	1200	
C	1330	1330	1330	1530	1530	1530	1330	Shaft
D	1070	1270	1570	1570	1270	1070	1470	
P	750	750	750	950	950	950	750	Door
Kg	250	250	250	300	250	250	250	Load

DL-1 L




	SSS 1L/1	SSS 1L/2	SSS 1L/3	SSS 1L/4	SSS 1L/5	SSS 1L/6	
A	800	1000	1300	1300	1000	800	Car
B	800	800	800	1000	1000	1000	
C	1250	1450	1700	1700	1450	1250	Shaft
D	1225	1225	1225	1425	1425	1425	
P	750	950	950	950	950	750	Door
Kg	250	250	250	300	250	250	Load

DL-2 A



	SSS 2A/1	SSS 2A/2	SSS 2A/3	SSS 2A/4	SSS 2A/5	SSS 2A/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1290	1290	1290	1490	1490	1490	Shaft
D	1145	1345	1645	1645	1345	1145	
P1	750	750	750	950	950	950	Door
P2	685	750	950	950	750	685	Door
Kg	250	250	250	300	250	250	Load

DL-2 P




	SSS 2P/1	SSS 2P/2	S Ⓢ 2P/3	S Ⓢ 2P/4	SSS 2P/5	SSS 2P/6	Ⓢ 2P/7	
A	800	800	800	1000	1000	1000	800	Car
B	800	1000	1300	1300	1000	800	1200	
C	1330	1330	1330	1540	1545	1530	1330	Shaft
D	1040	1240	1540	1540	1240	1040	1440	
P	750	750	750	950	950	950	750	Door
Kg	250	250	250	300	250	250	250	Load

** Fixing of at least 3 uprights at pit, headroom and each floor level.



DomusLift requires a pit of 100 mm (upon request 55 mm with 2520 mm headroom) or an access ramp. A 2450 mm headroom is enough for a tackle ram system and 2350 mm for telescopic ram.

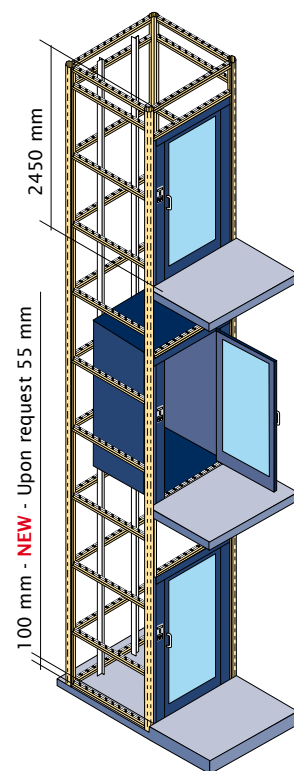

The DomusLift lifting platform complies with the Machinery Directive 2006/42/EC (29 Dec 2009) and with all current requirements.

Accessories:

- fully operational remote control (call, door opening and floor change)
- automatic door opening
- voice synthesiser when stopping at a landing car display
- phone alarm device
- gong (sound signal at landing)



DomusLift® S

Ideal for reduced dimension shafts

The S-Small series allows the installation of a DomusLift even in the narrowest of shafts. The minimum car dimensions up to 580x500mm guarantee the correct space for a trouble free lift.

With elegant and refined aesthetics the following features are standard:

- walls made of an uninterrupted single panel, without aluminium profile;
- wide range of finishes: plastic, painted and stainless steel laminate;
- the same accessory range as the standard model, depending on the reduced dimensions.


Same minimum headroom and pit height.



Measures stated include an edge of about 5 to 10mm for the door side.


Aluminium shaft

DL-1 C




	SSS 1CS1	S 1CS2	
A	800	550	Car
B	800	760	
C	1280	1030	Shaft
D	1020	980	
P	800	550	Door
Kg	250	250	Load

DL-2 P



	SSS 2PS1	S 2PS2	
A	800	550	Car
B	800	780	
C	1280	1030	Shaft
D	1000	980	
P	800	550	Door
Kg	250	250	Load

DL-1 L



	SSS 1LS1	S 1LS2	
A	800	550	Car
B	800	550	
C	1225	975	Shaft
D	1185	935	
P	800	550	Door
Kg	250	250	Load