

KEY PLAN

NOTE
 Floor build-ups may vary depending on the location. Basement and Ground Floor accommodation will have different floor build-up which derives from the u-value and waterproofing requirements. For floor build-ups refer to the drawing: 9000-DRG-11GN-DE001

NOTE
 Putty Pads for electrical sockets / radiator pipe drop detail within Party wall as required.

Timber studs to door opening within partitions.

For access panel detail refer to British Gypsum Standard ceiling Gyproc Proflex access panel details.

Finishes Legend :

External and Separating Wall Lining Types:

Type P3. Independent Wall Lining - Gyplyner IWL at 600mm centres with 1 layer of 15mm British Gypsum Gyproc SoundBloc. Fully filled with unfaced mineral wool with min. density 10kg/m³ between studs. All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration.

Type P3M. As type P3, but with outer layer replaced with 15mm Gyproc SounBloc Moisture Resistant plasterboard ('wet' side).

Type P4. Thermal Lining to existing walls - Gyplyner GL1 at 600mm centres (offset 75mm) (packed with 50mm Kooltherm K12 board - insulation notched where required) with 32.5mm Kooltherm K118 (20mm rigid insulation with 12.5mm Plasterboard with integrated VCL). All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration.

Type P4M. As type P4, but with outer layer replaced with 15mm Gyproc Wallboard Moisture Resistant plasterboard ('wet' side).

Type P5 & P5M. SVP Boxing. 2 no. layers 15mm SoundBloc plasterboard, on 60mm Gyproframe studwork generally to svp casings. All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration. Pipework to be wrapped in 50mm unfaced mineral wool. NB. 15mm Moisture Resistant SoundBloc MR to replace outer layer of boxing in 'Wet' areas (Bathrooms, WCs, Utility Cupboards, Kitchens, etc). Boxings to be fully filled with insulation when adjoining solid party walls.

Type P8. Thermal Independent Wall Lining - Drained cavity wall - Gyplyner IWL at 600mm centres with 1 layer of 15mm British Gypsum Gyproc Wallboard on 92 I studs. Fully filled with unfaced mineral wool. Density 10kg/m³ between studs, cavity All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration.

Type P8M. As type P8, but with outer layer replaced with 15mm Gyproc Wallboard Moisture Resistant plasterboard ('wet' side).

Internal Linings & Boxing Types:

Type P40. Typical Boxing and False Wall - 70mm Gyproframe 'C' studs at max. 600mm centres with 1 layer of 12.5mm British Gypsum Wallboard to one side. All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration.

Type P40M. As type P40 but with the layer of Plasterboard replaced with Gyproc Moisture Resistant plasterboard to 'wet' area.




Type P41. Typical Sacrificial Wall - Gyplyner GL1 with offset of 35mm at 600mm centres (GL2 fixing brackets) with 1 layer of 12.5mm British Gypsum wallboard. All joints to be taped and jointed, giving a smooth and seamless finish, ready for decoration.

Type P41M. As type P41 but with the layer of Plasterboard replaced with Gyproc Moisture Resistant plasterboard to 'wet' area.




Type P45 - Typical Lining to RC, blockwork columns, walls - 12.5mm Gyproc SoundBloc on dabs. All joints to be taped and jointed, giving a smooth and seamless finish ready for decoration.

Type P45M - As type P45 but with outer layer replaced by 12.5mm SoundBloc MR Board on dabs. All joints to be taped and jointed, giving a smooth and seamless finish ready for decoration.


Type P48. Plaster Repair to existing Walls.

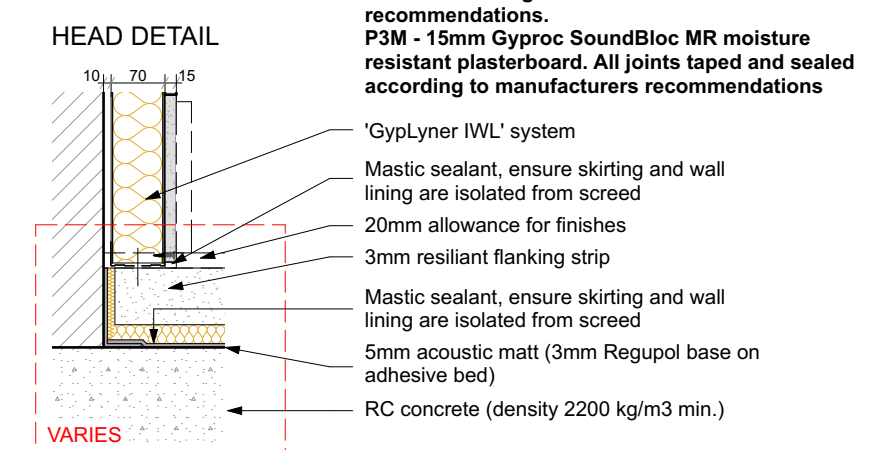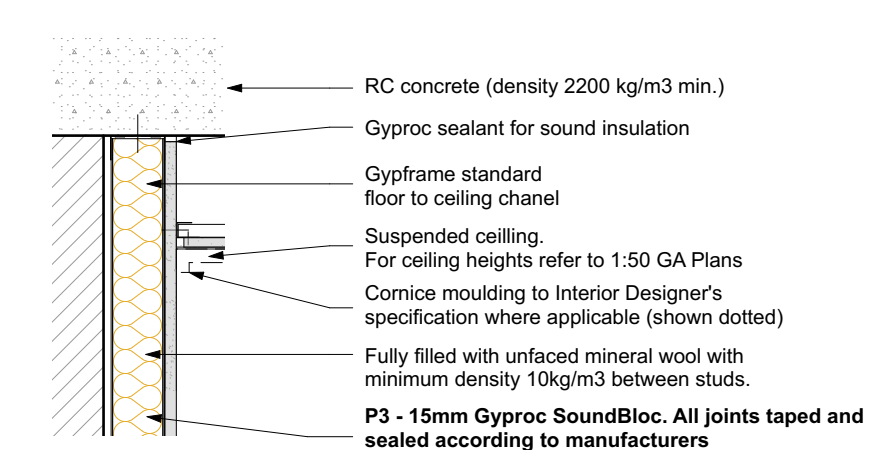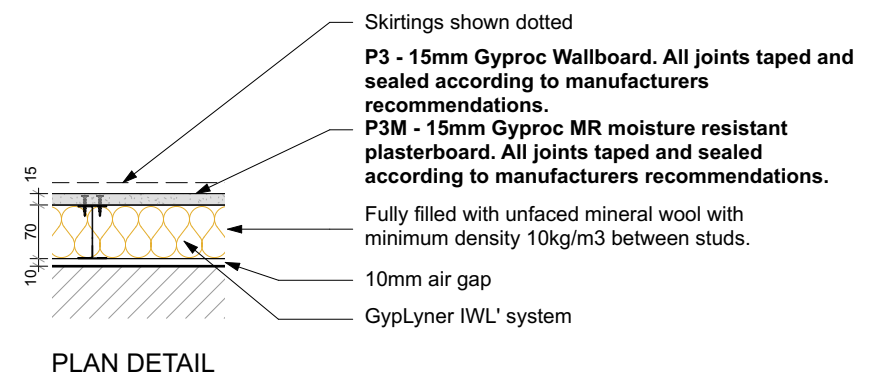




TYPE P3, P3M Independent Wall Lining
 Scale 1:10@A1

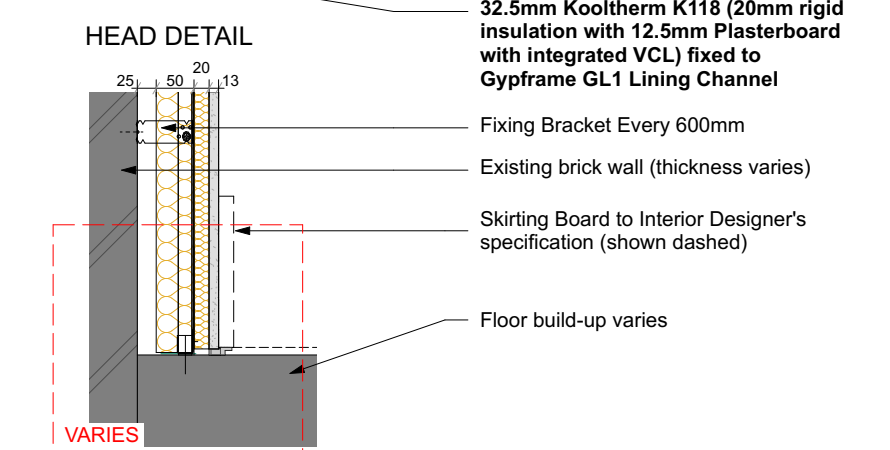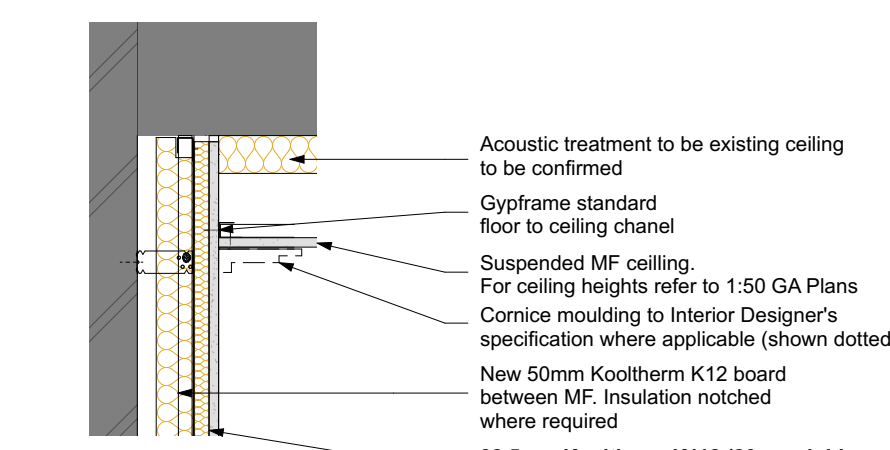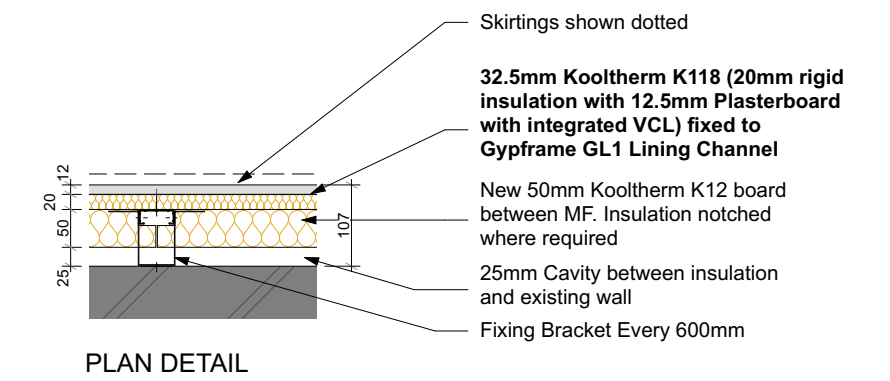




TYPE P4 & P4M Thermal Lining
 Scale 1:10@A1

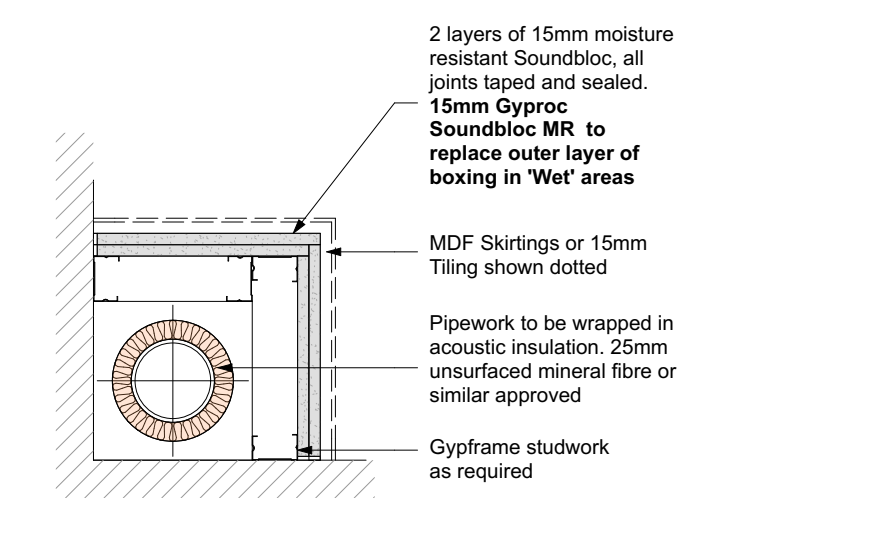




TYPE P5 & P5M SVP Boxing
 Scale 1:10@A1

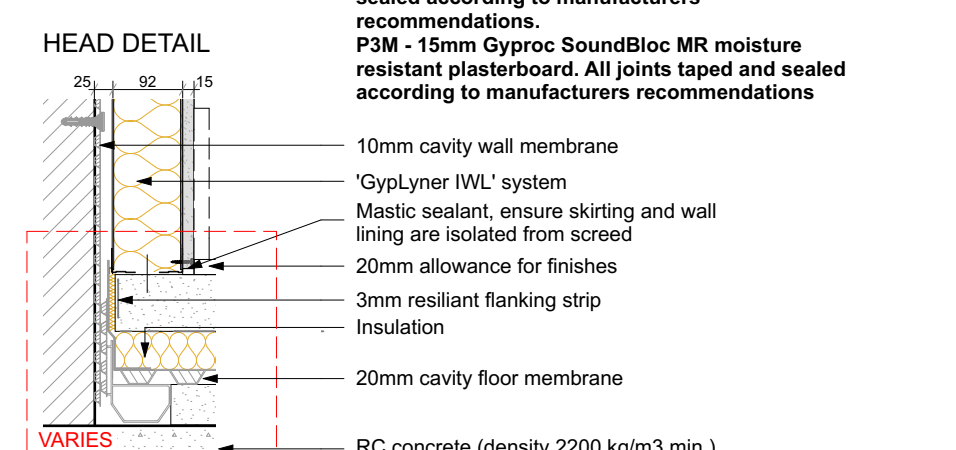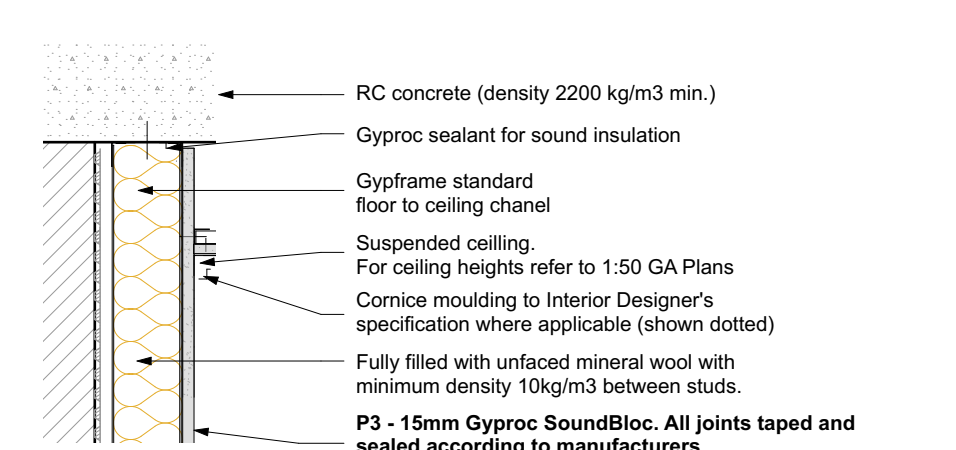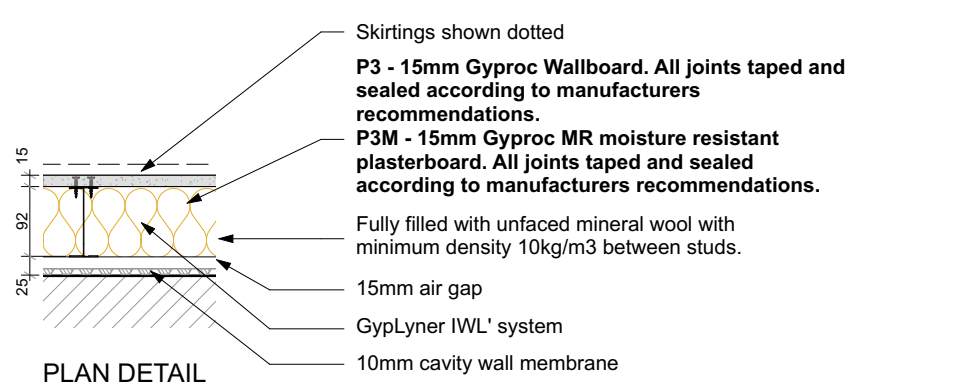




TYPE P8 P8M Independent Wall Lining with Cavity Drain
 Scale 1:10@A1

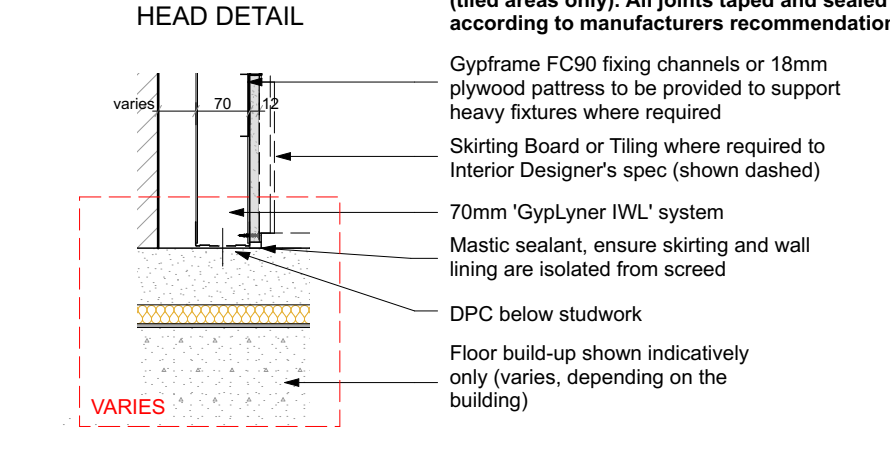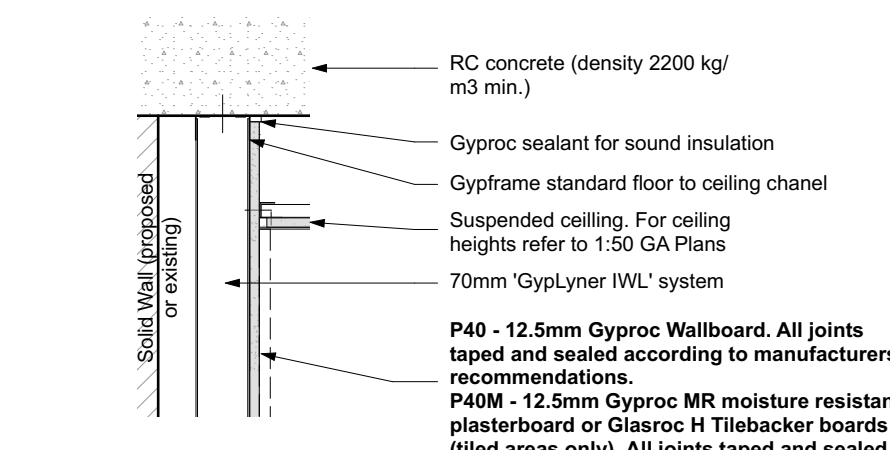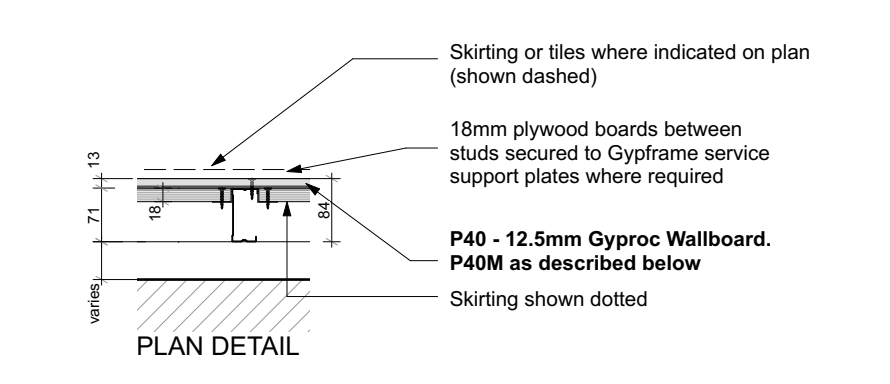

TYPE P40 & P40M To Boxings / False Walls
 Scale 1:10@A1

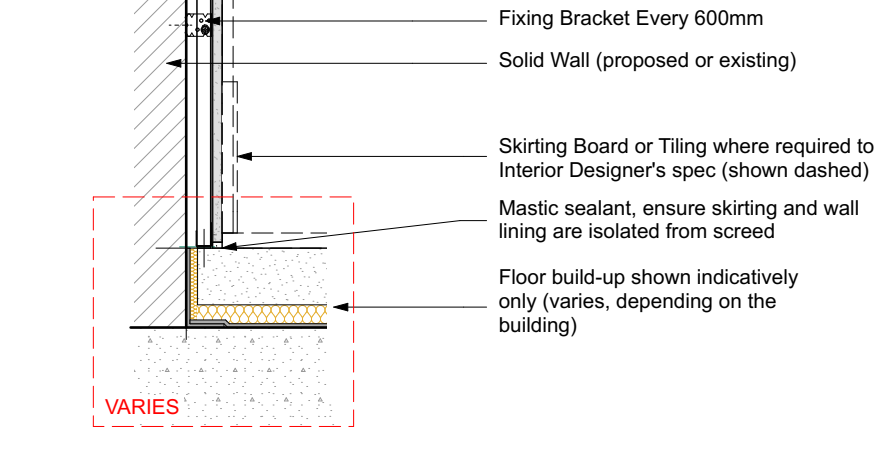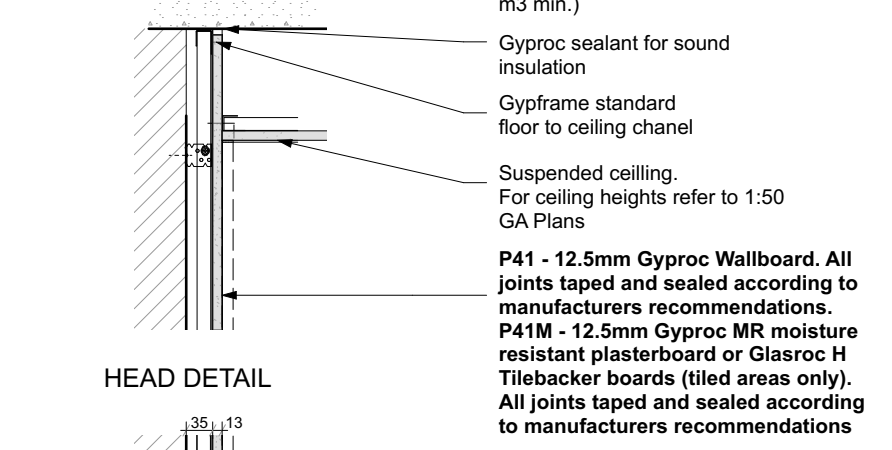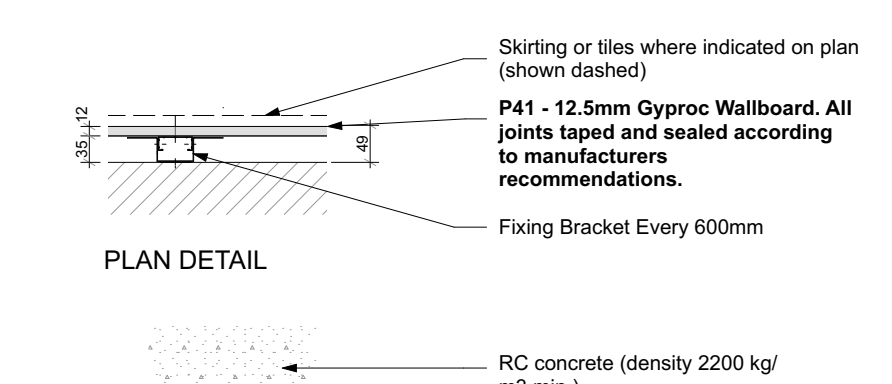

TYPE P41 & P41M Sacrificial Wall
 Scale 1:10@A1

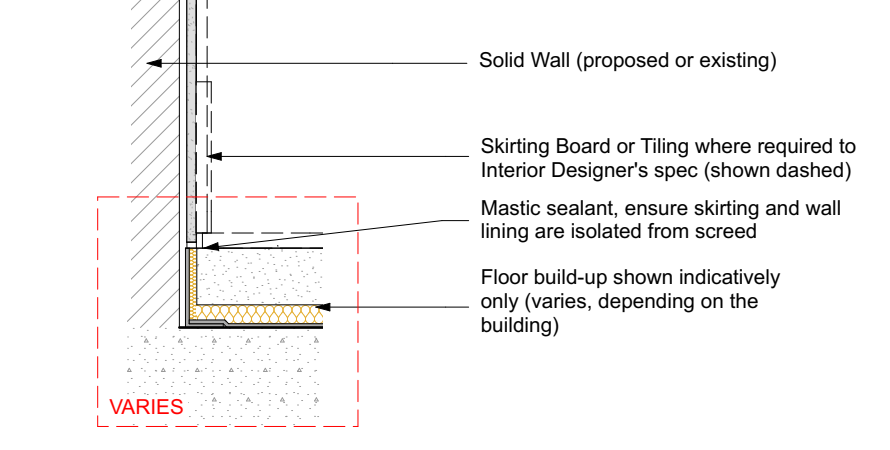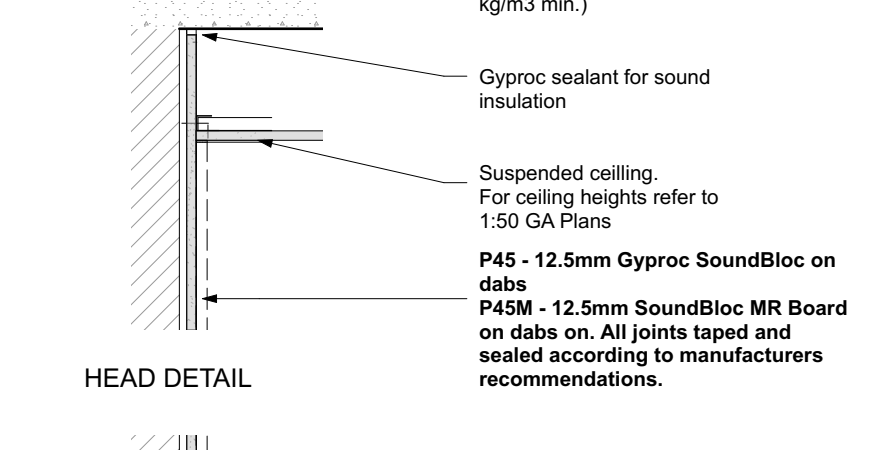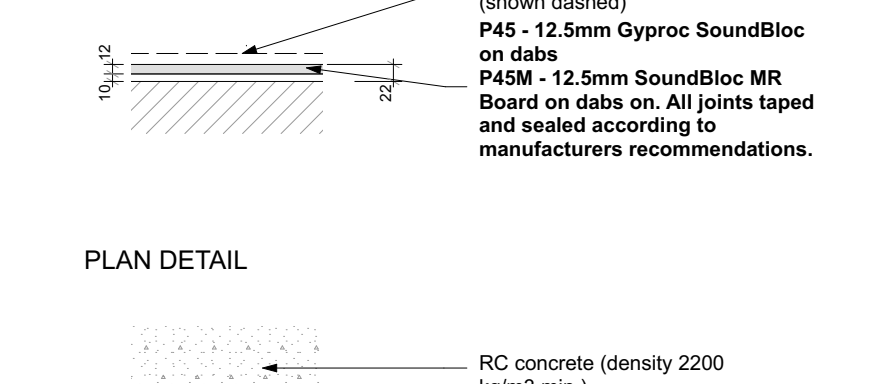

TYPE P45 & P45M Lining to RC, blockwork columns, walls
 Scale 1:10@A1

PLANNING

REVISION	DRN	CHKD	DATE
First Issue	K/C	KC	25/10/2016



PROJECT
KIDDERPORE AVENUE

DRAWING
 Generally Applicable
 Dry Lining Details

SCALE 1:10 @A1 DATE October 2016

DRAWING No. 15 230 DRAWN BY K/C
 9000-DRG-00GN-DE930 REV

A & Q PARTNERSHIP (LONDON) LTD
 THE LUX BUILDING, 2-4 HOXTON SQUARE, LONDON N1 6 NU
 Tel: 020 7613 2244 Fax: 020 7613 2642 Email: london@aqp.co.uk
 ARCHITECTURE DESIGN MASTERPLANNING INTERIORS