

The SAP worksheet output calculations are included as an Appendix to this report.

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 1-1

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	51.85 (1a)	x (2a)	= 134.81 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	51.85 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n)	= 134.81 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+	0	= 0	x 40 = 0 (6a)
Number of open flues	0	+	0	= 0	x 20 = 0 (6b)
Number of intermittent fans				= 0	x 10 = 0 (7a)
Number of passive vents				= 0	x 10 = 0 (7b)
Number of flueless gas fires				= 0	x 40 = 0 (7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =				= 0	÷ (5) = 0 (8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)					
Number of storeys in the dwelling (ns)					
Additional infiltration					
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					

If both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

$(20) = 1 - [0.075 \times (19)] =$

Infiltration rate incorporating shelter factor

$(21) = (18) \times (20) =$

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

Wind Factor (22a)m = (22)m ÷ 4

(22)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			1.26	x1/[1/(1.1)+ 0.04] =	1.33		(27)
Windows Type 2			1.26	x1/[1/(1.1)+ 0.04] =	1.33		(27)
Windows Type 3			2.15	x1/[1/(1.1)+ 0.04] =	2.27		(27)
Windows Type 4			1.41	x 1/[1/(1)+ 0.04] =	1.36		(27)
Windows Type 5			5.6	x 1/[1/(1)+ 0.04] =	5.38		(27)
Walls Type1	13.6	4.67	8.93	x 0.27 =	2.41		(29)
Walls Type2	20.02	7.01	13.01	x 0.13 =	1.69		(29)
Total area of elements, m ²			33.62				(31)

* for windows and roof windows, use effective window U-value calculated using formula 1/[1/U-value)+0.04] as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U)

(26)...(30) + (32) = 15.76 (33)

Heat capacity Cm = S(A x k)

((28)...(30) + (32) + (32a)...(32e) = 307.13 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K

Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K

5.01 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss

(33) + (36) = 20.78 (37)

Ventilation heat loss calculated monthly

(38)m = 0.33 × (25)m x (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	13.74	13.57	13.4	12.57	12.4	11.57	11.57	11.4	11.9	12.4	12.73	13.07

Heat transfer coefficient, W/K

(39)m = (37) + (38)m

(39)m=	34.51	34.34	34.18	33.34	33.18	32.34	32.34	32.17	32.68	33.18	33.51	33.84
Average = Sum(39) _{1...12} /12=	33.3 (39)											

SAP WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m=	0.67	0.66	0.66	0.64	0.64	0.62	0.62	0.62	0.63	0.64	0.65	0.65	
													Average = Sum(40) _{1...12} /12=

0.64

(40)

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(41)m=	31	28	31	30	31	30	31	31	30	31	30	31	

(41)

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

1.74

(42)

$$\text{if TFA} > 13.9, N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)2)] + 0.0013 \times (\text{TFA} - 13.9)$$

$$\text{if TFA} \leq 13.9, N = 1$$

Annual average hot water usage in litres per day Vd,average = (25 x N) + 36

75.64

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)											

(44)m=	83.2	80.17	77.15	74.12	71.1	68.07	68.07	71.1	74.12	77.15	80.17	83.2
	Total = Sum(44) _{1...12} =											

907.62

(44)

Energy content of hot water used - calculated monthly = 4.190 x Vd,m x nm x DTm / 3600 kWh/month (see Tables 1b, 1c, 1d)

(45)m=	123.38	107.91	111.35	97.08	93.15	80.38	74.49	85.47	86.49	100.8	110.03	119.49
	Total = Sum(45) _{1...12} =											

1190.04

(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	18.51	16.19	16.7	14.56	13.97	12.06	11.17	12.82	12.97	15.12	16.5	17.92
	Water storage loss:											

0

(46)

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year

$$(48) \times (49) =$$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

0

(51)

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(52)

If community heating see section 4.3

0

(53)

Volume factor from Table 2a

0

(54)

Temperature factor from Table 2b

0

(55)

Energy lost from water storage, kWh/year

$$(47) \times (51) \times (52) \times (53) =$$

0

(56)

Enter (50) or (54) in (55)

0

(57)

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m)$$

(56)m=

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

(56)

If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) - (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0
	Primary circuit loss (annual) from Table 3											

0

(58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0
	(59)											

SAP WorkSheet: New dwelling design stage

Combi loss calculated for each month (61)m = $(60) \div 365 \times (41)m$

(61)m=	32.92	29.72	32.89	31.81	32.86	31.79	32.84	32.85	31.8	32.88	31.84	32.91		(61)
--------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	--	------

Total heat required for water heating calculated for each month (62)m = $0.85 \times (45)m + (46)m + (57)m + (59)m + (61)m$

(62)m=	156.3	137.63	144.25	128.89	126.01	112.17	107.32	118.33	118.3	133.68	141.87	152.4		(62)
--------	-------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	-------	--	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0		(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Output from water heater

(64)m=	156.3	137.63	144.25	128.89	126.01	112.17	107.32	118.33	118.3	133.68	141.87	152.4		
	Output from water heater (annual) 1...12												1577.15	(64)

Heat gains from water heating, kWh/month 0.25 ' $[0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=	49.25	43.31	45.25	40.23	39.19	34.67	32.98	36.63	36.71	41.74	44.55	47.96		(65)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	104.68	104.68	104.68	104.68	104.68	104.68	104.68	104.68	104.68	104.68	104.68	104.68		(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	34.5	30.65	24.92	18.87	14.1	11.91	12.87	16.72	22.45	28.5	33.27	35.46		(67)
--------	------	-------	-------	-------	------	-------	-------	-------	-------	------	-------	-------	--	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	226.92	229.28	223.34	210.71	194.76	179.78	169.76	167.41	173.34	185.97	201.92	216.91		(68)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	47.21	47.21	47.21	47.21	47.21	47.21	47.21	47.21	47.21	47.21	47.21	47.21		(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3		(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79	-69.79		(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Water heating gains (Table 5)

(72)m=	66.2	64.45	60.82	55.88	52.67	48.16	44.32	49.24	50.99	56.1	61.87	64.46		(72)
--------	------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	--	------

Total internal gains = $(66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m$

(73)m=	412.73	409.48	394.19	370.56	346.64	324.95	312.06	318.48	331.88	355.68	382.16	401.94		(73)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
North	0.9x	0.54	x 1.26	x 10.63	x 0.5	x 0.78 = 2.54
North	0.9x	0.77	x 1.26	x 10.63	x 0.5	x 0.78 = 3.62
North	0.9x	0.77	x 2.15	x 10.63	x 0.5	x 0.81 = 6.42
North	0.9x	0.54	x 1.26	x 20.32	x 0.5	x 0.78 = 4.85
North	0.9x	0.77	x 1.26	x 20.32	x 0.5	x 0.78 = 6.92

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	2.15	x	20.32	x	0.5	x	0.81	=	12.26	(74)
North	0.9x	0.54	x	1.26	x	34.53	x	0.5	x	0.78	=	8.25	(74)
North	0.9x	0.77	x	1.26	x	34.53	x	0.5	x	0.78	=	11.76	(74)
North	0.9x	0.77	x	2.15	x	34.53	x	0.5	x	0.81	=	20.84	(74)
North	0.9x	0.54	x	1.26	x	55.46	x	0.5	x	0.78	=	13.25	(74)
North	0.9x	0.77	x	1.26	x	55.46	x	0.5	x	0.78	=	18.89	(74)
North	0.9x	0.77	x	2.15	x	55.46	x	0.5	x	0.81	=	33.47	(74)
North	0.9x	0.54	x	1.26	x	74.72	x	0.5	x	0.78	=	17.84	(74)
North	0.9x	0.77	x	1.26	x	74.72	x	0.5	x	0.78	=	25.44	(74)
North	0.9x	0.77	x	2.15	x	74.72	x	0.5	x	0.81	=	45.09	(74)
North	0.9x	0.54	x	1.26	x	79.99	x	0.5	x	0.78	=	19.1	(74)
North	0.9x	0.77	x	1.26	x	79.99	x	0.5	x	0.78	=	27.24	(74)
North	0.9x	0.77	x	2.15	x	79.99	x	0.5	x	0.81	=	48.27	(74)
North	0.9x	0.54	x	1.26	x	74.68	x	0.5	x	0.78	=	17.83	(74)
North	0.9x	0.77	x	1.26	x	74.68	x	0.5	x	0.78	=	25.43	(74)
North	0.9x	0.77	x	2.15	x	74.68	x	0.5	x	0.81	=	45.06	(74)
North	0.9x	0.54	x	1.26	x	59.25	x	0.5	x	0.78	=	14.15	(74)
North	0.9x	0.77	x	1.26	x	59.25	x	0.5	x	0.78	=	20.18	(74)
North	0.9x	0.77	x	2.15	x	59.25	x	0.5	x	0.81	=	35.75	(74)
North	0.9x	0.54	x	1.26	x	41.52	x	0.5	x	0.78	=	9.92	(74)
North	0.9x	0.77	x	1.26	x	41.52	x	0.5	x	0.78	=	14.14	(74)
North	0.9x	0.77	x	2.15	x	41.52	x	0.5	x	0.81	=	25.05	(74)
North	0.9x	0.54	x	1.26	x	24.19	x	0.5	x	0.78	=	5.78	(74)
North	0.9x	0.77	x	1.26	x	24.19	x	0.5	x	0.78	=	8.24	(74)
North	0.9x	0.77	x	2.15	x	24.19	x	0.5	x	0.81	=	14.6	(74)
North	0.9x	0.54	x	1.26	x	13.12	x	0.5	x	0.78	=	3.13	(74)
North	0.9x	0.77	x	1.26	x	13.12	x	0.5	x	0.78	=	4.47	(74)
North	0.9x	0.77	x	2.15	x	13.12	x	0.5	x	0.81	=	7.92	(74)
North	0.9x	0.54	x	1.26	x	8.86	x	0.5	x	0.78	=	2.12	(74)
North	0.9x	0.77	x	1.26	x	8.86	x	0.5	x	0.78	=	3.02	(74)
North	0.9x	0.77	x	2.15	x	8.86	x	0.5	x	0.81	=	5.35	(74)
South	0.9x	0.54	x	1.41	x	46.75	x	0.5	x	0.7	=	11.21	(78)
South	0.9x	0.54	x	1.41	x	76.57	x	0.5	x	0.7	=	18.36	(78)
South	0.9x	0.54	x	1.41	x	97.53	x	0.5	x	0.7	=	23.39	(78)
South	0.9x	0.54	x	1.41	x	110.23	x	0.5	x	0.7	=	26.44	(78)
South	0.9x	0.54	x	1.41	x	114.87	x	0.5	x	0.7	=	27.55	(78)
South	0.9x	0.54	x	1.41	x	110.55	x	0.5	x	0.7	=	26.51	(78)
South	0.9x	0.54	x	1.41	x	108.01	x	0.5	x	0.7	=	25.91	(78)
South	0.9x	0.54	x	1.41	x	104.89	x	0.5	x	0.7	=	25.16	(78)
South	0.9x	0.54	x	1.41	x	101.89	x	0.5	x	0.7	=	24.44	(78)
South	0.9x	0.54	x	1.41	x	82.59	x	0.5	x	0.7	=	19.81	(78)

SAP WorkSheet: New dwelling design stage

South	0.9x	0.54	x	1.41	x	55.42	x	0.5	x	0.7	=	13.29	(78)
South	0.9x	0.54	x	1.41	x	40.4	x	0.5	x	0.7	=	9.69	(78)
Southwest	0.9x	0.54	x	5.6	x	36.79		0.5	x	0.73	=	36.55	(79)
Southwest	0.9x	0.54	x	5.6	x	62.67		0.5	x	0.73	=	62.26	(79)
Southwest	0.9x	0.54	x	5.6	x	85.75		0.5	x	0.73	=	85.19	(79)
Southwest	0.9x	0.54	x	5.6	x	106.25		0.5	x	0.73	=	105.55	(79)
Southwest	0.9x	0.54	x	5.6	x	119.01		0.5	x	0.73	=	118.22	(79)
Southwest	0.9x	0.54	x	5.6	x	118.15		0.5	x	0.73	=	117.37	(79)
Southwest	0.9x	0.54	x	5.6	x	113.91		0.5	x	0.73	=	113.16	(79)
Southwest	0.9x	0.54	x	5.6	x	104.39		0.5	x	0.73	=	103.7	(79)
Southwest	0.9x	0.54	x	5.6	x	92.85		0.5	x	0.73	=	92.24	(79)
Southwest	0.9x	0.54	x	5.6	x	69.27		0.5	x	0.73	=	68.81	(79)
Southwest	0.9x	0.54	x	5.6	x	44.07		0.5	x	0.73	=	43.78	(79)
Southwest	0.9x	0.54	x	5.6	x	31.49		0.5	x	0.73	=	31.28	(79)

Solar gains in watts, calculated for each month

(83)m = Sum(74)m ... (82)m

(83)m =	60.34	104.66	149.42	197.59	234.15	238.49	227.39	198.93	165.78	117.23	72.59	51.45	(83)
---------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	-------	------

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m =	473.07	514.14	543.61	568.15	580.79	563.43	539.45	517.41	497.66	472.91	454.75	453.39	(84)
---------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	(86)
0.86	0.82	0.75	0.64	0.51	0.36	0.26	0.28	0.44	0.66	0.8	0.87	

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m =	20.3	20.45	20.64	20.84	20.95	20.99	21	21	20.98	20.85	20.58	20.28	(87)
---------	------	-------	-------	-------	-------	-------	----	----	-------	-------	-------	-------	------

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m =	20.37	20.37	20.38	20.39	20.39	20.41	20.41	20.41	20.4	20.39	20.39	20.38	(88)
---------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	------

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m =	0.85	0.8	0.73	0.62	0.48	0.33	0.23	0.25	0.41	0.63	0.79	0.86	(89)
---------	------	-----	------	------	------	------	------	------	------	------	------	------	------

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m =	19.74	19.89	20.07	20.26	20.35	20.4	20.41	20.41	20.39	20.28	20.02	19.73	(90)
---------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	------

fLA = Living area ÷ (4) =

0.54

(91)

Mean internal temperature (for the whole dwelling) = fLA × T1 + (1 – fLA) × T2

(92)m =	20.04	20.19	20.38	20.57	20.67	20.72	20.73	20.73	20.7	20.59	20.32	20.02	(92)
---------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m =	20.04	20.19	20.38	20.57	20.67	20.72	20.73	20.73	20.7	20.59	20.32	20.02	(93)
---------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	------

8. Space heating requirement

Set Ti to the mean internal temperature obtained at step 11 of Table 9b, so that $Ti,m = (76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, hm:

(94)m =	0.84	0.8	0.73	0.63	0.49	0.35	0.25	0.27	0.42	0.64	0.78	0.85	(94)
---------	------	-----	------	------	------	------	------	------	------	------	------	------	------

SAP WorkSheet: New dwelling design stage

Useful gains, hmGm , W = (94)m x (84)m

(95)m=	398.22	411.21	399.53	355.64	286.5	195.85	133.03	138.64	211.18	301.26	356.54	387.03		(95)
--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, Lm , W = [(39)m x [(93)m – (96)m]

(97)m=	543.21	525.17	474.29	389.18	297.67	197.88	133.42	139.19	215.8	331.36	443.11	535.56		(97)
--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--	------

Space heating requirement for each month, kWh/month = 0.024 x [(97)m – (95)m] x (41)m

(98)m=	107.87	76.58	55.62	24.15	8.31	0	0	0	0	22.4	62.33	110.51		
--------	--------	-------	-------	-------	------	---	---	---	---	------	-------	--------	--	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1,5,9...12} = 467.77 \quad (98)$$

Space heating requirement in kWh/m²/year

$$9.02 \quad (99)$$

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system

$$0 \quad (201)$$

Fraction of space heat from main system(s)

$$(202) = 1 - (201) = 1 \quad (202)$$

Fraction of total heating from main system 1


$$(204) = (202) \times [1 - (203)] = 1 \quad (204)$$

Efficiency of main space heating system 1

$$90.5 \quad (206)$$

Efficiency of secondary/supplementary heating system, %

$$0 \quad (208)$$

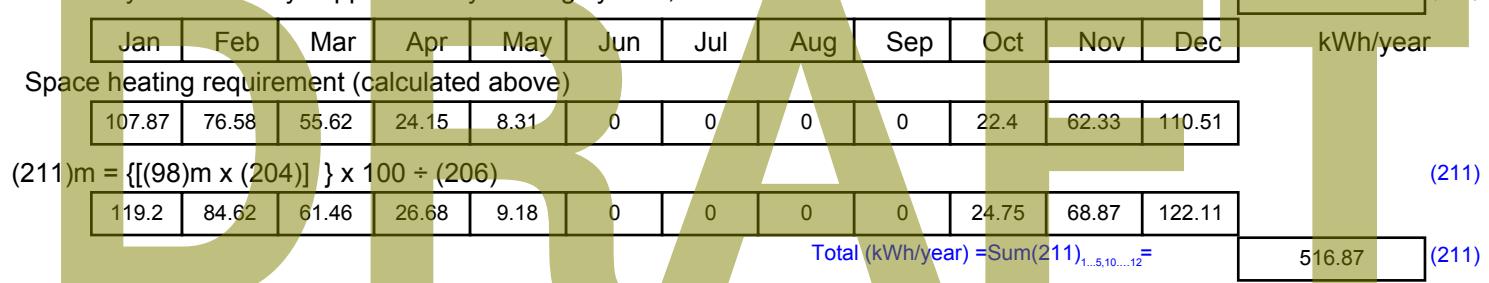

Space heating fuel (secondary), kWh/month

= {[(98)m x (201) } x 100 ÷ (208)	0	0	0	0	0	0	0	0	0	0	0	0		(215)
------------------------------------	---	---	---	---	---	---	---	---	---	---	---	---	--	-------

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1,5,10...12} = 0 \quad (215)$$

Water heating

Output from water heater (calculated above)

$$156.3 \quad 137.63 \quad 144.25 \quad 128.89 \quad 126.01 \quad 112.17 \quad 107.32 \quad 118.33 \quad 118.3 \quad 133.68 \quad 141.87 \quad 152.4 \quad 86.6 \quad (216)$$

Efficiency of water heater

(217)m=	88.15	87.96	87.65	87.19	86.83	86.6	86.6	86.6	86.6	87.14	87.75	88.2		(217)
---------	-------	-------	-------	-------	-------	------	------	------	------	-------	-------	------	--	-------

Fuel for water heating, kWh/month

(219)m = (64)m x 100 ÷ (217)m	177.31	156.48	164.57	147.83	145.12	129.52	123.93	136.63	136.6	153.41	161.67	172.8		(219)
-------------------------------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	-------	--	-------

$$\text{Total} = \text{Sum}(219a)_{1,5,10...12} = 1805.87 \quad (219)$$

Annual totals

Space heating fuel used, main system 1

$$\text{kWh/year} \quad 516.87$$

Water heating fuel used

$$1805.87$$

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

$$127.46 \quad (230a)$$

SAP WorkSheet: New dwelling design stage

central heating pump:		30	(230c)
boiler with a fan-assisted flue		45	(230e)
Total electricity for the above, kWh/year	sum of (230a)...(230g) =	202.46	(231)
Electricity for lighting		243.74	(232)
Electricity generated by PVs		-276.36	(233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	x 0.01 = 17.99 (240)
Space heating - main system 2	(213) x	0	x 0.01 = 0 (241)
Space heating - secondary	(215) x	13.19	x 0.01 = 0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 62.84 (247)
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 26.7 (249)

(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)

Energy for lighting	(232)	13.19	x 0.01 = 32.15 (250)
---------------------	-------	-------	----------------------

Additional standing charges (Table 12)

one of (233) to (235) x	13.19	x 0.01 = 0 (252)
		120 (251)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost	(245)…(247) + (250)…(254) =	259.69 (255)
--------------------------	-----------------------------	--------------

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)		0.42 (256)
Energy cost factor (ECF)	[(255) x (256)] ÷ [(4) + 45.0] =	1.13 (257)
SAP rating (Section 12)		84.29 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 111.64 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 390.07 (264)
Space and water heating	(261) + (262) + (263) + (264) =		501.71 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 105.08 (267)
Electricity for lighting	(232) x	0.519	= 126.5 (268)
Energy saving/generation technologies			
Item 1		0.519	= -143.43 (269)
Total CO2, kg/year	sum of (265)…(271) =		589.86 (272)
CO2 emissions per m²	(272) ÷ (4) =		11.38 (273)

SAP WorkSheet: New dwelling design stage

EI rating (section 14)

92

(274)

13a. Primary Energy

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 630.58 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2203.16 (264)
Space and water heating	(261) + (262) + (263) + (264) =		2833.74 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 621.56 (267)
Electricity for lighting	(232) x	0	= 748.28 (268)
Energy saving/generation technologies			
Item 1		3.07	= -848.42 (269)
'Total Primary Energy		sum of (265)...(271) =	3355.16 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =	64.71 (273)

DRAFT

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 1-2

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	48.33 (1a)	x (2a)	= 125.66 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	48.33 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n)	= 125.66 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+ 0	+ 0	= 0	x 40 = 0 (6a)
Number of open flues	0	+ 0	+ 0	= 0	x 20 = 0 (6b)
Number of intermittent fans				= 0	x 10 = 0 (7a)
Number of passive vents				= 0	x 10 = 0 (7b)
Number of flueless gas fires				= 0	x 40 = 0 (7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) = 0				÷ (5) = 0	(8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)					
Number of storeys in the dwelling (ns)					[(9)-1]x0.1 = 0 (9)
Additional infiltration					0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					0 (11)

If both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area

If based on air permeability value, then (18) = [(17) ÷ 20]+(8), otherwise (18) = (16)

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

(20) = 1 - [0.075 x (19)] =

Infiltration rate incorporating shelter factor

(21) = (18) x (20) =

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Monthly average wind speed from Table 7

(22)m= 5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7
------------	---	-----	-----	-----	-----	-----	-----	---	-----	-----	-----

Wind Factor (22a)m = (22)m ÷ 4

(22a)m= 1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
--------------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			2.15	x1/[1/(1.1)+ 0.04] =	2.27		
Windows Type 2			1.83	x1/[1/(1.1)+ 0.04] =	1.93		
Windows Type 3			1.83	x1/[1/(1.1)+ 0.04] =	1.93		
Walls	20.28	5.81	14.47	x 0.27 =	3.91		
Total area of elements, m ²			20.28				

* for windows and roof windows, use effective window U-value calculated using formula $1/[(1/U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) = 10.03 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) = 202.58 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 3 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss (33) + (36) = 13.02 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m × (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	12.8	12.65	12.49	11.71	11.56	10.78	10.78	10.63	11.09	11.56	11.87	12.18

Heat transfer coefficient, W/K (39)m = (37) + (38)m Average = Sum(39)_{1...12}/12= 24.7 (39)

(39)m= 25.83 25.67 25.52 24.74 24.58 23.81 23.81 23.65 24.12 24.58 24.89 25.2

Average = Sum(39)_{1...12}/12= 24.7 (39)

Heat loss parameter (HLP), W/m²K (40)m = (39)m ÷ (4)

(40)m=	0.53	0.53	0.53	0.51	0.51	0.49	0.49	0.49	0.5	0.51	0.52	0.52
--------	------	------	------	------	------	------	------	------	-----	------	------	------

Average = Sum(40)_{1...12}/12= 0.51 (40)

SAP WorkSheet: New dwelling design stage

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(41)m= 31	28	31	30	31	30	31	31	30	31	30	31	(41)

4. Water heating energy requirement: kWh/year:

Assumed occupancy, N 1.64 (42)
 if TFA > 13.9, $N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$
 if TFA £ 13.9, $N = 1$

Annual average hot water usage in litres per day $Vd,\text{average} = (25 \times N) + 36$ 73.18 (43)
Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Hot water usage in litres per day for each month $Vd,m = \text{factor from Table 1c } x (43)$

(44)m= 80.49	77.57	74.64	71.71	68.78	65.86	65.86	68.78	71.71	74.64	77.57	80.49	Total = Sum(44) _{1...12} = 878.1 (44)
--------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--

Energy content of hot water used - calculated monthly = $4.190 \times Vd,m \times nm \times DTm / 3600 \text{ kWh/month}$ (see Tables 1b, 1c, 1d)

(45)m= 119.37	104.4	107.73	93.92	90.12	77.77	72.06	82.69	83.68	97.52	106.45	115.6	Total = Sum(45) _{1...12} = 1151.33 (45)
---------------	-------	--------	-------	-------	-------	-------	-------	-------	-------	--------	-------	--

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m= 17.91	15.66	16.16	14.09	13.52	11.67	10.81	12.4	12.55	14.63	15.97	17.34	
--------------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	--

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel 0 (47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day): 0 (48)

Temperature factor from Table 2b 0 (49)

Energy lost from water storage, kWh/year 0 (48) x (49) = (50)

b) If manufacturer's declared cylinder loss factor is not known: 0 (51)

Hot water storage loss factor from Table 2 (kWh/litre/day) 0 (51)

If community heating see section 4.3 0 (52)

Volume factor from Table 2a 0 (52)

Temperature factor from Table 2b 0 (53)

Energy lost from water storage, kWh/year 0 (47) x (51) x (52) x (53) = (54)

Enter (50) or (54) in (55) 0 (55)

Water storage loss calculated for each month 0 ((56)m = (55) x (41)m) (56)

(56)m= 0	0	0	0	0	0	0	0	0	0	0	0	0
----------	---	---	---	---	---	---	---	---	---	---	---	---

If cylinder contains dedicated solar storage, $(57)m = (56)m \times [(50) - (H11)] \div (50)$, else $(57)m = (56)m$ where (H11) is from Appendix H 0 (57)

(57)m= 0	0	0	0	0	0	0	0	0	0	0	0	0
----------	---	---	---	---	---	---	---	---	---	---	---	---

Primary circuit loss (annual) from Table 3 0 (58)

Primary circuit loss calculated for each month $(59)m = (58) \div 365 \times (41)m$ 0 (59)

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat) 0 (59)

(59)m= 0	0	0	0	0	0	0	0	0	0	0	0	0
----------	---	---	---	---	---	---	---	---	---	---	---	---

Combi loss calculated for each month $(61)m = (60) \div 365 \times (41)m$ 0 (61)

(61)m= 32.91	29.71	32.88	31.81	32.85	31.78	32.83	32.85	31.79	32.87	31.83	32.9
--------------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

SAP WorkSheet: New dwelling design stage

Total heat required for water heating calculated for each month (62)m = $0.85 \times (45)m + (46)m + (57)m + (59)m + (61)m$

(62)m=	152.28	134.11	140.61	125.73	122.98	109.55	104.89	115.54	115.48	130.39	138.28	148.51	(62)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRS and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0	(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Output from water heater

(64)m=	152.28	134.11	140.61	125.73	122.98	109.55	104.89	115.54	115.48	130.39	138.28	148.51	
	Output from water heater (annual) 1...12											1538.35	(64)

Heat gains from water heating, kWh/month $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=	47.92	42.14	44.04	39.18	38.18	33.8	32.17	35.71	35.77	40.64	43.35	46.66	(65)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	98.46	98.46	98.46	98.46	98.46	98.46	98.46	98.46	98.46	98.46	98.46	98.46	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	35.3	31.35	25.5	19.3	14.43	12.18	13.16	17.11	22.97	29.16	34.03	36.28	(67)
--------	------	-------	------	------	-------	-------	-------	-------	-------	-------	-------	-------	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	213.28	215.49	209.92	198.04	183.06	168.97	159.56	157.35	162.92	174.8	189.78	203.87	(68)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	46.49	46.49	46.49	46.49	46.49	46.49	46.49	46.49	46.49	46.49	46.49	46.49	(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3	(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	-65.64	(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Water heating gains (Table 5)

(72)m=	64.4	62.71	59.2	54.42	51.32	46.95	43.24	47.99	49.68	54.63	60.21	62.72	(72)
--------	------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Total internal gains = $(66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m$

(73)m=	395.29	391.87	376.92	354.07	331.11	310.41	298.27	304.76	317.88	340.89	366.34	385.18	(73)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_	FF Table 6c	Gains (W)						
North	0.9x	0.77	x	2.15	x	10.63	0.5	x	0.81	=	6.42	(74)
North	0.9x	0.77	x	1.83	x	10.63	0.5	x	0.8	=	5.39	(74)
North	0.9x	0.77	x	1.83	x	10.63	0.5	x	0.8	=	5.39	(74)
North	0.9x	0.77	x	2.15	x	20.32	0.5	x	0.81	=	12.26	(74)
North	0.9x	0.77	x	1.83	x	20.32	0.5	x	0.8	=	10.31	(74)
North	0.9x	0.77	x	1.83	x	20.32	0.5	x	0.8	=	10.31	(74)
North	0.9x	0.77	x	2.15	x	34.53	0.5	x	0.81	=	20.84	(74)
North	0.9x	0.77	x	1.83	x	34.53	0.5	x	0.8	=	17.52	(74)

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	1.83	x	34.53	x	0.5	x	0.8	=	17.52	(74)
North	0.9x	0.77	x	2.15	x	55.46	x	0.5	x	0.81	=	33.47	(74)
North	0.9x	0.77	x	1.83	x	55.46	x	0.5	x	0.8	=	28.14	(74)
North	0.9x	0.77	x	1.83	x	55.46	x	0.5	x	0.8	=	28.14	(74)
North	0.9x	0.77	x	2.15	x	74.72	x	0.5	x	0.81	=	45.09	(74)
North	0.9x	0.77	x	1.83	x	74.72	x	0.5	x	0.8	=	37.9	(74)
North	0.9x	0.77	x	1.83	x	74.72	x	0.5	x	0.8	=	37.9	(74)
North	0.9x	0.77	x	2.15	x	79.99	x	0.5	x	0.81	=	48.27	(74)
North	0.9x	0.77	x	1.83	x	79.99	x	0.5	x	0.8	=	40.57	(74)
North	0.9x	0.77	x	1.83	x	79.99	x	0.5	x	0.8	=	40.57	(74)
North	0.9x	0.77	x	2.15	x	74.68	x	0.5	x	0.81	=	45.06	(74)
North	0.9x	0.77	x	1.83	x	74.68	x	0.5	x	0.8	=	37.88	(74)
North	0.9x	0.77	x	1.83	x	74.68	x	0.5	x	0.8	=	37.88	(74)
North	0.9x	0.77	x	2.15	x	59.25	x	0.5	x	0.81	=	35.75	(74)
North	0.9x	0.77	x	1.83	x	59.25	x	0.5	x	0.8	=	30.05	(74)
North	0.9x	0.77	x	1.83	x	59.25	x	0.5	x	0.8	=	30.05	(74)
North	0.9x	0.77	x	2.15	x	41.52	x	0.5	x	0.81	=	25.05	(74)
North	0.9x	0.77	x	1.83	x	41.52	x	0.5	x	0.8	=	21.06	(74)
North	0.9x	0.77	x	1.83	x	41.52	x	0.5	x	0.8	=	21.06	(74)
North	0.9x	0.77	x	2.15	x	24.19	x	0.5	x	0.81	=	14.6	(74)
North	0.9x	0.77	x	1.83	x	24.19	x	0.5	x	0.8	=	12.27	(74)
North	0.9x	0.77	x	1.83	x	24.19	x	0.5	x	0.8	=	12.27	(74)
North	0.9x	0.77	x	2.15	x	13.12	x	0.5	x	0.81	=	7.92	(74)
North	0.9x	0.77	x	1.83	x	13.12	x	0.5	x	0.8	=	6.65	(74)
North	0.9x	0.77	x	1.83	x	13.12	x	0.5	x	0.8	=	6.65	(74)
North	0.9x	0.77	x	1.83	x	13.12	x	0.5	x	0.8	=	6.65	(74)
North	0.9x	0.77	x	2.15	x	8.86	x	0.5	x	0.81	=	5.35	(74)
North	0.9x	0.77	x	1.83	x	8.86	x	0.5	x	0.8	=	4.5	(74)
North	0.9x	0.77	x	1.83	x	8.86	x	0.5	x	0.8	=	4.5	(74)

Solar gains in watts, calculated for each month

(83)m = Sum(74)m ... (82)m

(83)m= 17.2 32.88 55.87 89.74 120.89 129.41 120.83 95.86 67.17 39.14 21.22 14.34 (83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m= 412.5 424.75 432.79 443.81 452 439.82 419.09 400.62 385.05 380.03 387.56 399.52 (84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21

(85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		(86)
(86)m= 0.83	0.81	0.75	0.63	0.49	0.34	0.25	0.27	0.43	0.63	0.77	0.84		(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m= 20.59 20.67 20.78 20.92 20.98 21 21 21 20.99 20.93 20.78 20.59 (87)

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m= 20.49 20.49 20.5 20.51 20.51 20.53 20.53 20.53 20.52 20.51 20.51 20.5 (88)

SAP WorkSheet: New dwelling design stage

Utilisation factor for gains for rest of dwelling, h_{2,m} (see Table 9a)

(89)m=	0.82	0.79	0.73	0.61	0.47	0.32	0.22	0.24	0.4	0.61	0.76	0.83		(89)
--------	------	------	------	------	------	------	------	------	-----	------	------	------	--	------

Mean internal temperature in the rest of dwelling T₂ (follow steps 3 to 7 in Table 9c)

(90)m=	20.12	20.19	20.31	20.44	20.49	20.53	20.53	20.53	20.52	20.46	20.31	20.13		(90)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

$$f_{LA} = \text{Living area} \div (4) = 0.51$$

Mean internal temperature (for the whole dwelling) = f_{LA} × T₁ + (1 – f_{LA}) × T₂

(92)m=	20.36	20.43	20.55	20.68	20.74	20.76	20.77	20.77	20.76	20.7	20.55	20.36		(92)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	--	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	20.36	20.43	20.55	20.68	20.74	20.76	20.77	20.77	20.76	20.7	20.55	20.36		(93)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	--	------

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that T_{i,m}=(76)m and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, h_m:

(94)m=	0.82	0.79	0.73	0.62	0.48	0.33	0.24	0.26	0.41	0.62	0.76	0.83		(94)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------

Useful gains, h_{mGm}, W = (94)m × (84)m

(95)m=	337.94	335.98	317.69	275.61	217.95	146.23	99.12	103.19	159.02	235.08	293.18	330.7		(95)
--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	-------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, L_m, W = [(39)m × [(93)m – (96)m]]

(97)m=	414.75	398.77	358.46	291.45	222.22	146.76	99.2	103.31	160.54	248.19	334.78	407.38		(97)
--------	--------	--------	--------	--------	--------	--------	------	--------	--------	--------	--------	--------	--	------

Space heating requirement for each month, kWh/month = 0.024 × [(97)m – (95)m] × (41)m

(98)m=	57.15	42.19	30.33	11.41	3.17	0	0	0	0	9.75	29.96	57.05		
--------	-------	-------	-------	-------	------	---	---	---	---	------	-------	-------	--	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1...5,9...12} = 241.01$$

Space heating requirement in kWh/m²/year

$$4.99$$

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system

$$0$$

$$(201)$$

Fraction of space heat from main system(s)

$$(202) = 1 - (201) = 1$$

$$(202)$$

Fraction of total heating from main system 1

$$(204) = (202) \times [1 - (203)] = 1$$

$$(204)$$

Efficiency of main space heating system 1

$$90.5$$

$$(206)$$

Efficiency of secondary/supplementary heating system, %

$$0$$

$$(208)$$

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

57.15	42.19	30.33	11.41	3.17	0	0	0	0	9.75	29.96	57.05	
-------	-------	-------	-------	------	---	---	---	---	------	-------	-------	--

$$(211)m = \{[(98)m \times (204)]\} \times 100 \div (206) = 266.31$$

63.14	46.62	33.52	12.6	3.51	0	0	0	0	10.77	33.1	63.04	
-------	-------	-------	------	------	---	---	---	---	-------	------	-------	--

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1...5,10...12} = 266.31$$

Space heating fuel (secondary), kWh/month

$$0$$

= {[(98)m × (201)]} × 100 ÷ (208)

$$(215)m=$$

0	0	0	0	0	0	0	0	0	0	0	0	
---	---	---	---	---	---	---	---	---	---	---	---	--

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1...5,10...12} = 0$$

SAP WorkSheet: New dwelling design stage

Water heating

Output from water heater (calculated above)

152.28	134.11	140.61	125.73	122.98	109.55	104.89	115.54	115.48	130.39	138.28	148.51		
(217)m= 87.63	87.5	87.27	86.91	86.69	86.6	86.6	86.6	86.6	86.86	87.27	87.65	86.6	(216) (217)

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

173.77	153.27	161.13	144.66	141.85	126.5	121.12	133.42	133.34	150.12	158.46	169.43		
Total = Sum(219a), _{...12} =												1767.08	(219)

Annual totals

Space heating fuel used, main system 1

kWh/year

266.31

Water heating fuel used

1767.08

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

114.98 (230a)

central heating pump:

30 (230c)

boiler with a fan-assisted flue

45 (230e)

Total electricity for the above, kWh/year

sum of (230a)...(230g) =

189.98 (231)

Electricity for lighting

249.37 (232)

Electricity generated by PVs

-259.09 (233)

10a. Fuel costs - individual heating systems:

Space heating - main system 1

Fuel
kWh/year

(211) x

Fuel Price
(Table 12)

3.48

Fuel Cost
£/year

x 0.01 = 9.27 (240)

Space heating - main system 2

(213) x

0

x 0.01 = 0 (241)

Space heating - secondary

(215) x

13.19

x 0.01 = 0 (242)

Water heating cost (other fuel)

(219)

3.48

x 0.01 = 61.49 (247)

Pumps, fans and electric keep-hot

(231)

13.19

x 0.01 = 25.06 (249)

(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)

Energy for lighting (232)

13.19

x 0.01 = 32.89 (250)

Additional standing charges (Table 12)

one of (233) to (235) x

13.19

x 0.01 = 0 (252)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost

(245)...(247) + (250)...(254) =

248.71 (255)

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)

0.42 (256)

Energy cost factor (ECF)

[(255) x (256)] ÷ [(4) + 45.0] =

1.12 (257)

SAP rating (Section 12)

84.39 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

SAP WorkSheet: New dwelling design stage

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 57.52 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 381.69 (264)
Space and water heating	(261) + (262) + (263) + (264) =		439.21 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 98.6 (267)
Electricity for lighting	(232) x	0.519	= 129.42 (268)
Energy saving/generation technologies			
Item 1		0.519	= -134.47 (269)
Total CO2, kg/year		sum of (265)...(271) =	532.77 (272)
CO2 emissions per m²		(272) ÷ (4) =	11.02 (273)
EI rating (section 14)			92 (274)

13a. Primary Energy

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 324.89 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2155.83 (264)
Space and water heating	(261) + (262) + (263) + (264) =		2480.73 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 583.23 (267)
Electricity for lighting	(232) x	0	= 765.56 (268)
Energy saving/generation technologies			
Item 1		3.07	= -795.39 (269)
'Total Primary Energy		sum of (265)...(271) =	3034.12 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =	62.78 (273)

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 1-3

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	50.34 (1a)	x (2a)	= 130.88 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	50.34 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n)	= 130.88 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+ 0	+ 0	= 0	x 40 = 0 (6a)
Number of open flues	0	+ 0	+ 0	= 0	x 20 = 0 (6b)
Number of intermittent fans				= 0	x 10 = 0 (7a)
Number of passive vents				= 0	x 10 = 0 (7b)
Number of flueless gas fires				= 0	x 40 = 0 (7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) = 0				÷ (5) = 0	(8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)					
Number of storeys in the dwelling (ns)					[(9)-1]x0.1 = 0 (9)
Additional infiltration					0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					0 (11)

if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area

If based on air permeability value, then (18) = [(17) ÷ 20]+(8), otherwise (18) = (16)

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

(20) = 1 - [0.075 x (19)] =

Infiltration rate incorporating shelter factor

(21) = (18) x (20) =

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(22)m= 5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

Wind Factor (22a)m = (22)m ÷ 4

(22a)m= 1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
--------------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			2.15	x1/[1/(1.1)+ 0.04] =	2.27		(27)
Windows Type 2			2.25	x1/[1/(1.1)+ 0.04] =	2.37		(27)
Windows Type 3			2.89	x 1/[1/(1)+ 0.04] =	2.78		(27)
Floor			22.84	x 0.14 =	3.1976		(28)
Walls Type1	16.64	4.4	12.24	x 0.27 =	3.3		(29)
Walls Type2	9.1	2.89	6.21	x 0.13 =	0.81		(29)
Total area of elements, m ²			48.58				(31)

* for windows and roof windows, use effective window U-value calculated using formula $1/[(1/U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) = 14.72 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) = 715.1 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 6.28 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss (33) + (36) = 21 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m × (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	13.34	13.17	13.01	12.2	12.04	11.23	11.23	11.07	11.55	12.04	12.36	12.69

Heat transfer coefficient, W/K (39)m = (37) + (38)m Average = Sum(39)_{1...12} / 12= 33.17 (39)

(39)m=	34.34	34.18	34.02	33.21	33.04	32.23	32.23	32.07	32.56	33.04	33.37	33.69
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

SAP WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m=	0.68	0.68	0.68	0.66	0.66	0.64	0.64	0.64	0.65	0.66	0.66	0.67	Average = Sum(40) _{1...12} /12=	0.66	(40)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------	------

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	(41)m=	31	28	31	30	31	30	31	31	30	31	31	(41)
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--------	----	----	----	----	----	----	----	----	----	----	----	------

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

1.7

(42)

$$\text{if TFA} > 13.9, N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$$

$$\text{if TFA} \leq 13.9, N = 1$$

Annual average hot water usage in litres per day Vd,average = (25 x N) + 36

74.58

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)

(44)m=	82.04	79.05	76.07	73.09	70.1	67.12	67.12	70.1	73.09	76.07	79.05	82.04
--------	-------	-------	-------	-------	------	-------	-------	------	-------	-------	-------	-------

$$\text{Total} = \text{Sum}(44)_{1...12} =$$

894.93

(44)

Energy content of hot water used - calculated monthly = 4.190 x Vd,m x nm x DTm / 3600 kWh/month (see Tables 1b, 1c, 1d)

(45)m=	121.66	106.4	109.8	95.72	91.85	79.26	73.44	84.28	85.29	99.39	108.49	117.82
--------	--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--------	--------

$$\text{Total} = \text{Sum}(45)_{1...12} =$$

1173.4

(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	18.25	15.96	16.47	14.36	13.78	11.89	11.02	12.64	12.79	14.91	16.27	17.67
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year

$$(48) \times (49) =$$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(51)

If community heating see section 4.3

Volume factor from Table 2a

0

(52)

Temperature factor from Table 2b

0

(53)

Energy lost from water storage, kWh/year

$$(47) \times (51) \times (52) \times (53) =$$

0

(54)

Enter (50) or (54) in (55)

0

(55)

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m)$$

(56)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

(56)

If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) - (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

(57)

Primary circuit loss (annual) from Table 3

0

(58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

(59)

SAP WorkSheet: New dwelling design stage

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=	32.91	29.72	32.89	31.81	32.86	31.78	32.83	32.85	31.8	32.88	31.83	32.91		(61)
--------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	--	------

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=	154.57	136.12	142.68	127.53	124.71	111.04	106.28	117.13	117.08	132.27	140.33	150.73		(62)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0		(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Output from water heater

(64)m=	154.57	136.12	142.68	127.53	124.71	111.04	106.28	117.13	117.08	132.27	140.33	150.73		
	Output from water heater (annual) 1...12												1560.47	(64)

Heat gains from water heating, kWh/month 0.25 [0.85 × (45)m + (61)m] + 0.8 × [(46)m + (57)m + (59)m]

(65)m=	48.68	42.81	44.73	39.78	38.75	34.3	32.63	36.23	36.31	41.27	44.03	47.4		(65)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	------	--	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec			
(66)m=	102.01	102.01	102.01	102.01	102.01	102.01	102.01	102.01	102.01	102.01	102.01	102.01		(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	35.88	31.87	25.92	19.62	14.67	12.38	13.38	17.39	23.34	29.64	34.59	36.88		(67)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	221.07	223.36	217.58	205.28	189.74	175.14	165.39	163.09	168.87	181.18	196.72	211.32		(68)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9	46.9		(69)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3		(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-68	-68	-68	-68	-68	-68	-68	-68	-68	-68	-68	-68		(71)
--------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--	------

Water heating gains (Table 5)

(72)m=	65.43	63.7	60.12	55.25	52.09	47.64	43.86	48.7	50.43	55.47	61.16	63.71		(72)
--------	-------	------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	--	------

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=	406.28	402.84	387.52	364.05	340.4	319.06	306.52	313.09	326.54	350.19	376.37	395.81		(73)
--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
North	0.9x	0.77	x 2.15	x 10.63	x 0.5	x 0.81 = 6.42
North	0.9x	0.77	x 2.25	x 10.63	x 0.5	x 0.81 = 6.71
North	0.9x	0.77	x 2.15	x 20.32	x 0.5	x 0.81 = 12.26
North	0.9x	0.77	x 2.25	x 20.32	x 0.5	x 0.81 = 12.83
North	0.9x	0.77	x 2.15	x 34.53	x 0.5	x 0.81 = 20.84

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	2.25	x	34.53	x	0.5	x	0.81	=	21.81	(74)
North	0.9x	0.77	x	2.15	x	55.46	x	0.5	x	0.81	=	33.47	(74)
North	0.9x	0.77	x	2.25	x	55.46	x	0.5	x	0.81	=	35.03	(74)
North	0.9x	0.77	x	2.15	x	74.72	x	0.5	x	0.81	=	45.09	(74)
North	0.9x	0.77	x	2.25	x	74.72	x	0.5	x	0.81	=	47.18	(74)
North	0.9x	0.77	x	2.15	x	79.99	x	0.5	x	0.81	=	48.27	(74)
North	0.9x	0.77	x	2.25	x	79.99	x	0.5	x	0.81	=	50.51	(74)
North	0.9x	0.77	x	2.15	x	74.68	x	0.5	x	0.81	=	45.06	(74)
North	0.9x	0.77	x	2.25	x	74.68	x	0.5	x	0.81	=	47.16	(74)
North	0.9x	0.77	x	2.15	x	59.25	x	0.5	x	0.81	=	35.75	(74)
North	0.9x	0.77	x	2.25	x	59.25	x	0.5	x	0.81	=	37.41	(74)
North	0.9x	0.77	x	2.15	x	41.52	x	0.5	x	0.81	=	25.05	(74)
North	0.9x	0.77	x	2.25	x	41.52	x	0.5	x	0.81	=	26.22	(74)
North	0.9x	0.77	x	2.15	x	24.19	x	0.5	x	0.81	=	14.6	(74)
North	0.9x	0.77	x	2.25	x	24.19	x	0.5	x	0.81	=	15.28	(74)
North	0.9x	0.77	x	2.15	x	13.12	x	0.5	x	0.81	=	7.92	(74)
North	0.9x	0.77	x	2.25	x	13.12	x	0.5	x	0.81	=	8.28	(74)
North	0.9x	0.77	x	2.15	x	8.86	x	0.5	x	0.81	=	5.35	(74)
North	0.9x	0.77	x	2.25	x	8.86	x	0.5	x	0.81	=	5.6	(74)
South	0.9x	0.54	x	2.89	x	46.75	x	0.5	x	0.75	=	24.62	(78)
South	0.9x	0.54	x	2.89	x	76.57	x	0.5	x	0.75	=	40.33	(78)
South	0.9x	0.54	x	2.89	x	97.53	x	0.5	x	0.75	=	51.37	(78)
South	0.9x	0.54	x	2.89	x	110.23	x	0.5	x	0.75	=	58.06	(78)
South	0.9x	0.54	x	2.89	x	114.87	x	0.5	x	0.75	=	60.5	(78)
South	0.9x	0.54	x	2.89	x	110.55	x	0.5	x	0.75	=	58.23	(78)
South	0.9x	0.54	x	2.89	x	108.01	x	0.5	x	0.75	=	56.89	(78)
South	0.9x	0.54	x	2.89	x	104.89	x	0.5	x	0.75	=	55.25	(78)
South	0.9x	0.54	x	2.89	x	101.89	x	0.5	x	0.75	=	53.66	(78)
South	0.9x	0.54	x	2.89	x	82.59	x	0.5	x	0.75	=	43.5	(78)
South	0.9x	0.54	x	2.89	x	55.42	x	0.5	x	0.75	=	29.19	(78)
South	0.9x	0.54	x	2.89	x	40.4	x	0.5	x	0.75	=	21.28	(78)

Solar gains in watts, calculated for each month

$$(83)m = \text{Sum}(74)m \dots (82)m$$

(83)m=

37.76	65.42	94.01	126.56	152.77	157	149.11	128.41	104.93	73.37	45.39	32.22
-------	-------	-------	--------	--------	-----	--------	--------	--------	-------	-------	-------

 (83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m=

444.04	468.26	481.54	490.61	493.17	476.07	455.63	441.5	431.48	423.56	421.76	428.03
--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--------

 (84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21

(85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(86)m=	0.88	0.85	0.8	0.71	0.58	0.42	0.31	0.33	0.5	0.7	0.83	0.88	(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=

20.22	20.35	20.54	20.76	20.91	20.98	21	20.99	20.96	20.8	20.51	20.2
-------	-------	-------	-------	-------	-------	----	-------	-------	------	-------	------

 (87)

SAP WorkSheet: New dwelling design stage

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m=	20.36	20.36	20.36	20.38	20.38	20.39	20.39	20.4	20.39	20.38	20.37	20.37		(88)
--------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	--	------

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=	0.86	0.83	0.78	0.68	0.55	0.39	0.27	0.29	0.46	0.67	0.81	0.87		(89)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	19.65	19.77	19.96	20.18	20.31	20.38	20.39	20.39	20.36	20.22	19.94	19.64		(90)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

$$fLA = \text{Living area} \div (4) = 0.51 \quad (91)$$

Mean internal temperature (for the whole dwelling) = $fLA \times T1 + (1 - fLA) \times T2$

(92)m=	19.94	20.07	20.25	20.48	20.61	20.69	20.7	20.7	20.67	20.52	20.23	19.93		(92)
--------	-------	-------	-------	-------	-------	-------	------	------	-------	-------	-------	-------	--	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.94	20.07	20.25	20.48	20.61	20.69	20.7	20.7	20.67	20.52	20.23	19.93		(93)
--------	-------	-------	-------	-------	-------	-------	------	------	-------	-------	-------	-------	--	------

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that $T_{i,m} = (76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, h_m :

(94)m=	0.86	0.83	0.78	0.69	0.56	0.4	0.29	0.31	0.48	0.68	0.81	0.87		(94)
--------	------	------	------	------	------	-----	------	------	------	------	------	------	--	------

Useful gains, $h_m G_m$, W = (94)m x (84)m

(95)m=	379.93	387.05	374.39	336.81	276.51	192.46	131.36	136.87	206.39	288.49	340.02	370.36		(95)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, L_m , W = [(39)m x [(93)m - (96)m]]

(97)m=	536.96	518.34	467.8	384.42	294.58	196.17	132.12	137.88	213.79	327.68	438.14	529.84		(97)
--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Space heating requirement for each month, kWh/month = 0.024 x [(97)m - (95)m] x (41)m

(98)m=	116.83	88.23	69.5	34.28	13.44	0	0	0	0	29.16	70.65	118.65		
--------	--------	-------	------	-------	-------	---	---	---	---	-------	-------	--------	--	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1...5,9...12} = 540.74 \quad (98)$$

Space heating requirement in kWh/m²/year

$$10.74 \quad (99)$$

9a. Energy requirements – Individual heating systems including micro-CHP)

Space heating:

Fraction of space heat from secondary/supplementary system

$$0 \quad (201)$$

Fraction of space heat from main system(s)

$$(202) = 1 - (201) = 1 \quad (202)$$

Fraction of total heating from main system 1

$$(204) = (202) \times [1 - (203)] = 1 \quad (204)$$

Efficiency of main space heating system 1

$$90.5 \quad (206)$$

Efficiency of secondary/supplementary heating system, %

$$0 \quad (208)$$

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

116.83	88.23	69.5	34.28	13.44	0	0	0	0	29.16	70.65	118.65	
--------	-------	------	-------	-------	---	---	---	---	-------	-------	--------	--

$$(211)m = [(98)m \times (204)] \times 100 \div (206) = 597.5 \quad (211)$$

129.1	97.49	76.79	37.88	14.85	0	0	0	0	32.22	78.06	131.11	
-------	-------	-------	-------	-------	---	---	---	---	-------	-------	--------	--

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1...5,10...12} = 597.5 \quad (211)$$

Space heating fuel (secondary), kWh/month

$$= [(98)m \times (201)] \times 100 \div (208)$$

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0	
---------	---	---	---	---	---	---	---	---	---	---	---	---	--

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1...5,10...12} = 0 \quad (215)$$

SAP WorkSheet: New dwelling design stage

Water heating

Output from water heater (calculated above)

154.57	136.12	142.68	127.53	124.71	111.04	106.28	117.13	117.08	132.27	140.33	150.73		
(217)m=	88.24	88.09	87.84	87.4	86.96	86.6	86.6	86.6	87.28	87.87	88.28	86.6	(216)

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

175.18	154.52	162.44	145.92	143.4	128.22	122.72	135.25	135.2	151.54	159.7	170.75		
Total = Sum(219a) _{1...12} =											1784.85	(219)	

Annual totals

Space heating fuel used, main system 1

kWh/year

597.5

Water heating fuel used

1784.85

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

119.76 (230a)

central heating pump:

30 (230c)

boiler with a fan-assisted flue

45 (230e)

Total electricity for the above, kWh/year

sum of (230a)...(230g) =

194.76 (231)

Electricity for lighting

253.46 (232)

Electricity generated by PVs

-267.72 (233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year (211) x	Fuel Price (Table 12)	Fuel Cost £/year x 0.01 =
Space heating - main system 1	(211) x	3.48	20.79 (240)
Space heating - main system 2	(213) x	0	0 (241)
Space heating - secondary	(215) x	13.19	0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 62.11 (247)
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 25.69 (249)
(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)			
Energy for lighting	(232)	13.19	x 0.01 = 33.43 (250)
Additional standing charges (Table 12)			120 (251)
	one of (233) to (235) x	13.19	x 0.01 = 0 (252)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost (245)...(247) + (250)...(254) = 262.03 (255)

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)	0.42 (256)
Energy cost factor (ECF)	$[(255) \times (256)] \div [(4) + 45.0] = 1.15$ (257)
SAP rating (Section 12)	83.9 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

SAP WorkSheet: New dwelling design stage

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 129.06 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 385.53 (264)
Space and water heating	(261) + (262) + (263) + (264) =		514.59 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 101.08 (267)
Electricity for lighting	(232) x	0.519	= 131.54 (268)
Energy saving/generation technologies			
Item 1		0.519	= -138.95 (269)
Total CO2, kg/year		sum of (265)...(271) =	608.26 (272)
CO2 emissions per m²		(272) ÷ (4) =	12.08 (273)
EI rating (section 14)			91 (274)

13a. Primary Energy

DRA

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 728.95 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2177.51 (264)
Space and water heating	(261) + (262) + (263) + (264) =		2906.46 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 597.91 (267)
Electricity for lighting	(232) x	0	= 778.11 (268)
Energy saving/generation technologies			
Item 1		3.07	= -821.91 (269)
'Total Primary Energy		sum of (265)...(271) =	3460.58 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =	68.74 (273)

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 2-1

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	85.2 (1a)	x (2a)	= 221.52 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	85.2 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n) =	221.52 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+	0	= 0	x 40 = 0 (6a)
Number of open flues	0	+	0	= 0	x 20 = 0 (6b)
Number of intermittent fans					x 10 = 0 (7a)
Number of passive vents					x 10 = 0 (7b)
Number of flueless gas fires				0 x 40 = 0	(7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =				0 ÷ (5) = 0	(8)
<i>If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)</i>					
Number of storeys in the dwelling (ns)					(9)
Additional infiltration					[(9)-1]x0.1 = 0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					0 (11)

if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

If based on air permeability value, then $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

$(20) = 1 - [0.075 \times (19)] =$

Infiltration rate incorporating shelter factor

$(21) = (18) \times (20) =$

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Monthly average wind speed from Table 7

$(22)m =$	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7
-----------	-----	---	-----	-----	-----	-----	-----	-----	---	-----	-----	-----

Wind Factor $(22a)m = (22)m \div 4$

$(22a)m =$	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
------------	------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 2			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 3			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 4			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 5			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 6			1.41	x 1/[1/(1)+ 0.04] =	1.36		(27)
Windows Type 7			5.46	x 1/[1/(1)+ 0.04] =	5.25		(27)
Windows Type 8			1.41	x 1/[1/(1)+ 0.04] =	1.36		(27)
Walls Type1	23.66	4.7	18.96	x 0.27 =	5.12		(29)
Walls Type2	27.82	8.28	19.54	x 0.13 =	2.54		(29)
Total area of elements, m ²			51.48				(31)

* for windows and roof windows, use effective window U-value calculated using formula $1/[(1/U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) =

20.57 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) =

539 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Low

100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K

11.05 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss

(33) + (36) =

31.62 (37)

SAP WorkSheet: New dwelling design stage

Ventilation heat loss calculated monthly

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(38)m= 22.57	22.3	22.02	20.65	20.38	19.01	19.01	18.73	19.55	20.38	20.93	21.47

$$(38)m = 0.33 \times (25)m \times (5)$$

(38)

Heat transfer coefficient, W/K

(39)m= 54.19	53.92	53.64	52.27	52	50.63	50.63	50.35	51.18	52	52.55	53.1
Average = Sum(39) _{1...12} / 12 =											52.2

$$(39)m = (37) + (38)m$$

(39)

Heat loss parameter (HLP), W/m²K

(40)m= 0.64	0.63	0.63	0.61	0.61	0.59	0.59	0.59	0.6	0.61	0.62	0.62
Average = Sum(40) _{1...12} / 12 =											0.61

(40)

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(41)m= 31	28	31	30	31	30	31	31	30	31	30	31

(41)

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

2.55

(42)

if TFA > 13.9, $N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$

if TFA £ 13.9, $N = 1$

Annual average hot water usage in litres per day $Vd,\text{average} = (25 \times N) + 36$

94.86

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Hot water usage in litres per day for each month $Vd,m = \text{factor from Table 1c} \times (43)$											
(44)m= 104.35	100.55	96.76	92.96	89.17	85.38	85.38	89.17	92.96	96.76	100.55	104.35
Total = Sum(44) _{1...12} =											1138.34

(44)

Energy content of hot water used - calculated monthly = $4.190 \times Vd,m \times nm \times DTm / 3600 \text{ kWh/month}$ (see Tables 1b, 1c, 1d)

(45)m= 154.74	135.34	139.66	121.76	116.83	100.82	93.42	107.2	108.48	126.42	138	149.86
Total = Sum(45) _{1...12} =											1492.54

(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m= 23.21	20.3	20.95	18.26	17.52	15.12	14.01	16.08	16.27	18.96	20.7	22.48
--------------	------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------

(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

Energy lost from water storage, kWh/year $(48) \times (49) =$

0

(49)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(51)

If community heating see section 4.3

Volume factor from Table 2a

0

(52)

Temperature factor from Table 2b

0

(53)

Energy lost from water storage, kWh/year $(47) \times (51) \times (52) \times (53) =$

0

(54)

Enter (50) or (54) in (55)

0

(55)

Water storage loss calculated for each month $((56)m = (55) \times (41)m)$

(56)m= 0	0	0	0	0	0	0	0	0	0	0	0
----------	---	---	---	---	---	---	---	---	---	---	---

(56)

SAP WorkSheet: New dwelling design stage

If cylinder contains dedicated solar storage, $(57)m = (56)m \times [(50) - (H11)] \div (50)$, else $(57)m = (56)m$ where $(H11)$ is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0	(57)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Primary circuit loss (annual) from Table 3	0	(58)
--	---	------

Primary circuit loss calculated for each month $(59)m = (58) \div 365 \times (41)m$

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0	(59)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Combi loss calculated for each month $(61)m = (60) \div 365 \times (41)m$

(61)m=	33	29.8	32.97	31.88	32.92	31.84	32.88	32.91	31.86	32.95	31.92	32.99	(61)
--------	----	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Total heat required for water heating calculated for each month $(62)m = 0.85 \times (45)m + (46)m + (57)m + (59)m$

(62)m=	187.75	165.14	172.63	153.64	149.75	132.65	126.3	140.11	140.34	159.37	169.92	182.86	(62)
--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRS and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0	(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Output from water heater

(64)m=	187.75	165.14	172.63	153.64	149.75	132.65	126.3	140.11	140.34	159.37	169.92	182.86	Output from water heater (annual) 1...12	1880.46	(64)
--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--	---------	------

Heat gains from water heating, kWh/month $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=	59.7	52.45	54.68	48.45	47.08	41.48	39.28	43.87	44.03	50.27	53.87	58.08	(65)
--------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	153.25	153.25	153.25	153.25	153.25	153.25	153.25	153.25	153.25	153.25	153.25	153.25	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	56.23	49.95	40.62	30.75	22.99	19.41	20.97	27.26	36.58	46.45	54.22	57.8	(67)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	343.23	346.79	337.82	318.71	294.59	271.92	256.78	253.22	262.19	281.3	305.42	328.09	(68)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	52.88	52.88	52.88	52.88	52.88	52.88	52.88	52.88	52.88	52.88	52.88	52.88	(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3	(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	-102.17	(71)
--------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	---------	------

Water heating gains (Table 5)

(72)m=	80.25	78.05	73.49	67.3	63.27	57.61	52.8	58.97	61.16	67.57	74.81	78.06	(72)
--------	-------	-------	-------	------	-------	-------	------	-------	-------	-------	-------	-------	------

Total internal gains = $(66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m$

(73)m=	586.67	581.75	558.89	523.72	487.81	455.9	437.51	446.4	466.9	502.29	541.41	570.91	(73)
--------	--------	--------	--------	--------	--------	-------	--------	-------	-------	--------	--------	--------	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
--------------	---------------------------	------------------------	------------------	-----------------	----------------	--------------

SAP WorkSheet: New dwelling design stage

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.54	x	1.41	x	46.75	x	0.5	x	0.81	=	2.34	(74)
South	0.9x	0.54	x	1.41	x	76.57	x	0.5	x	0.81	=	2.34	(74)
South	0.9x	0.54	x	1.41	x	97.53	x	0.5	x	0.7	=	11.21	(78)
South	0.9x	0.54	x	1.41	x	110.23	x	0.5	x	0.7	=	18.36	(78)
South	0.9x	0.54	x	1.41	x	114.87	x	0.5	x	0.7	=	23.39	(78)
South	0.9x	0.54	x	1.41	x	114.87	x	0.5	x	0.7	=	26.44	(78)
South	0.9x	0.54	x	1.41	x	114.87	x	0.5	x	0.7	=	27.55	(78)
South	0.9x	0.54	x	1.41	x	110.55	x	0.5	x	0.7	=	26.51	(78)
South	0.9x	0.54	x	1.41	x	108.01	x	0.5	x	0.7	=	25.91	(78)
South	0.9x	0.54	x	1.41	x	104.89	x	0.5	x	0.7	=	25.16	(78)
South	0.9x	0.54	x	1.41	x	101.89	x	0.5	x	0.7	=	24.44	(78)
South	0.9x	0.54	x	1.41	x	82.59	x	0.5	x	0.7	=	19.81	(78)
South	0.9x	0.54	x	1.41	x	55.42	x	0.5	x	0.7	=	13.29	(78)
South	0.9x	0.54	x	1.41	x	40.4	x	0.5	x	0.7	=	9.69	(78)
Southwest	0.9x	0.54	x	5.46	x	36.79		0.5	x	0.73	=	35.64	(79)
Southwest	0.9x	0.54	x	1.41	x	36.79		0.5	x	0.7	=	8.82	(79)
Southwest	0.9x	0.54	x	5.46	x	62.67		0.5	x	0.73	=	60.7	(79)
Southwest	0.9x	0.54	x	1.41	x	62.67		0.5	x	0.7	=	15.03	(79)
Southwest	0.9x	0.54	x	5.46	x	85.75		0.5	x	0.73	=	83.06	(79)
Southwest	0.9x	0.54	x	1.41	x	85.75		0.5	x	0.7	=	20.57	(79)
Southwest	0.9x	0.54	x	5.46	x	106.25		0.5	x	0.73	=	102.91	(79)
Southwest	0.9x	0.54	x	1.41	x	106.25		0.5	x	0.7	=	25.48	(79)
Southwest	0.9x	0.54	x	5.46	x	119.01		0.5	x	0.73	=	115.27	(79)
Southwest	0.9x	0.54	x	1.41	x	119.01		0.5	x	0.7	=	28.54	(79)

SAP WorkSheet: New dwelling design stage

Southwest	0.9x	0.54	x	5.46	x	118.15		0.5	x	0.73	=	114.43	(79)
Southwest	0.9x	0.54	x	1.41	x	118.15		0.5	x	0.7	=	28.34	(79)
Southwest	0.9x	0.54	x	5.46	x	113.91		0.5	x	0.73	=	110.33	(79)
Southwest	0.9x	0.54	x	1.41	x	113.91		0.5	x	0.7	=	27.32	(79)
Southwest	0.9x	0.54	x	5.46	x	104.39		0.5	x	0.73	=	101.11	(79)
Southwest	0.9x	0.54	x	1.41	x	104.39		0.5	x	0.7	=	25.04	(79)
Southwest	0.9x	0.54	x	5.46	x	92.85		0.5	x	0.73	=	89.93	(79)
Southwest	0.9x	0.54	x	1.41	x	92.85		0.5	x	0.7	=	22.27	(79)
Southwest	0.9x	0.54	x	5.46	x	69.27		0.5	x	0.73	=	67.09	(79)
Southwest	0.9x	0.54	x	1.41	x	69.27		0.5	x	0.7	=	16.61	(79)
Southwest	0.9x	0.54	x	5.46	x	44.07		0.5	x	0.73	=	42.68	(79)
Southwest	0.9x	0.54	x	1.41	x	44.07		0.5	x	0.7	=	10.57	(79)
Southwest	0.9x	0.54	x	5.46	x	31.49		0.5	x	0.73	=	30.5	(79)
Southwest	0.9x	0.54	x	1.41	x	31.49		0.5	x	0.7	=	7.55	(79)

Solar gains in watts, calculated for each month

(83)m = Sum(74)m ... (82)m

(83)m =	69.7	120.9	172.56	228	269.92	274.8	262.06	229.46	191.4	135.42	83.85	59.43	(83)
---------	------	-------	--------	-----	--------	-------	--------	--------	-------	--------	-------	-------	------

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m =	656.38	702.66	731.46	751.72	757.74	730.7	699.57	675.86	658.3	637.7	625.26	630.34	(84)
---------	--------	--------	--------	--------	--------	-------	--------	--------	-------	-------	--------	--------	------

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		(86)
(86)m =	0.9	0.87	0.82	0.73	0.6	0.43	0.32	0.34	0.52	0.73	0.86	0.91	

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m =	20.2	20.35	20.55	20.78	20.92	20.98	21	21	20.97	20.81	20.5	20.18	(87)
---------	------	-------	-------	-------	-------	-------	----	----	-------	-------	------	-------	------

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m =	20.4	20.4	20.4	20.42	20.42	20.44	20.44	20.44	20.43	20.42	20.41	20.41	(88)
---------	------	------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m =	0.89	0.86	0.81	0.7	0.57	0.4	0.28	0.3	0.48	0.7	0.84	0.9	(89)
---------	------	------	------	-----	------	-----	------	-----	------	-----	------	-----	------

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m =	19.67	19.81	20	20.23	20.36	20.42	20.43	20.44	20.41	20.26	19.97	19.66	(90)
---------	-------	-------	----	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

fLA = Living area ÷ (4) =

0.37

(91)

Mean internal temperature (for the whole dwelling) = fLA × T1 + (1 – fLA) × T2

(92)m =	19.86	20.01	20.2	20.43	20.56	20.63	20.64	20.64	20.61	20.46	20.16	19.85	(92)
---------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m =	19.86	20.01	20.2	20.43	20.56	20.63	20.64	20.64	20.61	20.46	20.16	19.85	(93)
---------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

8. Space heating requirement

Set Ti to the mean internal temperature obtained at step 11 of Table 9b, so that $Ti,m = (76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, hm:

(94)m =	0.88	0.85	0.8	0.7	0.57	0.41	0.29	0.31	0.49	0.71	0.84	0.89	(94)
---------	------	------	-----	-----	------	------	------	------	------	------	------	------	------

SAP WorkSheet: New dwelling design stage

Useful gains, hmGm , W = (94)m x (84)m

(95)m=	579.25	598.14	584.83	529.31	434.36	300.27	203.58	212.26	322.62	450.21	522.48	562.34		(95)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, Lm , W = [(39)m x [(93)m – (96)m]

(97)m=	843.29	814.45	735	602.69	460.8	305.21	204.5	213.51	333.15	512.75	686.45	830.98		(97)
--------	--------	--------	-----	--------	-------	--------	-------	--------	--------	--------	--------	--------	--	------

Space heating requirement for each month, kWh/month = 0.024 x [(97)m – (95)m] x (41)m

(98)m=	196.44	145.36	111.72	52.84	19.67	0	0	0	0	46.53	118.06	199.86		
--------	--------	--------	--------	-------	-------	---	---	---	---	-------	--------	--------	--	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1,5,9,12} = 890.5 \quad (98)$$

Space heating requirement in kWh/m²/year

$$10.45 \quad (99)$$

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system

$$0 \quad (201)$$

Fraction of space heat from main system(s)

$$(202) = 1 - (201) = 1 \quad (202)$$

Fraction of total heating from main system 1


$$(204) = (202) \times [1 - (203)] = 1 \quad (204)$$

Efficiency of main space heating system 1

$$90.5 \quad (206)$$

Efficiency of secondary/supplementary heating system, %

$$0 \quad (208)$$

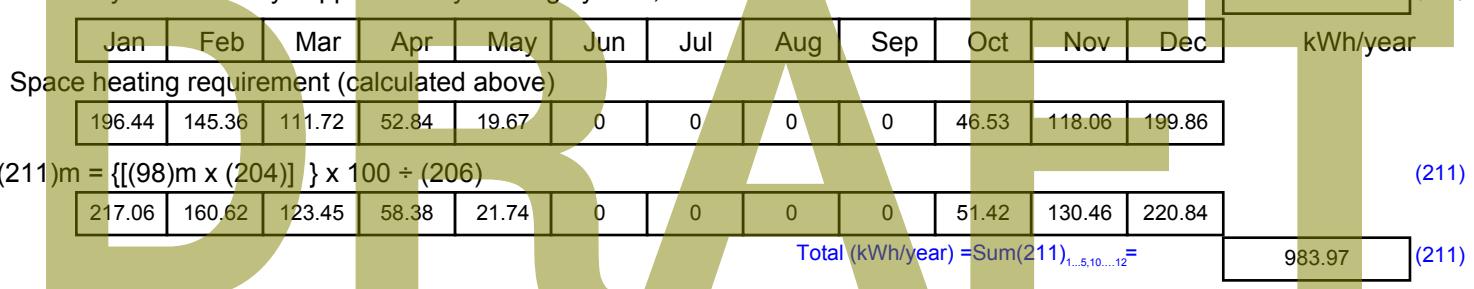

Space heating requirement (calculated above)

$$217.06 \quad (211)$$

$$(211)m = \{[(98)m \times (204)]\} \times 100 \div (206) = 217.06 \quad (211)$$

$$160.62 \quad (211)$$

$$123.45 \quad (211)$$

$$58.38 \quad (211)$$

$$21.74 \quad (211)$$

$$0 \quad (211)$$

$$0 \quad (211)$$

$$51.42 \quad (211)$$

$$130.46 \quad (211)$$

$$220.84 \quad (211)$$

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1,5,10,12} = 983.97 \quad (211)$$

Space heating fuel (secondary), kWh/month

= {[(98)m x (201)]} x 100 ÷ (208)

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0		(215)
---------	---	---	---	---	---	---	---	---	---	---	---	---	--	-------

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1,5,10,12} = 0 \quad (215)$$

Water heating

Output from water heater (calculated above)

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.92 \quad (216)$$

$$182.86 \quad (216)$$

$$187.75 \quad (216)$$

$$165.14 \quad (216)$$

$$172.63 \quad (216)$$

$$153.64 \quad (216)$$

$$149.75 \quad (216)$$

$$132.65 \quad (216)$$

$$126.3 \quad (216)$$

$$140.11 \quad (216)$$

$$140.34 \quad (216)$$

$$159.37 \quad (216)$$

$$169.9$$

SAP WorkSheet: New dwelling design stage

central heating pump:		30	(230c)
boiler with a fan-assisted flue		45	(230e)
Total electricity for the above, kWh/year	sum of (230a)...(230g) =	277.69	(231)
Electricity for lighting		397.25	(232)
Electricity generated by PVs		-453.4	(233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	x 0.01 = 34.24 (240)
Space heating - main system 2	(213) x	0	x 0.01 = 0 (241)
Space heating - secondary	(215) x	13.19	x 0.01 = 0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 74.7 (247)
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 36.63 (249)

(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)

Energy for lighting	(232)	13.19	x 0.01 = 52.4 (250)
---------------------	-------	-------	---------------------

Additional standing charges (Table 12)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost

$$(245) \dots (247) + (250) \dots (254) =$$

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)

$$[(255) \times (256)] \div [(4) + 45.0] =$$

SAP rating (Section 12)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 212.54 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 463.67 (264)
Space and water heating	(261) + (262) + (263) + (264) =		676.2 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 144.12 (267)
Electricity for lighting	(232) x	0.519	= 206.17 (268)
Energy saving/generation technologies			
Item 1		0.519	= -235.31 (269)
Total CO2, kg/year	sum of (265) ... (271) =		791.18 (272)
CO2 emissions per m ²	(272) ÷ (4) =		9.29 (273)

SAP WorkSheet: New dwelling design stage

EI rating (section 14)

92

(274)

13a. Primary Energy

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 1200.45 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2618.85 (264)
Space and water heating	(261) + (262) + (263) + (264) =		3819.3 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 852.51 (267)
Electricity for lighting	(232) x	0	= 1219.55 (268)
Energy saving/generation technologies			
Item 1		3.07	= -1391.94 (269)
'Total Primary Energy		sum of (265)...(271) =	4499.42 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =	52.81 (273)

DRAFT

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 2-2

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	74.17 (1a)	x (2a)	2.6 = 192.84 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	74.17 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n) =	192.84 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+	0	+	0 x 40 = 0 (6a)
Number of open flues	0	+	0	+	0 x 20 = 0 (6b)
Number of intermittent fans					0 x 10 = 0 (7a)
Number of passive vents					0 x 10 = 0 (7b)
Number of flueless gas fires				0 x 40 = 0 (7c)	
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =				0 ÷ (5) = 0 (8)	
<i>If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)</i>					
Number of storeys in the dwelling (ns)					0 (9)
Additional infiltration					0 (10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					0 (11)

if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

If based on air permeability value, then $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

$(20) = 1 - [0.075 \times (19)] =$

Infiltration rate incorporating shelter factor

$(21) = (18) \times (20) =$

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

Wind Factor (22a)m = (22)m ÷ 4

(22)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 2			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 3			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 4			0.94	x1/[1/(1.1)+ 0.04] =	0.99		(27)
Windows Type 5			1.88	x1/[1/(1.1)+ 0.04] =	1.98		(27)
Windows Type 6			6.79	x 1/[1/(1)+ 0.04] =	6.53		(27)
Walls Type1	27.82	5.64	22.18	x 0.27 =	5.99		(29)
Walls Type2	9.36	6.79	2.57	x 0.13 =	0.33		(29)
Total area of elements, m ²			37.18				(31)

* for windows and roof windows, use effective window U-value calculated using formula $1/[(1/U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) = 18.79 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) = 346.5 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 10.86 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss (33) + (36) = 29.65 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m x (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	19.65	19.41	19.17	17.98	17.74	16.55	16.55	16.31	17.02	17.74	18.22	18.69

Heat transfer coefficient, W/K (39)m = (37) + (38)m 47.57 (39)

(39)m=	49.3	49.06	48.82	47.63	47.39	46.2	46.2	45.96	46.68	47.39	47.87	48.35
--------	------	-------	-------	-------	-------	------	------	-------	-------	-------	-------	-------

SAP WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m=	0.66	0.66	0.66	0.64	0.64	0.62	0.62	0.62	0.63	0.64	0.65	0.65			
													Average = Sum(40) _{1...12} /12=	0.64	(40)

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec			
(41)m=	31	28	31	30	31	30	31	31	30	31	30	31		(41)

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

2.34

(42)

$$\text{if TFA} > 13.9, N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$$

$$\text{if TFA} \leq 13.9, N = 1$$

Annual average hot water usage in litres per day Vd,average = (25 x N) + 36

89.85

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)											

(44)m=	98.83	95.24	91.64	88.05	84.45	80.86	80.86	84.45	88.05	91.64	95.24	98.83		
	Total = Sum(44) _{1...12} =												1078.15	(44)

Energy content of hot water used - calculated monthly = 4.190 x Vd,m x nm x DTm / 3600 kWh/month (see Tables 1b, 1c, 1d)

(45)m=	146.56	128.18	132.27	115.32	110.65	95.48	88.48	101.53	102.75	119.74	130.71	141.94		
	Total = Sum(45) _{1...12} =												1413.62	(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	21.98	19.23	19.84	17.3	16.6	14.32	13.27	15.23	15.41	17.96	19.61	21.29		
	Water storage loss:													(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year

$$(48) \times (49) =$$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(51)

If community heating see section 4.3

Volume factor from Table 2a

0

(52)

Temperature factor from Table 2b

0

(53)

Energy lost from water storage, kWh/year

$$(47) \times (51) \times (52) \times (53) =$$

0

(54)

Enter (50) or (54) in (55)

0

(55)

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m)$$

(56)m=	0	0	0	0	0	0	0	0	0	0	0	0	
	If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) - (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H												(56)

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0	
	Primary circuit loss (annual) from Table 3												(57)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0	
	(59)												(59)

SAP WorkSheet: New dwelling design stage

Combi loss calculated for each month (61)m = $(60) \div 365 \times (41)m$

(61)m=	32.99	29.78	32.95	31.86	32.9	31.82	32.87	32.89	31.84	32.93	31.9	32.98		(61)
--------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	------	-------	--	------

Total heat required for water heating calculated for each month (62)m = $0.85 \times (45)m + (46)m + (57)m + (59)m + (61)m$

(62)m=	179.55	157.96	165.22	147.18	143.56	127.31	121.35	134.42	134.59	152.67	162.6	174.92		(62)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0		(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Output from water heater

(64)m=	179.55	157.96	165.22	147.18	143.56	127.31	121.35	134.42	134.59	152.67	162.6	174.92		
	Output from water heater (annual) 1...12												1801.33	(64)

Heat gains from water heating, kWh/month $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=	56.98	50.07	52.22	46.31	45.02	39.7	37.64	41.98	42.12	48.05	51.43	55.44		(65)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	--	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	140.58	140.58	140.58	140.58	140.58	140.58	140.58	140.58	140.58	140.58	140.58	140.58		(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	49.12	43.63	35.48	26.86	20.08	16.95	18.32	23.81	31.96	40.58	47.36	50.49		(67)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	308.7	311.9	303.83	286.64	264.95	244.56	230.94	227.74	235.81	253	274.69	295.08		(68)
--------	-------	-------	--------	--------	--------	--------	--------	--------	--------	-----	--------	--------	--	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	51.4	51.4	51.4	51.4	51.4	51.4	51.4	51.4	51.4	51.4	51.4	51.4		(69)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3		(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72	-93.72		(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Water heating gains (Table 5)

(72)m=	76.58	74.5	70.19	64.32	60.51	55.14	50.59	56.43	58.5	64.58	71.44	74.51		(72)
--------	-------	------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	--	------

Total internal gains = $(66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m$

(73)m=	535.66	531.29	510.76	479.08	446.8	417.92	401.11	409.24	427.53	459.41	494.74	521.34		(73)
--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)							
North	0.9x	0.77	x	0.94	x	10.63	x	0.5	x	0.81	=	2.81	(74)
North	0.9x	0.77	x	0.94	x	10.63	x	0.5	x	0.81	=	2.81	(74)
North	0.9x	0.77	x	0.94	x	10.63	x	0.5	x	0.81	=	2.81	(74)
North	0.9x	0.77	x	0.94	x	10.63	x	0.5	x	0.81	=	2.81	(74)
North	0.9x	0.77	x	1.88	x	10.63	x	0.5	x	0.81	=	5.61	(74)

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	0.94	x	20.32	x	0.5	x	0.81	=	5.36	(74)
North	0.9x	0.77	x	0.94	x	20.32	x	0.5	x	0.81	=	5.36	(74)
North	0.9x	0.77	x	0.94	x	20.32	x	0.5	x	0.81	=	5.36	(74)
North	0.9x	0.77	x	0.94	x	20.32	x	0.5	x	0.81	=	5.36	(74)
North	0.9x	0.77	x	1.88	x	20.32	x	0.5	x	0.81	=	10.72	(74)
North	0.9x	0.77	x	0.94	x	34.53	x	0.5	x	0.81	=	9.11	(74)
North	0.9x	0.77	x	0.94	x	34.53	x	0.5	x	0.81	=	9.11	(74)
North	0.9x	0.77	x	0.94	x	34.53	x	0.5	x	0.81	=	9.11	(74)
North	0.9x	0.77	x	1.88	x	34.53	x	0.5	x	0.81	=	18.22	(74)
North	0.9x	0.77	x	0.94	x	55.46	x	0.5	x	0.81	=	14.63	(74)
North	0.9x	0.77	x	0.94	x	55.46	x	0.5	x	0.81	=	14.63	(74)
North	0.9x	0.77	x	0.94	x	55.46	x	0.5	x	0.81	=	14.63	(74)
North	0.9x	0.77	x	1.88	x	55.46	x	0.5	x	0.81	=	29.27	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	0.94	x	74.72	x	0.5	x	0.81	=	19.71	(74)
North	0.9x	0.77	x	1.88	x	74.72	x	0.5	x	0.81	=	39.42	(74)
North	0.9x	0.77	x	0.94	x	79.99	x	0.5	x	0.81	=	21.1	(74)
North	0.9x	0.77	x	0.94	x	79.99	x	0.5	x	0.81	=	21.1	(74)
North	0.9x	0.77	x	0.94	x	79.99	x	0.5	x	0.81	=	21.1	(74)
North	0.9x	0.77	x	0.94	x	79.99	x	0.5	x	0.81	=	21.1	(74)
North	0.9x	0.77	x	1.88	x	79.99	x	0.5	x	0.81	=	42.2	(74)
North	0.9x	0.77	x	0.94	x	74.68	x	0.5	x	0.81	=	19.7	(74)
North	0.9x	0.77	x	0.94	x	74.68	x	0.5	x	0.81	=	19.7	(74)
North	0.9x	0.77	x	0.94	x	74.68	x	0.5	x	0.81	=	19.7	(74)
North	0.9x	0.77	x	0.94	x	74.68	x	0.5	x	0.81	=	19.7	(74)
North	0.9x	0.77	x	1.88	x	74.68	x	0.5	x	0.81	=	39.4	(74)
North	0.9x	0.77	x	0.94	x	59.25	x	0.5	x	0.81	=	15.63	(74)
North	0.9x	0.77	x	0.94	x	59.25	x	0.5	x	0.81	=	15.63	(74)
North	0.9x	0.77	x	0.94	x	59.25	x	0.5	x	0.81	=	15.63	(74)
North	0.9x	0.77	x	0.94	x	59.25	x	0.5	x	0.81	=	15.63	(74)
North	0.9x	0.77	x	1.88	x	59.25	x	0.5	x	0.81	=	31.26	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	0.94	x	41.52	x	0.5	x	0.81	=	10.95	(74)
North	0.9x	0.77	x	1.88	x	41.52	x	0.5	x	0.81	=	21.91	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	0.94	x	24.19	x	0.5	x	0.81	=	6.38	(74)
North	0.9x	0.77	x	1.88	x	24.19	x	0.5	x	0.81	=	12.76	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	0.94	x	13.12	x	0.5	x	0.81	=	3.46	(74)
North	0.9x	0.77	x	1.88	x	13.12	x	0.5	x	0.81	=	6.92	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
North	0.9x	0.77	x	0.94	x	8.86	x	0.5	x	0.81	=	2.34	(74)
South	0.9x	0.54	x	6.79	x	46.75	x	0.5	x	0.73	=	56.31	(78)
South	0.9x	0.54	x	6.79	x	76.57	x	0.5	x	0.73	=	92.22	(78)
South	0.9x	0.54	x	6.79	x	97.53	x	0.5	x	0.73	=	117.48	(78)
South	0.9x	0.54	x	6.79	x	110.23	x	0.5	x	0.73	=	132.77	(78)
South	0.9x	0.54	x	6.79	x	114.87	x	0.5	x	0.73	=	138.36	(78)
South	0.9x	0.54	x	6.79	x	110.55	x	0.5	x	0.73	=	133.15	(78)
South	0.9x	0.54	x	6.79	x	108.01	x	0.5	x	0.73	=	130.1	(78)
South	0.9x	0.54	x	6.79	x	104.89	x	0.5	x	0.73	=	126.34	(78)
South	0.9x	0.54	x	6.79	x	101.89	x	0.5	x	0.73	=	122.72	(78)
South	0.9x	0.54	x	6.79	x	82.59	x	0.5	x	0.73	=	99.47	(78)
South	0.9x	0.54	x	6.79	x	55.42	x	0.5	x	0.73	=	66.75	(78)
South	0.9x	0.54	x	6.79	x	40.4	x	0.5	x	0.73	=	48.66	(78)

Solar gains in watts, calculated for each month

(83)m = Sum(74)m ... (82)m

(83)m=

 (83)

Total gains – internal and solar (84)m = (73)m + (83)m , watts

(84)m=

 (84)

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 (°C)

21

(85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(86)m= 0.89	0.86	0.81	0.71	0.58	0.43	0.31	0.33	0.5	0.71	0.84	0.9		(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=

 (87)

Temperature during heating periods in rest of dwelling from Table 9, Th2 (°C)

(88)m=

 (88)

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=

 (89)

SAP WorkSheet: New dwelling design stage

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	19.63	19.78	19.98	20.2	20.33	20.4	20.41	20.41	20.38	20.24	19.94	19.62		(90)
													$fLA = \text{Living area} \div (4) =$	0.39 (91)

Mean internal temperature (for the whole dwelling) = $fLA \times T1 + (1 - fLA) \times T2$

(92)m=	19.85	20	20.2	20.42	20.56	20.63	20.64	20.64	20.61	20.46	20.16	19.83		(92)
--------	-------	----	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.85	20	20.2	20.42	20.56	20.63	20.64	20.64	20.61	20.46	20.16	19.83		(93)
--------	-------	----	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that $T_{i,m}=(76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, h_m :

(94)m=	0.87	0.84	0.78	0.69	0.56	0.4	0.29	0.31	0.48	0.69	0.82	0.88		(94)
--------	------	------	------	------	------	-----	------	------	------	------	------	------	--	------

Useful gains, $h_m G_m$, W = $(94)m \times (84)m$

(95)m=	530.42	548.83	535.31	482.51	395.18	273.55	185.61	193.55	293.97	411.36	478.49	514.89		(95)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, L_m , W = $[(39)m \times [(93)m - (96)m]]$

(97)m=	766.55	740.86	668.77	548.88	419.76	278.4	186.54	194.81	303.75	467.19	624.99	755.88		(97)
--------	--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--	------

Space heating requirement for each month, kWh/month = $0.024 \times [(97)m - (95)m] \times (41)m$

(98)m=	175.69	129.04	99.29	47.79	18.29	0	0	0	0	41.54	105.48	179.3		
--------	--------	--------	-------	-------	-------	---	---	---	---	-------	--------	-------	--	--

Total per year (kWh/year) = Sum(98)_{1...5,9...12} = 796.42 (98)

Space heating requirement in kWh/m²/year

													10.74 (99)
--	--	--	--	--	--	--	--	--	--	--	--	--	------------

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system

	0 (201)
--	---------

Fraction of space heat from main system(s)

(202) = 1 - (201) = 1 (202)

Fraction of total heating from main system 1

(204) = (202) × [1 - (203)] = 1 (204)

Efficiency of main space heating system 1

Efficiency of secondary/supplementary heating system, %

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

175.69	129.04	99.29	47.79	18.29	0	0	0	0	41.54	105.48	179.3	
--------	--------	-------	-------	-------	---	---	---	---	-------	--------	-------	--

$(211)m = \{[(98)m \times (204)]\} \times 100 \div (206)$ (211)

194.13	142.59	109.72	52.8	20.21	0	0	0	0	45.9	116.56	198.12	
--------	--------	--------	------	-------	---	---	---	---	------	--------	--------	--

Total (kWh/year) = Sum(211)_{1...5,10...12} = 880.02 (211)

Space heating fuel (secondary), kWh/month

= $\{[(98)m \times (201)]\} \times 100 \div (208)$

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Total (kWh/year) = Sum(215)_{1...5,10...12} = 0 (215)

Water heating

Output from water heater (calculated above)

179.55	157.96	165.22	147.18	143.56	127.31	121.35	134.42	134.59	152.67	162.6	174.92	
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--

Efficiency of water heater

86.6 (216)

SAP WorkSheet: New dwelling design stage

(217)m =	88.49	88.31	88.02	87.52	87.02	86.6	86.6	86.6	87.41	88.09	88.53	(217)
----------	-------	-------	-------	-------	-------	------	------	------	-------	-------	-------	-------

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

(219)m =	202.91	178.87	187.7	168.16	164.96	147	140.13	155.22	155.41	174.67	184.58	197.58	Total = Sum(219a) _{1...12} =	2057.2	(219)
----------	--------	--------	-------	--------	--------	-----	--------	--------	--------	--------	--------	--------	---------------------------------------	--------	-------

Annual totals

Space heating fuel used, main system 1

kWh/year

880.02

Water heating fuel used

2057.2

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

176.45

(230a)

central heating pump:

30

(230c)

boiler with a fan-assisted flue

45

(230e)

Total electricity for the above, kWh/year

sum of (230a)...(230g) =

251.45

(231)

Electricity for lighting

347.01

(232)

Electricity generated by PVs

-397.27

(233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	x 0.01 = 30.62
Space heating - main system 2	(213) x	0	x 0.01 = 0
Space heating - secondary	(215) x	13.19	x 0.01 = 0
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 71.59
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 33.17

(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)

Energy for lighting (232)

x 0.01 = 45.77

Additional standing charges (Table 12)

one of (233) to (235) x 0.01 = 120

(251)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost

(245)...(247) + (250)...(254) = 301.15

(255)

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)

0.42

(256)

Energy cost factor (ECF)

[(255) x (256)] ÷ [(4) + 45.0] = 1.06

(257)

SAP rating (Section 12)

85.19

(258)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 190.08

SAP WorkSheet: New dwelling design stage

Space heating (secondary)	(215) x	0.519	=	0	(263)
Water heating	(219) x	0.216	=	444.35	(264)
Space and water heating	(261) + (262) + (263) + (264) =			634.44	(265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	=	130.5	(267)
Electricity for lighting	(232) x	0.519	=	180.1	(268)
Energy saving/generation technologies					
Item 1		0.519	=	-206.18	(269)
Total CO2, kg/year		sum of (265)...(271) =		738.86	(272)
CO2 emissions per m²		(272) ÷ (4) =		9.96	(273)
EI rating (section 14)				92	(274)

13a. Primary Energy

	Energy kWh/year	Primary factor	P. Energy kWh/year	
Space heating (main system 1)	(211) x	1.22	1073.63	(261)
Space heating (secondary)	(215) x	3.07	0	(263)
Energy for water heating	(219) x	1.22	2509.78	(264)
Space and water heating	(261) + (262) + (263) + (264) =		3583.41	(265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	771.95	(267)
Electricity for lighting	(232) x	0	1065.31	(268)
Energy saving/generation technologies				
Item 1		3.07	-1219.6	(269)
'Total Primary Energy		sum of (265)...(271) =	4201.06	(272)
Primary energy kWh/m²/year		(272) ÷ (4) =	56.64	(273)

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 3-1

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	80.69 (1a)	x (2a)	= 209.79 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	80.69 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n) =	209.79 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+	0	= 0	x 40 = 0 (6a)
Number of open flues	0	+	0	= 0	x 20 = 0 (6b)
Number of intermittent fans					x 10 = 0 (7a)
Number of passive vents					x 10 = 0 (7b)
Number of flueless gas fires				0 x 40 = 0	(7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =				0 ÷ (5) = 0	(8)
<i>If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)</i>					
Number of storeys in the dwelling (ns)					(9)
Additional infiltration				[(9)-1]x0.1 = 0	(10)
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					0 (11)

if both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area

If based on air permeability value, then (18) = [(17) ÷ 20]+(8), otherwise (18) = (16)

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

(20) = 1 - [0.075 x (19)] =

Infiltration rate incorporating shelter factor

(21) = (18) x (20) =

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Monthly average wind speed from Table 7

(22)m=	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7
--------	-----	---	-----	-----	-----	-----	-----	-----	---	-----	-----	-----

Wind Factor (22a)m = (22)m ÷ 4

(22a)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
---------	------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			1.03	x 1/[1/(1)+ 0.04] =	0.99		
Windows Type 2			2.61	x 1/[1/(1)+ 0.04] =	2.51		
Windows Type 3			2.61	x 1/[1/(1)+ 0.04] =	2.51		
Windows Type 4			1.41	x 1/[1/(1)+ 0.04] =	1.36		
Windows Type 5			5.46	x 1/[1/(1)+ 0.04] =	5.25		
Windows Type 6			1.41	x 1/[1/(1)+ 0.04] =	1.36		
Walls Type1	27.04	6.25	20.79	x 0.13 =	2.7		
Walls Type2	27.82	8.28	19.54	x 0.13 =	2.54		
Roof	28.47	0	28.47	x 0.2 =	5.69		
Total area of elements, m ²			83.33				

* for windows and roof windows, use effective window U-value calculated using formula $1/[(1/U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) = 24.91 (33)

Heat capacity Cm = S(A x k) ((28)...(30) + (32) + (32a)...(32e) = 820.85 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K 20.28 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss (33) + (36) = 45.19 (37)

Ventilation heat loss calculated monthly (38)m = 0.33 × (25)m × (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

SAP WorkSheet: New dwelling design stage

(38)m=	21.38	21.12	20.86	19.56	19.3	18	18	17.74	18.52	19.3	19.82	20.34	(38)
--------	-------	-------	-------	-------	------	----	----	-------	-------	------	-------	-------	------

Heat transfer coefficient, W/K $(39)m = (37) + (38)m$

(39)m=	66.56	66.3	66.04	64.75	64.49	63.19	63.19	62.93	63.71	64.49	65.01	65.53	Average = Sum(39) _{1...12} / 12 = 64.68 (39)
--------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	---

Heat loss parameter (HLP), W/m²K $(40)m = (39)m ÷ (4)$

(40)m=	0.82	0.82	0.82	0.8	0.8	0.78	0.78	0.78	0.79	0.8	0.81	0.81	Average = Sum(40) _{1...12} / 12 = 0.8 (40)
--------	------	------	------	-----	-----	------	------	------	------	-----	------	------	---

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	(41)
31	28	31	30	31	30	31	31	30	31	30	31	

4. Water heating energy requirement: kWh/year:

Assumed occupancy, N 2.48 (42)

if TFA > 13.9, $N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$

if TFA £ 13.9, $N = 1$

Annual average hot water usage in litres per day $Vd,average = (25 \times N) + 36$ 93 (43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Hot water usage in litres per day for each month $Vd,m = \text{factor from Table 1c} \times (43)$

(44)m=	102.3	98.58	94.86	91.14	87.42	83.7	83.7	87.42	91.14	94.86	98.58	102.3	Total = Sum(44) _{1...12} = 1116.01 (44)
--------	-------	-------	-------	-------	-------	------	------	-------	-------	-------	-------	-------	--

Energy content of hot water used - calculated monthly = $4.190 \times Vd,m \times nm \times DTm / 3600 \text{ kWh/month}$ (see Tables 1b, 1c, 1d)

(45)m=	151.71	132.69	136.92	119.37	114.54	98.84	91.59	105.1	106.35	123.94	135.3	146.92	Total = Sum(45) _{1...12} = 1463.26 (45)
--------	--------	--------	--------	--------	--------	-------	-------	-------	--------	--------	-------	--------	--

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	22.76	19.9	20.54	17.91	17.18	14.83	13.74	15.76	15.95	18.59	20.29	22.04	(46)
--------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel 0 (47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day): 0 (48)

Temperature factor from Table 2b 0 (49)

Energy lost from water storage, kWh/year (48) x (49) = 0 (50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day) 0 (51)

If community heating see section 4.3

Volume factor from Table 2a 0 (52)

Temperature factor from Table 2b 0 (53)

Energy lost from water storage, kWh/year (47) x (51) x (52) x (53) = 0 (54)

Enter (50) or (54) in (55)

Water storage loss calculated for each month ((56)m = (55) x (41)m)

(56)m=	0	0	0	0	0	0	0	0	0	0	0	0	(56)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

If cylinder contains dedicated solar storage, $(57)m = (56)m \times [(50) - (H11)] \div (50)$, else $(57)m = (56)m$ where (H11) is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0	(57)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

SAP WorkSheet: New dwelling design stage

Primary circuit loss (annual) from Table 3

0

(58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=	33	29.79	32.96	31.87	32.91	31.83	32.88	32.9	31.85	32.94	31.91	32.99
--------	----	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=	184.71	162.48	169.88	151.24	147.45	130.67	124.46	138	138.21	156.89	167.21	179.91
--------	--------	--------	--------	--------	--------	--------	--------	-----	--------	--------	--------	--------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

Output from water heater

(64)m=	184.71	162.48	169.88	151.24	147.45	130.67	124.46	138	138.21	156.89	167.21	179.91
Output from water heater (annual) _{1...12}											1851.11	(64)

Heat gains from water heating, kWh/month 0.25 × [0.85 × (45)m + (61)m] + 0.8 × [(46)m + (57)m + (59)m]

(65)m=	58.69	51.57	53.77	47.66	46.31	40.82	38.67	43.17	43.33	49.45	52.96	57.1
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(66)m=	148.55	148.55	148.55	148.55	148.55	148.55	148.55	148.55	148.55	148.55	148.55	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	52.5	46.63	37.92	28.71	21.46	18.12	19.58	25.45	34.15	43.37	50.61	53.96
--------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	329.67	333.09	324.47	306.11	282.95	261.18	246.63	243.21	251.83	270.18	293.35	315.12
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	52.33	52.33	52.33	52.33	52.33	52.33	52.33	52.33	52.33	52.33	52.33	(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	(70)
--------	---	---	---	---	---	---	---	---	---	---	---	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	-99.03	(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Water heating gains (Table 5)

(72)m=	78.89	76.74	72.27	66.19	62.25	56.7	51.98	58.02	60.17	66.46	73.56	76.75
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=	565.9	561.3	539.5	505.86	471.5	440.84	423.03	431.53	451.01	484.86	522.37	550.67
--------	-------	-------	-------	--------	-------	--------	--------	--------	--------	--------	--------	--------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
North	0.9x	0.77	x 1.03	x 10.63	x 0.5	x 0.7 = 2.66
North	0.9x	0.77	x 2.61	x 10.63	x 0.5	x 0.72 = 6.92

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	2.61	x	10.63	x	0.5	x	0.72	=	6.92	(74)
North	0.9x	0.77	x	1.03	x	20.32	x	0.5	x	0.7	=	5.08	(74)
North	0.9x	0.77	x	2.61	x	20.32	x	0.5	x	0.72	=	13.23	(74)
North	0.9x	0.77	x	2.61	x	20.32	x	0.5	x	0.72	=	13.23	(74)
North	0.9x	0.77	x	1.03	x	34.53	x	0.5	x	0.7	=	8.63	(74)
North	0.9x	0.77	x	2.61	x	34.53	x	0.5	x	0.72	=	22.48	(74)
North	0.9x	0.77	x	2.61	x	34.53	x	0.5	x	0.72	=	22.48	(74)
North	0.9x	0.77	x	1.03	x	55.46	x	0.5	x	0.7	=	13.86	(74)
North	0.9x	0.77	x	2.61	x	55.46	x	0.5	x	0.72	=	36.12	(74)
North	0.9x	0.77	x	2.61	x	55.46	x	0.5	x	0.72	=	36.12	(74)
North	0.9x	0.77	x	1.03	x	74.72	x	0.5	x	0.7	=	18.67	(74)
North	0.9x	0.77	x	2.61	x	74.72	x	0.5	x	0.72	=	48.65	(74)
North	0.9x	0.77	x	2.61	x	74.72	x	0.5	x	0.72	=	48.65	(74)
North	0.9x	0.77	x	1.03	x	79.99	x	0.5	x	0.7	=	19.98	(74)
North	0.9x	0.77	x	2.61	x	79.99	x	0.5	x	0.72	=	52.08	(74)
North	0.9x	0.77	x	2.61	x	79.99	x	0.5	x	0.72	=	52.08	(74)
North	0.9x	0.77	x	1.03	x	74.68	x	0.5	x	0.7	=	18.66	(74)
North	0.9x	0.77	x	2.61	x	74.68	x	0.5	x	0.72	=	48.63	(74)
North	0.9x	0.77	x	2.61	x	74.68	x	0.5	x	0.72	=	48.63	(74)
North	0.9x	0.77	x	1.03	x	59.25	x	0.5	x	0.7	=	14.8	(74)
North	0.9x	0.77	x	2.61	x	59.25	x	0.5	x	0.72	=	38.58	(74)
North	0.9x	0.77	x	2.61	x	59.25	x	0.5	x	0.72	=	38.58	(74)
North	0.9x	0.77	x	1.03	x	41.52	x	0.5	x	0.7	=	10.37	(74)
North	0.9x	0.77	x	2.61	x	41.52	x	0.5	x	0.72	=	27.03	(74)
North	0.9x	0.77	x	2.61	x	41.52	x	0.5	x	0.72	=	27.03	(74)
North	0.9x	0.77	x	1.03	x	24.19	x	0.5	x	0.7	=	6.04	(74)
North	0.9x	0.77	x	2.61	x	24.19	x	0.5	x	0.72	=	15.75	(74)
North	0.9x	0.77	x	2.61	x	24.19	x	0.5	x	0.72	=	15.75	(74)
North	0.9x	0.77	x	1.03	x	13.12	x	0.5	x	0.7	=	3.28	(74)
North	0.9x	0.77	x	2.61	x	13.12	x	0.5	x	0.72	=	8.54	(74)
North	0.9x	0.77	x	2.61	x	13.12	x	0.5	x	0.72	=	8.54	(74)
North	0.9x	0.77	x	1.03	x	8.86	x	0.5	x	0.7	=	2.21	(74)
North	0.9x	0.77	x	2.61	x	8.86	x	0.5	x	0.72	=	5.77	(74)
North	0.9x	0.77	x	2.61	x	8.86	x	0.5	x	0.72	=	5.77	(74)
South	0.9x	0.54	x	1.41	x	46.75	x	0.5	x	0.7	=	11.21	(78)
South	0.9x	0.54	x	1.41	x	76.57	x	0.5	x	0.7	=	18.36	(78)
South	0.9x	0.54	x	1.41	x	97.53	x	0.5	x	0.7	=	23.39	(78)
South	0.9x	0.54	x	1.41	x	110.23	x	0.5	x	0.7	=	26.44	(78)
South	0.9x	0.54	x	1.41	x	114.87	x	0.5	x	0.7	=	27.55	(78)
South	0.9x	0.54	x	1.41	x	110.55	x	0.5	x	0.7	=	26.51	(78)
South	0.9x	0.54	x	1.41	x	108.01	x	0.5	x	0.7	=	25.91	(78)

SAP WorkSheet: New dwelling design stage

South	0.9x	0.54	x	1.41	x	104.89	x	0.5	x	0.7	=	25.16	(78)
South	0.9x	0.54	x	1.41	x	101.89	x	0.5	x	0.7	=	24.44	(78)
South	0.9x	0.54	x	1.41	x	82.59	x	0.5	x	0.7	=	19.81	(78)
South	0.9x	0.54	x	1.41	x	55.42	x	0.5	x	0.7	=	13.29	(78)
South	0.9x	0.54	x	1.41	x	40.4	x	0.5	x	0.7	=	9.69	(78)
Southwest	0.9x	0.54	x	5.46	x	36.79		0.5	x	0.73	=	35.64	(79)
Southwest	0.9x	0.54	x	1.41	x	36.79		0.5	x	0.7	=	8.82	(79)
Southwest	0.9x	0.54	x	5.46	x	62.67		0.5	x	0.73	=	60.7	(79)
Southwest	0.9x	0.54	x	1.41	x	62.67		0.5	x	0.7	=	15.03	(79)
Southwest	0.9x	0.54	x	5.46	x	85.75		0.5	x	0.73	=	83.06	(79)
Southwest	0.9x	0.54	x	1.41	x	85.75		0.5	x	0.7	=	20.57	(79)
Southwest	0.9x	0.54	x	5.46	x	106.25		0.5	x	0.73	=	102.91	(79)
Southwest	0.9x	0.54	x	1.41	x	106.25		0.5	x	0.7	=	25.48	(79)
Southwest	0.9x	0.54	x	5.46	x	119.01		0.5	x	0.73	=	115.27	(79)
Southwest	0.9x	0.54	x	1.41	x	119.01		0.5	x	0.7	=	28.54	(79)
Southwest	0.9x	0.54	x	5.46	x	118.15		0.5	x	0.73	=	114.43	(79)
Southwest	0.9x	0.54	x	1.41	x	118.15		0.5	x	0.7	=	28.34	(79)
Southwest	0.9x	0.54	x	5.46	x	113.91		0.5	x	0.73	=	110.33	(79)
Southwest	0.9x	0.54	x	1.41	x	113.91		0.5	x	0.7	=	27.32	(79)
Southwest	0.9x	0.54	x	5.46	x	104.39		0.5	x	0.73	=	101.11	(79)
Southwest	0.9x	0.54	x	1.41	x	104.39		0.5	x	0.7	=	25.04	(79)
Southwest	0.9x	0.54	x	5.46	x	92.85		0.5	x	0.73	=	89.93	(79)
Southwest	0.9x	0.54	x	1.41	x	92.85		0.5	x	0.7	=	22.27	(79)
Southwest	0.9x	0.54	x	5.46	x	69.27		0.5	x	0.73	=	67.09	(79)
Southwest	0.9x	0.54	x	1.41	x	69.27		0.5	x	0.7	=	16.61	(79)
Southwest	0.9x	0.54	x	5.46	x	44.07		0.5	x	0.73	=	42.68	(79)
Southwest	0.9x	0.54	x	1.41	x	44.07		0.5	x	0.7	=	10.57	(79)
Southwest	0.9x	0.54	x	5.46	x	31.49		0.5	x	0.73	=	30.5	(79)
Southwest	0.9x	0.54	x	1.41	x	31.49		0.5	x	0.7	=	7.55	(79)

Solar gains in watts, calculated for each month

$$(83)m = \text{Sum}(74)m \dots (82)m$$

$$(83)m = 72.18 \quad 125.64 \quad 180.61 \quad 240.92 \quad 287.33 \quad 293.43 \quad 279.46 \quad 243.26 \quad 201.08 \quad 141.05 \quad 86.91 \quad 61.5 \quad (83)$$

Total gains – internal and solar $(84)m = (73)m + (83)m$, watts

$$(84)m = 638.08 \quad 686.94 \quad 720.11 \quad 746.78 \quad 758.83 \quad 734.27 \quad 702.49 \quad 674.79 \quad 652.08 \quad 625.91 \quad 609.28 \quad 612.17 \quad (84)$$

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 ($^{\circ}\text{C}$)

21

(85)

Utilisation factor for gains for living area, $h1,m$ (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(86)m=	0.92	0.9	0.86	0.79	0.67	0.51	0.39	0.41	0.6	0.79	0.89	0.93	

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

$$(87)m= 19.69 \quad 19.88 \quad 20.16 \quad 20.51 \quad 20.77 \quad 20.93 \quad 20.98 \quad 20.98 \quad 20.88 \quad 20.56 \quad 20.09 \quad 19.67 \quad (87)$$

Temperature during heating periods in rest of dwelling from Table 9, Th2 ($^{\circ}\text{C}$)

$$(88)m= 20.23 \quad 20.23 \quad 20.24 \quad 20.25 \quad 20.25 \quad 20.27 \quad 20.27 \quad 20.27 \quad 20.26 \quad 20.25 \quad 20.25 \quad 20.24 \quad (88)$$

SAP WorkSheet: New dwelling design stage

Utilisation factor for gains for rest of dwelling, h_{2,m} (see Table 9a)

(89)m=	0.91	0.89	0.85	0.76	0.63	0.46	0.32	0.35	0.55	0.77	0.88	0.92		(89)
--------	------	------	------	------	------	------	------	------	------	------	------	------	--	------

Mean internal temperature in the rest of dwelling T₂ (follow steps 3 to 7 in Table 9c)

(90)m=	19.04	19.22	19.49	19.83	20.08	20.22	20.26	20.26	20.18	19.89	19.44	19.02		(90)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

$$f_{LA} = \text{Living area} \div (4) = 0.39$$

(91)

Mean internal temperature (for the whole dwelling) = f_{LA} × T₁ + (1 – f_{LA}) × T₂

(92)m=	19.29	19.47	19.75	20.09	20.35	20.5	20.54	20.53	20.45	20.15	19.69	19.27		(92)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	--	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.29	19.47	19.75	20.09	20.35	20.5	20.54	20.53	20.45	20.15	19.69	19.27		(93)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	--	------

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that T_{i,m}=(76)m and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, h_m:

(94)m=	0.9	0.88	0.83	0.76	0.64	0.48	0.35	0.38	0.57	0.76	0.87	0.91		(94)
--------	-----	------	------	------	------	------	------	------	------	------	------	------	--	------

Useful gains, h_{mGm}, W = (94)m × (84)m

(95)m=	574.67	601.48	600.4	564.71	485.23	352.92	243.84	253.67	369.04	477.05	527.5	556.5		(95)
--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	-------	-------	--	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2		(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	--	------

Heat loss rate for mean internal temperature, L_m, W = [(39)m × [(93)m – (96)m]]

(97)m=	997.96	966.24	874.87	724.66	557.53	372.68	248.78	260.19	404.63	615.96	818.7	987.47		(97)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--	------

Space heating requirement for each month, kWh/month = 0.024 × [(97)m – (95)m] × (41)m

(98)m=	314.92	245.12	204.2	115.17	53.79	0	0	0	0	103.35	209.67	320.64		
--------	--------	--------	-------	--------	-------	---	---	---	---	--------	--------	--------	--	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1...5,9...12} = 1566.86$$

(98)

Space heating requirement in kWh/m²/year

19.42

(99)

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system

0

(201)

Fraction of space heat from main system(s) (202) = 1 – (201) =

1

(202)

Fraction of total heating from main system 1 (204) = (202) × [1 – (203)] =

1

(204)

Efficiency of main space heating system 1

90.5

(206)

Efficiency of secondary/supplementary heating system, %

0

(208)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

314.92	245.12	204.2	115.17	53.79	0	0	0	0	103.35	209.67	320.64	
--------	--------	-------	--------	-------	---	---	---	---	--------	--------	--------	--

$$(211)m = \{(98)m \times (204)\} \times 100 \div (206)$$

347.98	270.85	225.64	127.26	59.44	0	0	0	0	114.2	231.67	354.3	
--------	--------	--------	--------	-------	---	---	---	---	-------	--------	-------	--

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1...5,10...12} = 1731.33$$

(211)

Space heating fuel (secondary), kWh/month

= {(98)m × (201)} × 100 ÷ (208)

0	0	0	0	0	0	0	0	0	0	0	0	
---	---	---	---	---	---	---	---	---	---	---	---	--

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1...5,10...12} = 0$$

(215)

SAP WorkSheet: New dwelling design stage

Water heating

Output from water heater (calculated above)

184.71	162.48	169.88	151.24	147.45	130.67	124.46	138	138.21	156.89	167.21	179.91		
(217)m=	89.02	88.9	88.69	88.24	87.61	86.6	86.6	86.6	86.6	88.11	88.73	89.06	(217)

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

207.49	182.76	191.55	171.39	168.31	150.89	143.72	159.35	159.59	178.06	188.45	202.02	
Total = Sum(219a) _{1...12} =											2103.59	(219)

Annual totals

Space heating fuel used, main system 1

kWh/year

1731.33

Water heating fuel used

2103.59

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

198.36 (230a)

central heating pump:

30 (230c)

boiler with a fan-assisted flue

45 (230e)

Total electricity for the above, kWh/year

sum of (230a)...(230g) =

273.36 (231)

Electricity for lighting

370.86 (232)

Electricity generated by PVs

-431.81 (233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year (211) x	Fuel Price (Table 12)	Fuel Cost £/year x 0.01 =
Space heating - main system 1	(211) x	3.48	60.25 (240)
Space heating - main system 2	(213) x	0	0 (241)
Space heating - secondary	(215) x	13.19	0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 73.2 (247)
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 36.06 (249)
(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)			
Energy for lighting	(232)	13.19	x 0.01 = 48.92 (250)
Additional standing charges (Table 12)			120 (251)
	one of (233) to (235) x	13.19	x 0.01 = 0 (252)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost (245)...(247) + (250)...(254) = 338.43 (255)

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)	0.42 (256)
Energy cost factor (ECF)	$[(255) \times (256)] \div [(4) + 45.0] = 1.13$ (257)
SAP rating (Section 12)	84.22 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

SAP WorkSheet: New dwelling design stage

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 373.97 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 454.38 (264)
Space and water heating	(261) + (262) + (263) + (264) =		828.34 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 141.87 (267)
Electricity for lighting	(232) x	0.519	= 192.47 (268)
Energy saving/generation technologies			
Item 1		0.519	= -224.11 (269)
Total CO2, kg/year		sum of (265)...(271) =	938.58 (272)
CO2 emissions per m²		(272) ÷ (4) =	11.63 (273)
EI rating (section 14)			90 (274)

13a. Primary Energy

DRA

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 2112.23 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2566.38 (264)
Space and water heating	(261) + (262) + (263) + (264) =		4678.61 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 839.22 (267)
Electricity for lighting	(232) x	0	= 1138.52 (268)
Energy saving/generation technologies			
Item 1		3.07	= -1325.66 (269)
'Total Primary Energy		sum of (265)...(271) =	5330.69 (272)
Primary energy kWh/m²/year		(272) ÷ (4) =	66.06 (273)

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 3-2

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	63.11 (1a)	x (2a)	= 164.09 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	63.11 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n)	= 164.09 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+ 0	+ 0	= 0	x 40 = 0 (6a)
Number of open flues	0	+ 0	+ 0	= 0	x 20 = 0 (6b)
Number of intermittent fans					x 10 = 0 (7a)
Number of passive vents					x 10 = 0 (7b)
Number of flueless gas fires					x 40 = 0 (7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) = 0					÷ (5) = 0 (8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)					
Number of storeys in the dwelling (ns)					
Additional infiltration					
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					

If both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area $[(18) = [(17) \div 20] + (8), \text{ otherwise } (18) = (16)]$

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

$(20) = 1 - [0.075 \times (19)] =$

Infiltration rate incorporating shelter factor

$(21) = (18) \times (20) =$

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7

Wind Factor (22a)m = (22)m ÷ 4

(22)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			2.61	x 1/[1/(1)+ 0.04] =	2.51		
Windows Type 2			2.61	x 1/[1/(1)+ 0.04] =	2.51		
Windows Type 3			3.25	x 1/[1/(1)+ 0.04] =	3.12		
Windows Type 4			2.89	x 1/[1/(1)+ 0.04] =	2.78		
Walls Type1	33.54	8.47	25.07	x 0.13 =	3.26		
Walls Type2	9.1	2.89	6.21	x 0.13 =	0.81		
Roof	42.42	0	42.42	x 0.2 =	8.48		
Total area of elements, m ²			85.06				

* for windows and roof windows, use effective window U-value calculated using formula $1/[1/(U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U)

(26)...(30) + (32) = 23.47 (33)

Heat capacity Cm = S(A x k)

((28)...(30) + (32) + (32a)...(32e) = 819.7 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K

Indicative Value: Low 100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K

13.96 (36)

if details of thermal bridging are not known (36) = 0.15 x (31)

Total fabric heat loss

(33) + (36) = 37.43 (37)

Ventilation heat loss calculated monthly

(38)m = 0.33 × (25)m x (5)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
(38)m=	16.72	16.52	16.31	15.3	15.09	14.08	14.08	13.88	14.48	15.09	15.5	15.91

Heat transfer coefficient, W/K

(39)m = (37) + (38)m

(39)m=	54.15	53.95	53.74	52.73	52.53	51.51	51.51	51.31	51.92	52.53	52.93	53.34
Average = Sum(39) _{1...12} /12=	52.68 (39)											

SAP WorkSheet: New dwelling design stage

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m=	0.86	0.85	0.85	0.84	0.83	0.82	0.82	0.81	0.82	0.82	0.83	0.84	0.85	Average = Sum(40) _{1...12} /12=	0.83	(40)
--------	------	------	------	------	------	------	------	------	------	------	------	------	------	--	------	------

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	(41)m=	31	28	31	30	31	30	31	31	30	31	31	(41)
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	--------	----	----	----	----	----	----	----	----	----	----	----	------

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

2.07

(42)

if TFA > 13.9, $N = 1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$

if TFA £ 13.9, $N = 1$

Annual average hot water usage in litres per day $Vd,\text{average} = (25 \times N) + 36$

83.32

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Hot water usage in litres per day for each month $Vd,m = \text{factor from Table 1c} \times (43)$

(44)m=	91.65	88.32	84.98	81.65	78.32	74.98	74.98	78.32	81.65	84.98	88.32	91.65	Total = Sum(44) _{1...12} =	999.8	(44)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------------------------------------	-------	------

Energy content of hot water used - calculated monthly = $4.190 \times Vd,m \times nm \times DTm / 3600 \text{ kWh/month}$ (see Tables 1b, 1c, 1d)

(45)m=	135.91	118.87	122.66	106.94	102.61	88.55	82.05	94.15	95.28	111.04	121.21	131.62	Total = Sum(45) _{1...12} =	1310.89	(45)
--------	--------	--------	--------	--------	--------	-------	-------	-------	-------	--------	--------	--------	-------------------------------------	---------	------

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m=	20.39	17.83	18.4	16.04	15.39	13.28	12.31	14.12	14.29	16.66	18.18	19.74
--------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year

$$(48) \times (49) =$$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

0

(51)

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(52)

If community heating see section 4.3

0

(53)

Volume factor from Table 2a

0

(54)

Temperature factor from Table 2b

0

(55)

Energy lost from water storage, kWh/year

$$(47) \times (51) \times (52) \times (53) =$$

0

(56)

Enter (50) or (54) in (55)

0

(57)

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m)$$

(56)m=

0	0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---	---

If cylinder contains dedicated solar storage, $(57)m = (56)m \times [(50) - (H11)] \div (50)$, else $(57)m = (56)m$ where (H11) is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

Primary circuit loss (annual) from Table 3

0

(58)

Primary circuit loss calculated for each month $(59)m = (58) \div 365 \times (41)m$

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0
--------	---	---	---	---	---	---	---	---	---	---	---	---

SAP WorkSheet: New dwelling design stage

Combi loss calculated for each month (61)m = $(60) \div 365 \times (41)m$

(61)m=	32.95	29.75	32.92	31.84	32.88	31.8	32.85	32.87	31.82	32.91	31.87	32.95		(61)
--------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	--	------

Total heat required for water heating calculated for each month (62)m = $0.85 \times (45)m + (46)m + (57)m + (59)m + (61)m$

(62)m=	168.87	148.62	155.58	138.78	135.49	120.35	114.9	127.03	127.1	143.94	153.08	164.57		(62)
--------	--------	--------	--------	--------	--------	--------	-------	--------	-------	--------	--------	--------	--	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0		(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Output from water heater

(64)m=	168.87	148.62	155.58	138.78	135.49	120.35	114.9	127.03	127.1	143.94	153.08	164.57		
	Output from water heater (annual) 1...12												1698.31	(64)

Heat gains from water heating, kWh/month $0.25 \times [0.85 \times (45)m + (61)m] + 0.8 \times [(46)m + (57)m + (59)m]$

(65)m=	53.43	46.96	49.02	43.52	42.34	37.39	35.5	39.52	39.64	45.15	48.27	52		(65)
--------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	----	--	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	124.08	124.08	124.08	124.08	124.08	124.08	124.08	124.08	124.08	124.08	124.08	124.08		(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	42.26	37.54	30.53	23.11	17.28	14.59	15.76	20.49	27.5	34.91	40.75	43.44		(67)
--------	-------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	--	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	269.73	272.53	265.47	250.46	231.5	213.69	201.79	198.99	206.04	221.06	240.01	257.83		(68)
--------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	--------	--------	--	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	49.48	49.48	49.48	49.48	49.48	49.48	49.48	49.48	49.48	49.48	49.48	49.48		(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3		(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	--	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72	-82.72		(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--	------

Water heating gains (Table 5)

(72)m=	71.81	69.88	65.88	60.44	56.91	51.93	47.71	53.12	55.05	60.68	67.04	69.89		(72)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	--	------

Total internal gains = $(66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m$

(73)m=	477.64	473.79	455.72	427.85	399.52	374.05	359.09	366.44	382.43	410.49	441.64	465		(73)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-----	--	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
North	0.9x	0.77	x 2.61	x 10.63	x 0.5	x 0.72 = 6.92
North	0.9x	0.77	x 2.61	x 10.63	x 0.5	x 0.72 = 6.92
North	0.9x	0.77	x 3.25	x 10.63	x 0.5	x 0.72 = 8.62
North	0.9x	0.77	x 2.61	x 20.32	x 0.5	x 0.72 = 13.23
North	0.9x	0.77	x 2.61	x 20.32	x 0.5	x 0.72 = 13.23

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	3.25	x	20.32	x	0.5	x	0.72	=	16.48	(74)
North	0.9x	0.77	x	2.61	x	34.53	x	0.5	x	0.72	=	22.48	(74)
North	0.9x	0.77	x	2.61	x	34.53	x	0.5	x	0.72	=	22.48	(74)
North	0.9x	0.77	x	3.25	x	34.53	x	0.5	x	0.72	=	28	(74)
North	0.9x	0.77	x	2.61	x	55.46	x	0.5	x	0.72	=	36.12	(74)
North	0.9x	0.77	x	2.61	x	55.46	x	0.5	x	0.72	=	36.12	(74)
North	0.9x	0.77	x	3.25	x	55.46	x	0.5	x	0.72	=	44.97	(74)
North	0.9x	0.77	x	2.61	x	74.72	x	0.5	x	0.72	=	48.65	(74)
North	0.9x	0.77	x	2.61	x	74.72	x	0.5	x	0.72	=	48.65	(74)
North	0.9x	0.77	x	3.25	x	74.72	x	0.5	x	0.72	=	60.58	(74)
North	0.9x	0.77	x	2.61	x	79.99	x	0.5	x	0.72	=	52.08	(74)
North	0.9x	0.77	x	2.61	x	79.99	x	0.5	x	0.72	=	52.08	(74)
North	0.9x	0.77	x	3.25	x	79.99	x	0.5	x	0.72	=	64.85	(74)
North	0.9x	0.77	x	2.61	x	74.68	x	0.5	x	0.72	=	48.63	(74)
North	0.9x	0.77	x	2.61	x	74.68	x	0.5	x	0.72	=	48.63	(74)
North	0.9x	0.77	x	3.25	x	74.68	x	0.5	x	0.72	=	60.55	(74)
North	0.9x	0.77	x	2.61	x	59.25	x	0.5	x	0.72	=	38.58	(74)
North	0.9x	0.77	x	2.61	x	59.25	x	0.5	x	0.72	=	38.58	(74)
North	0.9x	0.77	x	3.25	x	59.25	x	0.5	x	0.72	=	48.04	(74)
North	0.9x	0.77	x	2.61	x	41.52	x	0.5	x	0.72	=	27.03	(74)
North	0.9x	0.77	x	2.61	x	41.52	x	0.5	x	0.72	=	27.03	(74)
North	0.9x	0.77	x	3.25	x	41.52	x	0.5	x	0.72	=	33.66	(74)
North	0.9x	0.77	x	2.61	x	24.19	x	0.5	x	0.72	=	15.75	(74)
North	0.9x	0.77	x	2.61	x	24.19	x	0.5	x	0.72	=	15.75	(74)
North	0.9x	0.77	x	3.25	x	24.19	x	0.5	x	0.72	=	19.61	(74)
North	0.9x	0.77	x	2.61	x	13.12	x	0.5	x	0.72	=	8.54	(74)
North	0.9x	0.77	x	2.61	x	13.12	x	0.5	x	0.72	=	8.54	(74)
North	0.9x	0.77	x	3.25	x	13.12	x	0.5	x	0.72	=	10.64	(74)
North	0.9x	0.77	x	2.61	x	8.86	x	0.5	x	0.72	=	5.77	(74)
North	0.9x	0.77	x	2.61	x	8.86	x	0.5	x	0.72	=	5.77	(74)
North	0.9x	0.77	x	3.25	x	8.86	x	0.5	x	0.72	=	7.19	(74)
South	0.9x	0.54	x	2.89	x	46.75	x	0.5	x	0.75	=	24.62	(78)
South	0.9x	0.54	x	2.89	x	76.57	x	0.5	x	0.75	=	40.33	(78)
South	0.9x	0.54	x	2.89	x	97.53	x	0.5	x	0.75	=	51.37	(78)
South	0.9x	0.54	x	2.89	x	110.23	x	0.5	x	0.75	=	58.06	(78)
South	0.9x	0.54	x	2.89	x	114.87	x	0.5	x	0.75	=	60.5	(78)
South	0.9x	0.54	x	2.89	x	110.55	x	0.5	x	0.75	=	58.23	(78)
South	0.9x	0.54	x	2.89	x	108.01	x	0.5	x	0.75	=	56.89	(78)
South	0.9x	0.54	x	2.89	x	104.89	x	0.5	x	0.75	=	55.25	(78)
South	0.9x	0.54	x	2.89	x	101.89	x	0.5	x	0.75	=	53.66	(78)
South	0.9x	0.54	x	2.89	x	82.59	x	0.5	x	0.75	=	43.5	(78)

SAP WorkSheet: New dwelling design stage

South	$0.9 \times$	0.54	\times	2.89	\times	55.42	\times	0.5	\times	0.75	=	29.19	(78)
South	$0.9 \times$	0.54	\times	2.89	\times	40.4	\times	0.5	\times	0.75	=	21.28	(78)

Solar gains in watts, calculated for each month $(83)m = \text{Sum}(74)m \dots (82)m$

(83)m=	47.09	83.27	124.34	175.26	218.38	227.24	214.69	180.44	141.39	94.61	56.91	40.01	(83)
--------	-------	-------	--------	--------	--------	--------	--------	--------	--------	-------	-------	-------	------

Total gains – internal and solar $(84)m = (73)m + (83)m$, watts

(84)m=	524.74	557.06	580.06	603.11	617.91	601.29	573.78	546.88	523.82	505.1	498.54	505.01	(84)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-------	--------	--------	------

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 ($^{\circ}\text{C}$)

21 (85)

Utilisation factor for gains for living area, h1,m (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		(86)
(86)m=	0.92	0.9	0.86	0.78	0.67	0.51	0.38	0.42	0.61	0.79	0.89	0.92	

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

(87)m=	19.67	19.83	20.11	20.47	20.76	20.93	20.98	20.97	20.87	20.54	20.07	19.64	(87)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Temperature during heating periods in rest of dwelling from Table 9, Th2 ($^{\circ}\text{C}$)

(88)m=	20.2	20.21	20.21	20.22	20.23	20.24	20.24	20.24	20.23	20.23	20.22	20.21	(88)
--------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Utilisation factor for gains for rest of dwelling, h2,m (see Table 9a)

(89)m=	0.91	0.88	0.84	0.76	0.63	0.46	0.32	0.35	0.55	0.76	0.87	0.91	(89)
--------	------	------	------	------	------	------	------	------	------	------	------	------	------

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

(90)m=	18.99	19.15	19.43	19.78	20.04	20.19	20.23	20.23	20.14	19.84	19.39	18.97	(90)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

fLA = Living area ÷ (4) = 0.4 (91)

Mean internal temperature (for the whole dwelling) = fLA × T1 + (1 - fLA) × T2

(92)m=	19.26	19.42	19.7	20.05	20.32	20.48	20.53	20.52	20.43	20.12	19.66	19.24	(92)
--------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

(93)m=	19.26	19.42	19.7	20.05	20.32	20.48	20.53	20.52	20.43	20.12	19.66	19.24	(93)
--------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that $T_i,m=(76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Utilisation factor for gains, hm:

(94)m=	0.89	0.87	0.83	0.75	0.63	0.48	0.34	0.38	0.57	0.76	0.86	0.9	(94)
--------	------	------	------	------	------	------	------	------	------	------	------	-----	------

Useful gains, hmGm , W = (94)m × (84)m

(95)m=	468.58	484.99	481.82	454.25	392.16	286.14	197.81	205.63	297.45	383.55	428	455.08	(95)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	-----	--------	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2	(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	------

Heat loss rate for mean internal temperature, Lm , W = [(39)m × [(93)m - (96)m]

(97)m=	809.9	783.51	709.25	588.18	452.93	303.05	202.19	211.49	328.66	499.91	664.78	801.97	(97)
--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Space heating requirement for each month, kWh/month = 0.024 × [(97)m - (95)m] × (41)m

(98)m=	253.94	200.61	169.21	96.43	45.21	0	0	0	0	86.57	170.48	258.09	
--------	--------	--------	--------	-------	-------	---	---	---	---	-------	--------	--------	--

Total per year (kWh/year) = Sum(98)_{1...5,9...12} = 1280.55 (98)

Space heating requirement in kWh/m²/year 20.29 (99)

9a. Energy requirements – Individual heating systems including micro-CHP

Space heating:

Fraction of space heat from secondary/supplementary system 0 (201)

SAP WorkSheet: New dwelling design stage

Fraction of space heat from main system(s)	$(202) = 1 - (201) =$	1	(202)
Fraction of total heating from main system 1	$(204) = (202) \times [1 - (203)] =$	1	(204)
Efficiency of main space heating system 1		90.5	(206)
Efficiency of secondary/supplementary heating system, %		0	(208)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

253.94	200.61	169.21	96.43	45.21	0	0	0	0	86.57	170.48	258.09
--------	--------	--------	-------	-------	---	---	---	---	-------	--------	--------

$$(211)m = \{[(98)m \times (204)]\} \times 100 \div (206) \quad (211)$$

280.6	221.67	186.98	106.55	49.96	0	0	0	0	95.66	188.38	285.18
-------	--------	--------	--------	-------	---	---	---	---	-------	--------	--------

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1...5,10...12} = 1414.97 \quad (211)$$

Space heating fuel (secondary), kWh/month

$$= \{[(98)m \times (201)]\} \times 100 \div (208)$$

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1...5,10...12} = 0 \quad (215)$$

Water heating

Output from water heater (calculated above)

168.87	148.62	155.58	138.78	135.49	120.35	114.9	127.03	127.1	143.94	153.08	164.57
--------	--------	--------	--------	--------	--------	-------	--------	-------	--------	--------	--------

Efficiency of water heater

88.9	88.8	88.59	88.16	87.54	86.6	86.6	86.6	86.6	88.02	88.61	88.94
------	------	-------	-------	-------	------	------	------	------	-------	-------	-------

86.6

(216)

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

189.95	167.37	175.62	157.42	154.77	138.97	132.68	146.68	146.77	163.53	172.75	185.03
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

$$\text{Total} = \text{Sum}(219a)_{1...12} = 1931.55 \quad (219)$$

kWh/year

kWh/year

Annual totals

Space heating fuel used, main system 1

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

Water heating fuel used

0	0	0	0	0	0	0	0	0	0	0	0
---	---	---	---	---	---	---	---	---	---	---	---

1931.55

(219)

Electricity for pumps, fans and electric keep-hot

mechanical ventilation - balanced, extract or positive input from outside

150.14 (230a)

central heating pump:

30 (230c)

boiler with a fan-assisted flue

45 (230e)

Total electricity for the above, kWh/year

$$\text{sum of (230a)...(230g)} =$$

225.14

(231)

Electricity for lighting

298.56

(232)

Electricity generated by PVs

-336.81

(233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	x 0.01 = 49.24 (240)
Space heating - main system 2	(213) x	0	x 0.01 = 0 (241)
Space heating - secondary	(215) x	13.19	x 0.01 = 0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 67.22 (247)

SAP WorkSheet: New dwelling design stage

Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 =	29.7	(249)
(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a)					
Energy for lighting	(232)	13.19	x 0.01 =	39.38	(250)
Additional standing charges (Table 12)				120	(251)

one of (233) to (235) x 13.19 x 0.01 = 0 (252)

Appendix Q items: repeat lines (253) and (254) as needed

Total energy cost (245)...(247) + (250)...(254) = 305.54 (255)

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)	0.42 (256)
Energy cost factor (ECF)	[(255) x (256)] ÷ [(4) + 45.0] = 1.19 (257)
SAP rating (Section 12)	83.44 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x 0.216 = 305.63 (261)		
Space heating (secondary)	(215) x 0.519 = 0 (263)		
Water heating	(219) x 0.216 = 417.21 (264)		
Space and water heating	(261) + (262) + (263) + (264) = 722.85 (265)		
Electricity for pumps, fans and electric keep-hot	(231) x 0.519 = 116.85 (267)		
Electricity for lighting	(232) x 0.519 = 154.95 (268)		
Energy saving/generation technologies			
Item 1		0.519 = -174.81 (269)	
Total CO2, kg/year		sum of (265)...(271) = 819.84 (272)	
CO2 emissions per m²		(272) ÷ (4) = 12.99 (273)	
El rating (section 14)			90 (274)

13a. Primary Energy

	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x 1.22 = 1726.26 (261)		
Space heating (secondary)	(215) x 3.07 = 0 (263)		
Energy for water heating	(219) x 1.22 = 2356.49 (264)		
Space and water heating	(261) + (262) + (263) + (264) = 4082.75 (265)		
Electricity for pumps, fans and electric keep-hot	(231) x 3.07 = 691.18 (267)		
Electricity for lighting	(232) x 0 = 916.59 (268)		
Energy saving/generation technologies			
Item 1		3.07 = -1034.01 (269)	
'Total Primary Energy		sum of (265)...(271) = 4656.51 (272)	

SAP WorkSheet: New dwelling design stage

Primary energy kWh/m²/year

(272) ÷ (4) =

73.78

(273)

DRAFT

SAP WorkSheet: New dwelling design stage

User Details:

Assessor Name:

Software Name: Stroma FSAP 2012

Stroma Number:

Software Version:

Version: 1.0.1.25

Property Address: Flat 4-1

Address : 125 Clerkenwell Road, LONDON, EC1R 5DB

1. Overall dwelling dimensions:

	Area(m ²)	Av. Height(m)	Volume(m ³)
Ground floor	79.45 (1a)	x (2a)	= 206.57 (3a)
Total floor area TFA = (1a)+(1b)+(1c)+(1d)+(1e)+....(1n)	79.45 (4)		
Dwelling volume		(3a)+(3b)+(3c)+(3d)+(3e)+....(3n)	= 206.57 (5)

2. Ventilation rate:

	main heating	secondary heating	other	total	m ³ per hour
Number of chimneys	0	+	0	= 0	x 40 = 0 (6a)
Number of open flues	0	+	0	= 0	x 20 = 0 (6b)
Number of intermittent fans				= 0	x 10 = 0 (7a)
Number of passive vents				= 0	x 10 = 0 (7b)
Number of flueless gas fires				= 0	x 40 = 0 (7c)
Air changes per hour					
Infiltration due to chimneys, flues and fans = (6a)+(6b)+(7a)+(7b)+(7c) =				= 0	÷ (5) = 0 (8)
If a pressurisation test has been carried out or is intended, proceed to (17), otherwise continue from (9) to (16)					
Number of storeys in the dwelling (ns)					
Additional infiltration					
Structural infiltration: 0.25 for steel or timber frame or 0.35 for masonry construction					

If both types of wall are present, use the value corresponding to the greater wall area (after deducting areas of openings); if equal user 0.35

If suspended wooden floor, enter 0.2 (unsealed) or 0.1 (sealed), else enter 0

If no draught lobby, enter 0.05, else enter 0

Percentage of windows and doors draught stripped

Window infiltration $0.25 - [0.2 \times (14) \div 100] =$

Infiltration rate $(8) + (10) + (11) + (12) + (13) + (15) =$

Air permeability value, q50, expressed in cubic metres per hour per square metre of envelope area $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

If based on air permeability value, then $(18) = [(17) \div 20] + (8)$, otherwise $(18) = (16)$

Air permeability value applies if a pressurisation test has been done or a degree air permeability is being used

Number of sides sheltered

$(20) = 1 - [0.075 \times (19)] =$

Infiltration rate incorporating shelter factor

$(21) = (18) \times (20) =$

Infiltration rate modified for monthly wind speed

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

Monthly average wind speed from Table 7

(22)m=	5.1	5	4.9	4.4	4.3	3.8	3.8	3.7	4	4.3	4.5	4.7
--------	-----	---	-----	-----	-----	-----	-----	-----	---	-----	-----	-----

Wind Factor (22a)m = (22)m ÷ 4

(22a)m=	1.27	1.25	1.23	1.1	1.08	0.95	0.95	0.92	1	1.08	1.12	1.18
---------	------	------	------	-----	------	------	------	------	---	------	------	------

SAP WorkSheet: New dwelling design stage

Adjusted infiltration rate (allowing for shelter and wind speed) = (21a) x (22a)m

0.19	0.19	0.18	0.16	0.16	0.14	0.14	0.14	0.15	0.16	0.17	0.18
------	------	------	------	------	------	------	------	------	------	------	------

Calculate effective air change rate for the applicable case

If mechanical ventilation:

0.5 (23a)

If exhaust air heat pump using Appendix N, (23b) = (23a) × Fmv (equation (N5)) , otherwise (23b) = (23a)

0.5 (23b)

If balanced with heat recovery: efficiency in % allowing for in-use factor (from Table 4h) =

76.5 (23c)

a) If balanced mechanical ventilation with heat recovery (MVHR) (24a)m = (22b)m + (23b) × [1 – (23c) ÷ 100]

(24a)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
---------	------	-----	-----	------	------	------	------	------	------	------	------	------

b) If balanced mechanical ventilation without heat recovery (MV) (24b)m = (22b)m + (23b)

(24b)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

c) If whole house extract ventilation or positive input ventilation from outside

if (22b)m < 0.5 × (23b), then (24c) = (23b); otherwise (24c) = (22b)m + 0.5 × (23b)

(24c)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

d) If natural ventilation or whole house positive input ventilation from loft

if (22b)m = 1, then (24d)m = (22b)m otherwise (24d)m = 0.5 + [(22b)m² × 0.5]

(24d)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

Effective air change rate - enter (24a) or (24b) or (24c) or (24d) in box (25)

(25)m=	0.31	0.3	0.3	0.28	0.28	0.26	0.26	0.26	0.27	0.28	0.29	0.29
--------	------	-----	-----	------	------	------	------	------	------	------	------	------

3. Heat losses and heat loss parameter:

ELEMENT	Gross area (m ²)	Openings m ²	Net Area A ,m ²	U-value W/m ² K	A X U (W/K)	k-value kJ/m ² ·K	A X k kJ/K
Windows Type 1			3.18	x 1/[1/(1)+ 0.04] =	3.06		
Windows Type 2			3.18	x 1/[1/(1)+ 0.04] =	3.06		
Windows Type 3			3.18	x 1/[1/(1)+ 0.04] =	3.06		
Windows Type 4			6.5	x 1/[1/(1)+ 0.04] =	6.25		
Windows Type 5			3.18	x 1/[1/(1)+ 0.04] =	3.06		
Windows Type 6			1.14	x 1/[1/(1)+ 0.04] =	1.1		
Windows Type 7			1.14	x 1/[1/(1)+ 0.04] =	1.1		
Windows Type 8			1.14	x 1/[1/(1)+ 0.04] =	1.1		
Walls Type1	41.86	19.22	22.64	x 0.13 =	2.94		
Walls Type2	27.56	3.42	24.14	x 0.13 =	3.14		
Walls Type3	7.28	0	7.28	x 0.13 =	0.95		
Roof	79.34	0	79.34	x 0.17 =	13.49		
Total area of elements, m ²			156.04				

* for windows and roof windows, use effective window U-value calculated using formula $1/[1/(U\text{-value})+0.04]$ as given in paragraph 3.2

** include the areas on both sides of internal walls and partitions

Fabric heat loss, W/K = S (A x U) (26)...(30) + (32) =

42.28 (33)

Heat capacity Cm = S(A x k)

((28)...(30) + (32) + (32a)...(32e) =

1470.9 (34)

Thermal mass parameter (TMP = Cm ÷ TFA) in kJ/m²K

Indicative Value: Low

100 (35)

For design assessments where the details of the construction are not known precisely the indicative values of TMP in Table 1f can be used instead of a detailed calculation.

Thermal bridges : S (L x Y) calculated using Appendix K

13.92 (36)

SAP WorkSheet: New dwelling design stage

if details of thermal bridging are not known (36) = $0.15 \times (31)$

Total fabric heat loss

$$(33) + (36) =$$

56.21

(37)

Ventilation heat loss calculated monthly

$$(38)m = 0.33 \times (25)m \times (5)$$

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(38)m= 21.05	20.79	20.54	19.26	19	17.72	17.72	17.47	18.23	19	19.51	20.02

(38)

Heat transfer coefficient, W/K

$$(39)m = (37) + (38)m$$

(39)m= 77.25	77	76.74	75.46	75.21	73.93	73.93	73.67	74.44	75.21	75.72	76.23
--------------	----	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

75.4

(39)

Heat loss parameter (HLP), W/m²K

$$(40)m = (39)m \div (4)$$

(40)m= 0.97	0.97	0.97	0.95	0.95	0.93	0.93	0.93	0.94	0.95	0.95	0.96
-------------	------	------	------	------	------	------	------	------	------	------	------

$$\text{Average} = \text{Sum}(40)_{1 \dots 12} / 12 =$$

0.95

(40)

Number of days in month (Table 1a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
(41)m= 31	28	31	30	31	30	31	31	30	31	30	31

(41)

4. Water heating energy requirement:

kWh/year:

Assumed occupancy, N

2.45

(42)

if TFA > 13.9, N = $1 + 1.76 \times [1 - \exp(-0.000349 \times (\text{TFA} - 13.9)^2)] + 0.0013 \times (\text{TFA} - 13.9)$

if TFA £ 13.9, N = 1

Annual average hot water usage in litres per day Vd,average = $(25 \times N) + 36$

92.44

(43)

Reduce the annual average hot water usage by 5% if the dwelling is designed to achieve a water use target of not more than 125 litres per person per day (all water use, hot and cold)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Hot water usage in litres per day for each month Vd,m = factor from Table 1c x (43)											
(44)m= 101.69	97.99	94.29	90.59	86.9	83.2	83.2	86.9	90.59	94.29	97.99	101.69
Total = Sum(44) _{1\dots 12} = 1109.32											

(44)

Energy content of hot water used - calculated monthly = $4.190 \times Vd,m \times nm \times DTm / 3600$ kWh/month (see Tables 1b, 1c, 1d)

(45)m= 150.8	131.89	136.1	118.65	113.85	98.25	91.04	104.47	105.72	123.2	134.48	146.04
Total = Sum(45) _{1\dots 12} = 1454.49											

(45)

If instantaneous water heating at point of use (no hot water storage), enter 0 in boxes (46) to (61)

(46)m= 22.62	19.78	20.41	17.8	17.08	14.74	13.66	15.67	15.86	18.48	20.17	21.91
--------------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------

(46)

Water storage loss:

Storage volume (litres) including any solar or WWHRS storage within same vessel

0

(47)

If community heating and no tank in dwelling, enter 110 litres in (47)

Otherwise if no stored hot water (this includes instantaneous combi boilers) enter '0' in (47)

Water storage loss:

a) If manufacturer's declared loss factor is known (kWh/day):

0

(48)

Temperature factor from Table 2b

0

(49)

Energy lost from water storage, kWh/year $(48) \times (49) =$

0

(50)

b) If manufacturer's declared cylinder loss factor is not known:

Hot water storage loss factor from Table 2 (kWh/litre/day)

0

(51)

If community heating see section 4.3

Volume factor from Table 2a

0

(52)

Temperature factor from Table 2b

0

(53)

Energy lost from water storage, kWh/year $(47) \times (51) \times (52) \times (53) =$

0

(54)

Enter (50) or (54) in (55)

0

(55)

SAP WorkSheet: New dwelling design stage

Water storage loss calculated for each month

$$((56)m = (55) \times (41)m)$$

(56)m=	0	0	0	0	0	0	0	0	0	0	0	0	(56)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

If cylinder contains dedicated solar storage, (57)m = (56)m x [(50) – (H11)] ÷ (50), else (57)m = (56)m where (H11) is from Appendix H

(57)m=	0	0	0	0	0	0	0	0	0	0	0	0	(57)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Primary circuit loss (annual) from Table 3

0

(58)

Primary circuit loss calculated for each month (59)m = (58) ÷ 365 × (41)m

(modified by factor from Table H5 if there is solar water heating and a cylinder thermostat)

(59)m=	0	0	0	0	0	0	0	0	0	0	0	0	(59)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Combi loss calculated for each month (61)m = (60) ÷ 365 × (41)m

(61)m=	33	29.79	32.96	31.87	32.91	31.83	32.88	32.9	31.85	32.94	31.91	32.99	(61)
--------	----	-------	-------	-------	-------	-------	-------	------	-------	-------	-------	-------	------

Total heat required for water heating calculated for each month (62)m = 0.85 × (45)m + (46)m + (57)m + (59)m + (61)m

(62)m=	183.8	161.68	169.06	150.52	146.76	130.07	123.91	137.37	137.57	156.14	166.39	179.03	(62)
--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Solar DHW input calculated using Appendix G or Appendix H (negative quantity) (enter '0' if no solar contribution to water heating)

(add additional lines if FGHRs and/or WWHRS applies, see Appendix G)

(63)m=	0	0	0	0	0	0	0	0	0	0	0	0	(63)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Output from water heater

(64)m=	183.8	161.68	169.06	150.52	146.76	130.07	123.91	137.37	137.57	156.14	166.39	179.03	1842.31	(64)
--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	---------	------

Heat gains from water heating, kWh/month 0.25 [0.85 × (45)m + (61)m] + 0.8 × [(46)m + (57)m + (59)m]

(65)m=	58.39	51.3	53.49	47.42	46.08	40.62	38.49	42.96	43.11	49.2	52.69	56.81	(65)
--------	-------	------	-------	-------	-------	-------	-------	-------	-------	------	-------	-------	------

include (57)m in calculation of (65)m only if cylinder is in the dwelling or hot water is from community heating

5. Internal gains (see Table 5 and 5a):

Metabolic gains (Table 5), Watts

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(66)m=	147.14	147.14	147.14	147.14	147.14	147.14	147.14	147.14	147.14	147.14	147.14	147.14	(66)

Lighting gains (calculated in Appendix L, equation L9 or L9a), also see Table 5

(67)m=	48.65	43.21	35.14	26.6	19.89	16.79	18.14	23.58	31.65	40.19	46.91	50	(67)
--------	-------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	----	------

Appliances gains (calculated in Appendix L, equation L13 or L13a), also see Table 5

(68)m=	325.8	329.18	320.66	302.53	279.63	258.11	243.74	240.36	248.88	267.01	289.91	311.43	(68)
--------	-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Cooking gains (calculated in Appendix L, equation L15 or L15a), also see Table 5

(69)m=	52.17	52.17	52.17	52.17	52.17	52.17	52.17	52.17	52.17	52.17	52.17	52.17	(69)
--------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Pumps and fans gains (Table 5a)

(70)m=	3	3	3	3	3	3	3	3	3	3	3	3	(70)
--------	---	---	---	---	---	---	---	---	---	---	---	---	------

Losses e.g. evaporation (negative values) (Table 5)

(71)m=	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	-98.09	(71)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

Water heating gains (Table 5)

(72)m=	78.48	76.34	71.9	65.86	61.94	56.42	51.73	57.74	59.88	66.13	73.18	76.35	(72)
--------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	------

Total internal gains = (66)m + (67)m + (68)m + (69)m + (70)m + (71)m + (72)m

(73)m=	557.15	552.95	531.92	499.21	465.67	435.54	417.83	425.89	444.62	477.54	514.21	541.99	(73)
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	------

6. Solar gains:

Solar gains are calculated using solar flux from Table 6a and associated equations to convert to the applicable orientation.

SAP WorkSheet: New dwelling design stage

Orientation:	Access Factor Table 6d	Area m ²	Flux Table 6a	g_ Table 6b	FF Table 6c	Gains (W)
North	0.9x 0.77	x 3.18	x 10.63	x 0.5	x 0.67	= 7.85 (74)
North	0.9x 0.77	x 3.18	x 10.63	x 0.5	x 0.67	= 7.85 (74)
North	0.9x 0.77	x 3.18	x 10.63	x 0.5	x 0.67	= 7.85 (74)
North	0.9x 0.77	x 6.5	x 10.63	x 0.5	x 0.82	= 19.64 (74)
North	0.9x 0.77	x 3.18	x 10.63	x 0.5	x 0.67	= 7.85 (74)
North	0.9x 0.77	x 3.18	x 20.32	x 0.5	x 0.67	= 15 (74)
North	0.9x 0.77	x 3.18	x 20.32	x 0.5	x 0.67	= 15 (74)
North	0.9x 0.77	x 3.18	x 20.32	x 0.5	x 0.67	= 15 (74)
North	0.9x 0.77	x 6.5	x 20.32	x 0.5	x 0.82	= 37.53 (74)
North	0.9x 0.77	x 3.18	x 20.32	x 0.5	x 0.67	= 15 (74)
North	0.9x 0.77	x 3.18	x 34.53	x 0.5	x 0.67	= 25.49 (74)
North	0.9x 0.77	x 3.18	x 34.53	x 0.5	x 0.67	= 25.49 (74)
North	0.9x 0.77	x 3.18	x 34.53	x 0.5	x 0.67	= 25.49 (74)
North	0.9x 0.77	x 6.5	x 34.53	x 0.5	x 0.82	= 63.77 (74)
North	0.9x 0.77	x 3.18	x 34.53	x 0.5	x 0.67	= 25.49 (74)
North	0.9x 0.77	x 3.18	x 55.46	x 0.5	x 0.67	= 40.95 (74)
North	0.9x 0.77	x 3.18	x 55.46	x 0.5	x 0.67	= 40.95 (74)
North	0.9x 0.77	x 3.18	x 55.46	x 0.5	x 0.67	= 40.95 (74)
North	0.9x 0.77	x 6.5	x 55.46	x 0.5	x 0.82	= 102.43 (74)
North	0.9x 0.77	x 3.18	x 55.46	x 0.5	x 0.67	= 40.95 (74)
North	0.9x 0.77	x 3.18	x 74.72	x 0.5	x 0.67	= 55.16 (74)
North	0.9x 0.77	x 3.18	x 74.72	x 0.5	x 0.67	= 55.16 (74)
North	0.9x 0.77	x 3.18	x 74.72	x 0.5	x 0.67	= 55.16 (74)
North	0.9x 0.77	x 6.5	x 74.72	x 0.5	x 0.82	= 137.99 (74)
North	0.9x 0.77	x 3.18	x 74.72	x 0.5	x 0.67	= 55.16 (74)
North	0.9x 0.77	x 3.18	x 79.99	x 0.5	x 0.67	= 59.05 (74)
North	0.9x 0.77	x 3.18	x 79.99	x 0.5	x 0.67	= 59.05 (74)
North	0.9x 0.77	x 3.18	x 79.99	x 0.5	x 0.67	= 59.05 (74)
North	0.9x 0.77	x 6.5	x 79.99	x 0.5	x 0.82	= 147.72 (74)
North	0.9x 0.77	x 3.18	x 79.99	x 0.5	x 0.67	= 59.05 (74)
North	0.9x 0.77	x 3.18	x 74.68	x 0.5	x 0.67	= 55.13 (74)
North	0.9x 0.77	x 3.18	x 74.68	x 0.5	x 0.67	= 55.13 (74)
North	0.9x 0.77	x 3.18	x 74.68	x 0.5	x 0.67	= 55.13 (74)
North	0.9x 0.77	x 6.5	x 74.68	x 0.5	x 0.82	= 137.92 (74)
North	0.9x 0.77	x 3.18	x 74.68	x 0.5	x 0.67	= 55.13 (74)
North	0.9x 0.77	x 3.18	x 59.25	x 0.5	x 0.67	= 43.74 (74)
North	0.9x 0.77	x 3.18	x 59.25	x 0.5	x 0.67	= 43.74 (74)
North	0.9x 0.77	x 3.18	x 59.25	x 0.5	x 0.67	= 43.74 (74)
North	0.9x 0.77	x 6.5	x 59.25	x 0.5	x 0.82	= 109.42 (74)

SAP WorkSheet: New dwelling design stage

North	0.9x	0.77	x	3.18	x	59.25	x	0.5	x	0.67	=	43.74	(74)
North	0.9x	0.77	x	3.18	x	41.52	x	0.5	x	0.67	=	30.65	(74)
North	0.9x	0.77	x	3.18	x	41.52	x	0.5	x	0.67	=	30.65	(74)
North	0.9x	0.77	x	3.18	x	41.52	x	0.5	x	0.67	=	30.65	(74)
North	0.9x	0.77	x	6.5	x	41.52	x	0.5	x	0.82	=	76.67	(74)
North	0.9x	0.77	x	3.18	x	41.52	x	0.5	x	0.67	=	30.65	(74)
North	0.9x	0.77	x	3.18	x	24.19	x	0.5	x	0.67	=	17.86	(74)
North	0.9x	0.77	x	3.18	x	24.19	x	0.5	x	0.67	=	17.86	(74)
North	0.9x	0.77	x	3.18	x	24.19	x	0.5	x	0.67	=	17.86	(74)
North	0.9x	0.77	x	6.5	x	24.19	x	0.5	x	0.82	=	44.67	(74)
North	0.9x	0.77	x	3.18	x	24.19	x	0.5	x	0.67	=	17.86	(74)
North	0.9x	0.77	x	3.18	x	13.12	x	0.5	x	0.67	=	9.68	(74)
North	0.9x	0.77	x	3.18	x	13.12	x	0.5	x	0.67	=	9.68	(74)
North	0.9x	0.77	x	3.18	x	13.12	x	0.5	x	0.67	=	9.68	(74)
North	0.9x	0.77	x	6.5	x	13.12	x	0.5	x	0.82	=	24.23	(74)
North	0.9x	0.77	x	3.18	x	13.12	x	0.5	x	0.67	=	9.68	(74)
North	0.9x	0.77	x	3.18	x	8.86	x	0.5	x	0.67	=	6.54	(74)
North	0.9x	0.77	x	3.18	x	8.86	x	0.5	x	0.67	=	6.54	(74)
North	0.9x	0.77	x	3.18	x	8.86	x	0.5	x	0.67	=	6.54	(74)
North	0.9x	0.77	x	6.5	x	8.86	x	0.5	x	0.82	=	16.37	(74)
North	0.9x	0.77	x	3.18	x	8.86	x	0.5	x	0.67	=	6.54	(74)
South	0.9x	0.54	x	1.14	x	46.75	x	0.5	x	0.7	=	9.07	(78)
South	0.9x	0.54	x	1.14	x	46.75	x	0.5	x	0.7	=	9.07	(78)
South	0.9x	0.54	x	1.14	x	46.75	x	0.5	x	0.7	=	9.07	(78)
South	0.9x	0.54	x	1.14	x	76.57	x	0.5	x	0.7	=	14.85	(78)
South	0.9x	0.54	x	1.14	x	76.57	x	0.5	x	0.7	=	14.85	(78)
South	0.9x	0.54	x	1.14	x	76.57	x	0.5	x	0.7	=	14.85	(78)
South	0.9x	0.54	x	1.14	x	97.53	x	0.5	x	0.7	=	18.91	(78)
South	0.9x	0.54	x	1.14	x	97.53	x	0.5	x	0.7	=	18.91	(78)
South	0.9x	0.54	x	1.14	x	97.53	x	0.5	x	0.7	=	18.91	(78)
South	0.9x	0.54	x	1.14	x	97.53	x	0.5	x	0.7	=	18.91	(78)
South	0.9x	0.54	x	1.14	x	110.23	x	0.5	x	0.7	=	21.38	(78)
South	0.9x	0.54	x	1.14	x	110.23	x	0.5	x	0.7	=	21.38	(78)
South	0.9x	0.54	x	1.14	x	110.23	x	0.5	x	0.7	=	21.38	(78)
South	0.9x	0.54	x	1.14	x	114.87	x	0.5	x	0.7	=	22.28	(78)
South	0.9x	0.54	x	1.14	x	114.87	x	0.5	x	0.7	=	22.28	(78)
South	0.9x	0.54	x	1.14	x	114.87	x	0.5	x	0.7	=	22.28	(78)
South	0.9x	0.54	x	1.14	x	110.55	x	0.5	x	0.7	=	21.44	(78)
South	0.9x	0.54	x	1.14	x	110.55	x	0.5	x	0.7	=	21.44	(78)
South	0.9x	0.54	x	1.14	x	110.55	x	0.5	x	0.7	=	21.44	(78)
South	0.9x	0.54	x	1.14	x	108.01	x	0.5	x	0.7	=	20.95	(78)
South	0.9x	0.54	x	1.14	x	108.01	x	0.5	x	0.7	=	20.95	(78)

SAP WorkSheet: New dwelling design stage

South	0.9x	0.54	x	1.14	x	108.01	x	0.5	x	0.7	=	20.95	(78)
South	0.9x	0.54	x	1.14	x	104.89	x	0.5	x	0.7	=	20.34	(78)
South	0.9x	0.54	x	1.14	x	104.89	x	0.5	x	0.7	=	20.34	(78)
South	0.9x	0.54	x	1.14	x	104.89	x	0.5	x	0.7	=	20.34	(78)
South	0.9x	0.54	x	1.14	x	101.89	x	0.5	x	0.7	=	19.76	(78)
South	0.9x	0.54	x	1.14	x	101.89	x	0.5	x	0.7	=	19.76	(78)
South	0.9x	0.54	x	1.14	x	101.89	x	0.5	x	0.7	=	19.76	(78)
South	0.9x	0.54	x	1.14	x	82.59	x	0.5	x	0.7	=	16.01	(78)
South	0.9x	0.54	x	1.14	x	82.59	x	0.5	x	0.7	=	16.01	(78)
South	0.9x	0.54	x	1.14	x	55.42	x	0.5	x	0.7	=	10.75	(78)
South	0.9x	0.54	x	1.14	x	55.42	x	0.5	x	0.7	=	10.75	(78)
South	0.9x	0.54	x	1.14	x	40.4	x	0.5	x	0.7	=	7.83	(78)
South	0.9x	0.54	x	1.14	x	40.4	x	0.5	x	0.7	=	7.83	(78)
South	0.9x	0.54	x	1.14	x	40.4	x	0.5	x	0.7	=	7.83	(78)

Solar gains in watts, calculated for each month

$$(83)m = \text{Sum}(74)m \dots (82)m$$

$$(83)m = 78.24 \quad 142.08 \quad 222.48 \quad 330.35 \quad 425.45 \quad 448.23 \quad 421.27 \quad 345.4 \quad 258.54 \quad 164.15 \quad 95.2 \quad 66.05 \quad (83)$$

Total gains – internal and solar $(84)m = (73)m + (83)m$, watts

$$(84)m = 635.38 \quad 695.03 \quad 754.4 \quad 829.55 \quad 891.12 \quad 883.77 \quad 839.1 \quad 771.29 \quad 703.17 \quad 641.69 \quad 609.41 \quad 608.04 \quad (84)$$

7. Mean internal temperature (heating season)

Temperature during heating periods in the living area from Table 9, Th1 ($^{\circ}\text{C}$)

21 (85)

Utilisation factor for gains for living area, $h1,m$ (see Table 9a)

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec		
(86)m= 0.93	0.91	0.87	0.78	0.65	0.49	0.37	0.42	0.62	0.82	0.9	0.94		(86)

Mean internal temperature in living area T1 (follow steps 3 to 7 in Table 9c)

$$(87)m = 19.33 \quad 19.54 \quad 19.9 \quad 20.36 \quad 20.71 \quad 20.91 \quad 20.97 \quad 20.96 \quad 20.81 \quad 20.37 \quad 19.79 \quad 19.29 \quad (87)$$

Temperature during heating periods in rest of dwelling from Table 9, Th2 ($^{\circ}\text{C}$)

$$(88)m = 20.11 \quad 20.11 \quad 20.11 \quad 20.13 \quad 20.13 \quad 20.14 \quad 20.14 \quad 20.14 \quad 20.14 \quad 20.13 \quad 20.12 \quad 20.12 \quad (88)$$

Utilisation factor for gains for rest of dwelling, $h2,m$ (see Table 9a)

$$(89)m= 0.92 \quad 0.9 \quad 0.85 \quad 0.75 \quad 0.61 \quad 0.44 \quad 0.31 \quad 0.35 \quad 0.57 \quad 0.79 \quad 0.89 \quad 0.93 \quad (89)$$

Mean internal temperature in the rest of dwelling T2 (follow steps 3 to 7 in Table 9c)

$$(90)m= 18.58 \quad 18.8 \quad 19.14 \quad 19.59 \quad 19.91 \quad 20.09 \quad 20.13 \quad 20.12 \quad 20.01 \quad 19.62 \quad 19.05 \quad 18.56 \quad (90)$$

$$fLA = \text{Living area} \div (4) =$$

0.51 (91)

Mean internal temperature (for the whole dwelling) = $fLA \times T1 + (1 - fLA) \times T2$

$$(92)m= 18.96 \quad 19.18 \quad 19.53 \quad 19.98 \quad 20.32 \quad 20.51 \quad 20.56 \quad 20.55 \quad 20.42 \quad 20 \quad 19.43 \quad 18.93 \quad (92)$$

Apply adjustment to the mean internal temperature from Table 4e, where appropriate

$$(93)m= 18.96 \quad 19.18 \quad 19.53 \quad 19.98 \quad 20.32 \quad 20.51 \quad 20.56 \quad 20.55 \quad 20.42 \quad 20 \quad 19.43 \quad 18.93 \quad (93)$$

8. Space heating requirement

Set T_i to the mean internal temperature obtained at step 11 of Table 9b, so that $T_{i,m}=(76)m$ and re-calculate the utilisation factor for gains using Table 9a

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

SAP WorkSheet: New dwelling design stage

Utilisation factor for gains, hm:

(94)m=	0.91	0.88	0.84	0.75	0.62	0.46	0.34	0.38	0.59	0.78	0.88	0.92	(94)
--------	------	------	------	------	------	------	------	------	------	------	------	------	------

Useful gains, hmGm , W = (94)m x (84)m

(95)m=	577.28	614.3	632.58	622.09	551.95	408.15	284.4	294.01	411.56	502.03	535.34	557.29	(95)
--------	--------	-------	--------	--------	--------	--------	-------	--------	--------	--------	--------	--------	------

Monthly average external temperature from Table 8

(96)m=	4.3	4.9	6.5	8.9	11.7	14.6	16.6	16.4	14.1	10.6	7.1	4.2	(96)
--------	-----	-----	-----	-----	------	------	------	------	------	------	-----	-----	------

Heat loss rate for mean internal temperature, Lm , W =[(39)m x [(93)m – (96)m]

(97)m=	1132.79	1099.34	999.98	836.46	648.27	436.71	292.7	305.84	470.64	707.24	933.64	1122.96	(97)
--------	---------	---------	--------	--------	--------	--------	-------	--------	--------	--------	--------	---------	------

Space heating requirement for each month, kWh/month = 0.024 x [(97)m – (95)m] x (41)m

(98)m=	413.3	325.94	273.34	154.35	71.67	0	0	0	0	152.68	286.78	420.86	
--------	-------	--------	--------	--------	-------	---	---	---	---	--------	--------	--------	--

$$\text{Total per year (kWh/year)} = \text{Sum}(98)_{1...5,9...12} = 2098.92 \quad (98)$$

Space heating requirement in kWh/m²/year

$$26.42 \quad (99)$$

9a. Energy requirements – Individual heating systems including micro-CHP)

Space heating:

Fraction of space heat from secondary/supplementary system

$$0 \quad (201)$$

Fraction of space heat from main system(s)

$$(202) = 1 - (201) = 1 \quad (202)$$

Fraction of total heating from main system 1

$$(204) = (202) \times [1 - (203)] = 1 \quad (204)$$

Efficiency of main space heating system 1

$$90.5 \quad (206)$$

Efficiency of secondary/supplementary heating system, %

$$0 \quad (208)$$

Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	kWh/year
-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	----------

Space heating requirement (calculated above)

413.3	325.94	273.34	154.35	71.67	0	0	0	0	152.68	286.78	420.86
-------	--------	--------	--------	-------	---	---	---	---	--------	--------	--------

$$(211)m = \{[(98)m \times (204)]\} \times 100 \div (206) \quad (211)$$

456.69	360.16	302.04	170.55	79.19	0	0	0	0	168.71	316.88	465.04
--------	--------	--------	--------	-------	---	---	---	---	--------	--------	--------

$$\text{Total (kWh/year)} = \text{Sum}(211)_{1...5,10...12} = 2319.25 \quad (211)$$

Space heating fuel (secondary), kWh/month

$$= \{[(98)m \times (201)]\} \times 100 \div (208)$$

(215)m=	0	0	0	0	0	0	0	0	0	0	0	0
---------	---	---	---	---	---	---	---	---	---	---	---	---

$$\text{Total (kWh/year)} = \text{Sum}(215)_{1...5,10...12} = 0 \quad (215)$$

Water heating

Output from water heater (calculated above)

183.8	161.68	169.06	150.52	146.76	130.07	123.91	137.37	137.57	156.14	166.39	179.03
-------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

Efficiency of water heater

(217)m=	89.26	89.17	88.97	88.53	87.84	86.6	86.6	86.6	86.6	88.49	89.03	89.3
---------	-------	-------	-------	-------	-------	------	------	------	------	-------	-------	------

$$86.6 \quad (216)$$

Fuel for water heating, kWh/month

$$(219)m = (64)m \times 100 \div (217)m$$

(219)m=	205.9	181.32	190.02	170.02	167.08	150.2	143.09	158.62	158.85	176.46	186.9	200.48
---------	-------	--------	--------	--------	--------	-------	--------	--------	--------	--------	-------	--------

$$\text{Total} = \text{Sum}(219a)_{1...12} = 2088.95 \quad (219)$$

Annual totals

Space heating fuel used, main system 1

$$\text{kWh/year} \quad 2319.25$$

Water heating fuel used

$$2088.95$$

Electricity for pumps, fans and electric keep-hot

SAP WorkSheet: New dwelling design stage

mechanical ventilation - balanced, extract or positive input from outside	189.01	(230a)
central heating pump:	30	(230c)
boiler with a fan-assisted flue	45	(230e)
Total electricity for the above, kWh/year	sum of (230a)...(230g) =	264.01 (231)
Electricity for lighting		343.68 (232)
Electricity generated by PVs		-423.17 (233)

10a. Fuel costs - individual heating systems:

	Fuel kWh/year	Fuel Price (Table 12)	Fuel Cost £/year
Space heating - main system 1	(211) x	3.48	x 0.01 = 80.71 (240)
Space heating - main system 2	(213) x	0	x 0.01 = 0 (241)
Space heating - secondary	(215) x	13.19	x 0.01 = 0 (242)
Water heating cost (other fuel)	(219)	3.48	x 0.01 = 72.7 (247)
Pumps, fans and electric keep-hot	(231)	13.19	x 0.01 = 34.82 (249)

(if off-peak tariff, list each of (230a) to (230g) separately as applicable and apply fuel price according to Table 12a

Energy for lighting	(232)	13.19	x 0.01 = 45.33 (250)
Additional standing charges (Table 12)			120 (251)
		one of (233) to (235) x	13.19 x 0.01 = 0 (252)
Appendix Q items: repeat lines (253) and (254) as needed			353.56 (255)

Total energy cost

$$(245) \dots (247) + (250) \dots (254) =$$

11a. SAP rating - individual heating systems

Energy cost deflator (Table 12)	0.42 (256)
Energy cost factor (ECF)	[(255) x (256)] ÷ [(4) + 45.0] = 1.19 (257)
SAP rating (Section 12)	83.35 (258)

12a. CO2 emissions – Individual heating systems including micro-CHP

	Energy kWh/year	Emission factor kg CO2/kWh	Emissions kg CO2/year
Space heating (main system 1)	(211) x	0.216	= 500.96 (261)
Space heating (secondary)	(215) x	0.519	= 0 (263)
Water heating	(219) x	0.216	= 451.21 (264)
Space and water heating	(261) + (262) + (263) + (264) =		952.17 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	0.519	= 137.02 (267)
Electricity for lighting	(232) x	0.519	= 178.37 (268)
Energy saving/generation technologies			
Item 1		0.519	= -219.63 (269)
Total CO2, kg/year	sum of (265) ... (271) =		1047.94 (272)

SAP WorkSheet: New dwelling design stage

CO2 emissions per m²	(272) ÷ (4) =	13.19	(273)
El rating (section 14)		89	(274)
13a. Primary Energy			
	Energy kWh/year	Primary factor	P. Energy kWh/year
Space heating (main system 1)	(211) x	1.22	= 2829.48 (261)
Space heating (secondary)	(215) x	3.07	= 0 (263)
Energy for water heating	(219) x	1.22	= 2548.52 (264)
Space and water heating	(261) + (262) + (263) + (264) =		5378.01 (265)
Electricity for pumps, fans and electric keep-hot	(231) x	3.07	= 810.52 (267)
Electricity for lighting	(232) x	0	= 1055.09 (268)
Energy saving/generation technologies			
Item 1		3.07	= -1299.14 (269)
'Total Primary Energy		sum of (265)...(271) =	5944.47 (272)
Primary energy kWh/m²/year	(272) ÷ (4) =	74.82	(273)

DRAFT