


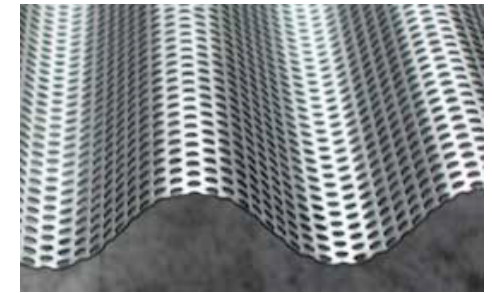


CHILLED BEAM COVER DETAIL
(Scale 1:5)

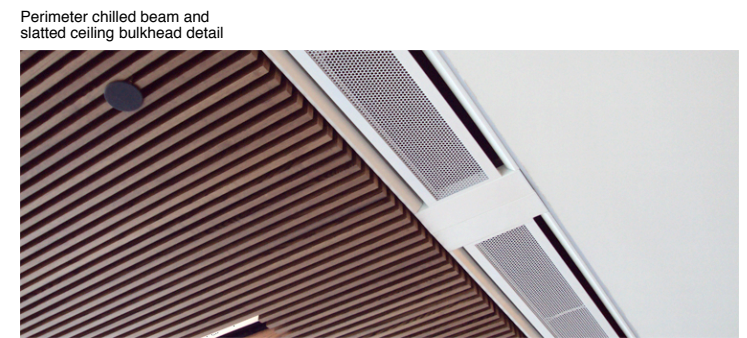

CORRUGATED STEEL PROFILE

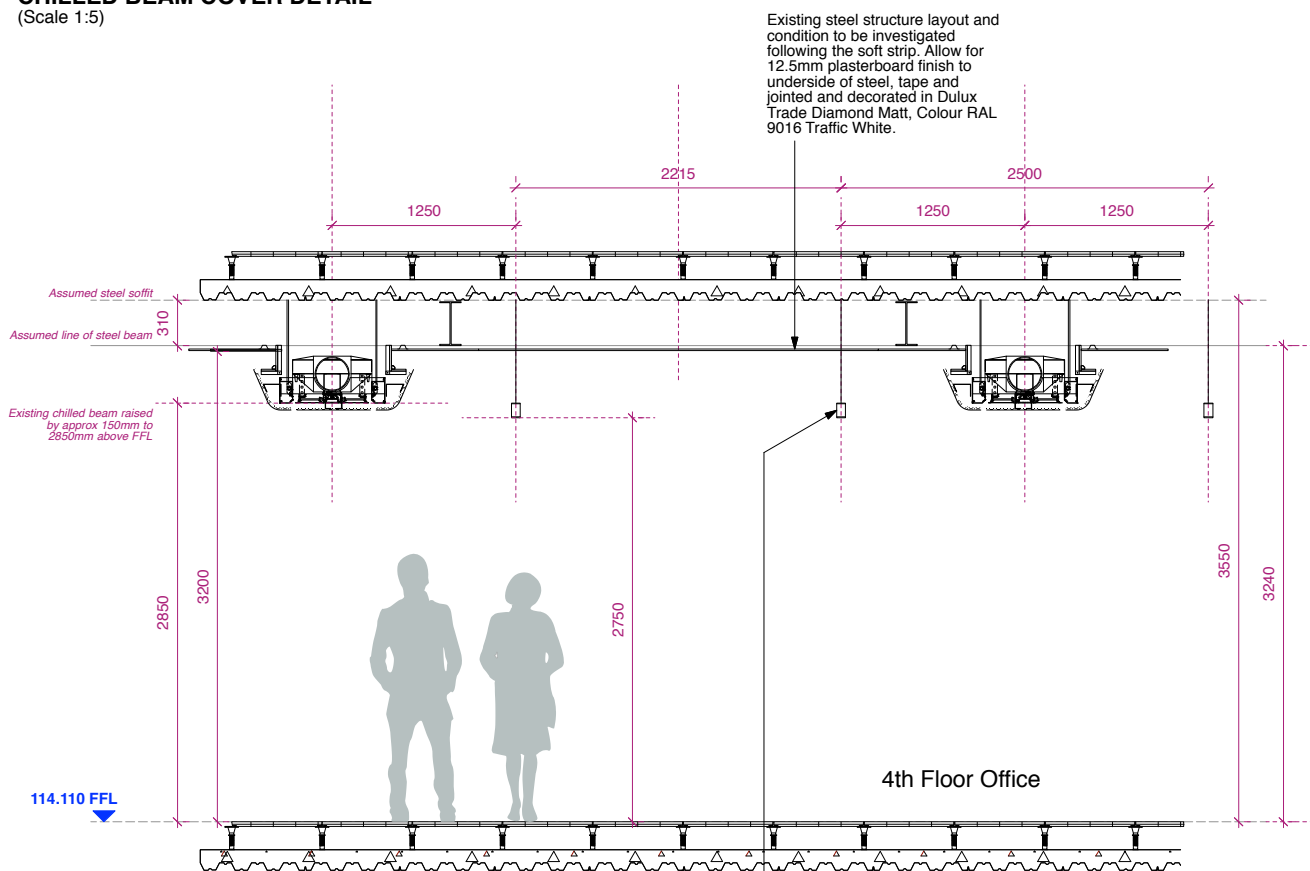

CHILLED BEAM AND SUSPENDED LIGHTING ARRANGEMENT

Existing steel structure layout and condition to be investigated following the soft strip. Allow for 12.5mm plasterboard finish to underside of steel, tape and jointed and decorated in Dulux Trade Diamond Matt, Colour RAL 9016 Traffic White.

RAISED FLOOR
Existing accessible raised floor panels and pedestals to be retained. Allow for new black neoprene foam strip.


Throughout: Remove any loose dirt by dry vacuum cleaning. Remove any adhering dirt with a single-disc cleaning machine or polishing vacuum cleaner (e.g. TASKI Omnisystem) and then work it in with a Red cleaner pad. If the pad starts to smudge, turn it or replace it by a new one. Having cleaned the surface, re-polishing, if required, is possible using a single-disc cleaning machine or polishing vacuum cleaner and polishing pad (White or Yellow).

SLATTED TIMBER CEILING
Ref: Supatile Supa Slat 4, Accessible ceiling, Black SF
Supplier: VTEC

Panels provides 57% open area, 15kg/m2 with in lay HP50 acoustic insulation
Ceiling fitted on to SUPATILE GRID (Black finish) with main runners installed at 600mm centres with 600mm cross-tees at 1200 or 600mm centres.

Timber slats to be cut to suit to fit recessed downlights in accordance with manufacturer recommendations

PERIMETER CHILLED BEAM AND BULKHEAD

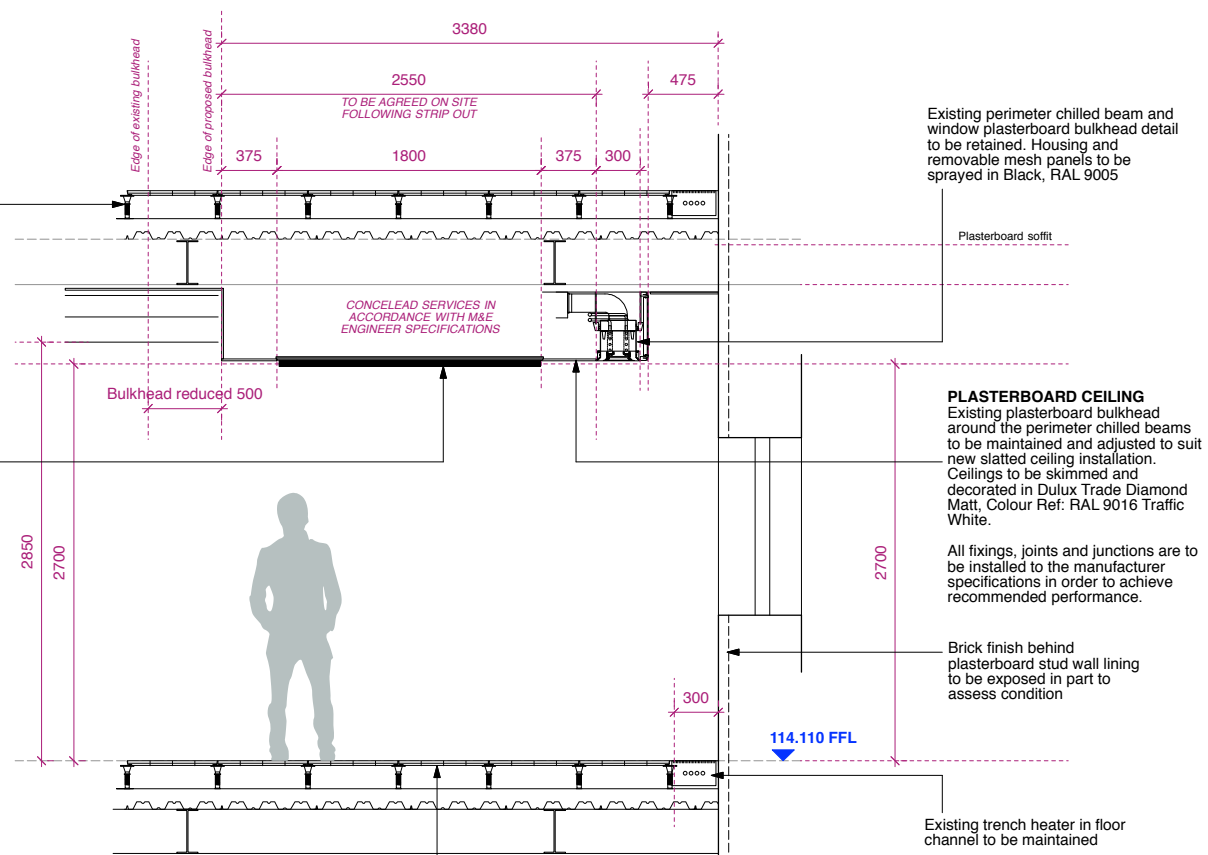

PLASTERBOARD CEILING
Existing plasterboard bulkhead around the perimeter chilled beams to be maintained and adjusted to suit new slatted ceiling installation. Ceilings to be skimmed and decorated in Dulux Trade Diamond Matt, Colour Ref: RAL 9016 Traffic White.

All fixings, joints and junctions are to be installed to the manufacturer specifications in order to achieve recommended performance.

Brick finish behind plasterboard stud wall lining to be exposed in part to assess condition

Existing raised floor to be retained. Throughout: Remove any loose dirt by dry vacuum cleaning. Remove any adhering dirt with a single-disc cleaning machine or polishing vacuum cleaner (e.g. TASKI Omnisystem) and then work it in with a Red cleaner pad. If the pad starts to smudge, turn it or replace it by a new one. Having cleaned the surface, re-polishing, if required, is possible using a single-disc cleaning machine or polishing vacuum cleaner and polishing pad (White or Yellow).

TYPICAL OFFICE CEILING DETAILS



PLANNING

PROJECT		SEVEN DIALS WAREHOUSE LONDON WC2		DRAWING TITLE		TYPICAL OFFICE CEILING DETAILS	
CLIENT		PEC NEALE LTD		SCALE		1:25	
DATE		OCT 16		DWG BY		LM	
CHKD.		DWG NO.		REV.			
		527-AS.26					
<small>This drawing is the copyright of gpad london ltd. Not to be reproduced, retained or disclosed to any unauthorised person either wholly or in part without written permission. Do not scale off this drawing. All indicated dimensions to be checked and verified on site by the contractor before commencement of any fabrication drawings or work whatsoever on site. Report any discrepancies to the Architect immediately. Drawings to be read in conjunction with relevant drawings and specification.</small>				<small>© gpad london ltd.</small>			
<small>T: 020 7549 2133 F: 020 7549 2144 E: info@gpadltd.com W: www.gpadltd.com</small>				<small>Unit 1 9a Dollington Street Clerkenwell London EC1V 0BQ</small>			