



KEY:

- **1** = existing solid wall construction (including retained 1980s impermeable sand/cement render)
- 2 = existing sash window (any existing architraves are non-original) with splayed timber reveals where indicated
- 3 = 12.5 mm plasterboard with Thistle finish coat on dabs on 3 mm thick Newton 503 vapour control/isolating membrane fixed to wall with Multiplug nailable plugs 28 mm total thickness
- 4 = Selectaglaze secondary glazing (overall 68 mm standoff from inner face of sash window box frame) approved under separate listed building consent
- **5** = painted timber cill board
- **6** = painted softwood joinery (frame packing etc for secondary glazing) including ogee architraves

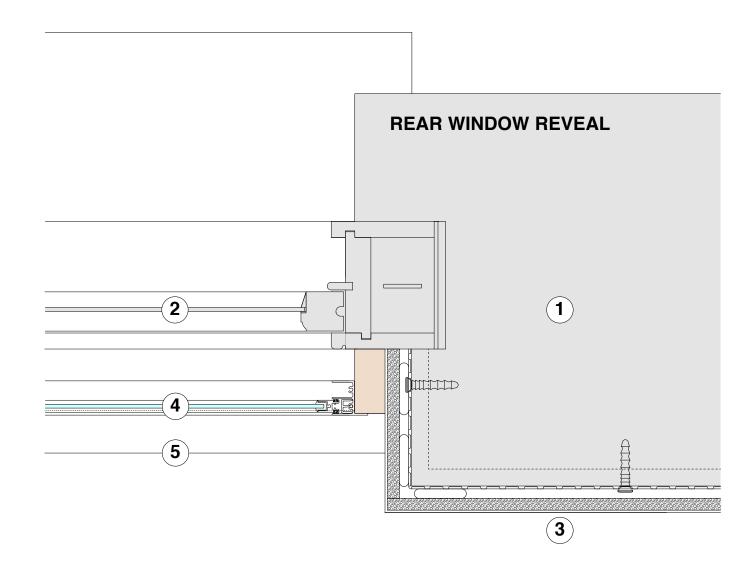



6214-FAC-D227A