



Detail 4 Typical Internal Underpinning Detail scale 1:25

Detail 3 Typical Underpinning Detail scale 1:25

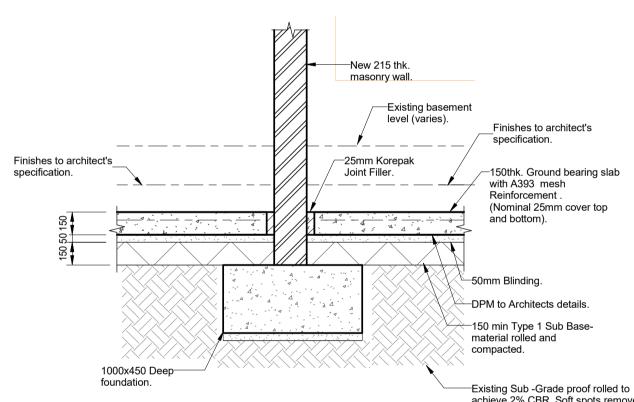

Detail 6 Typical New Foundation Detail scale 1:25

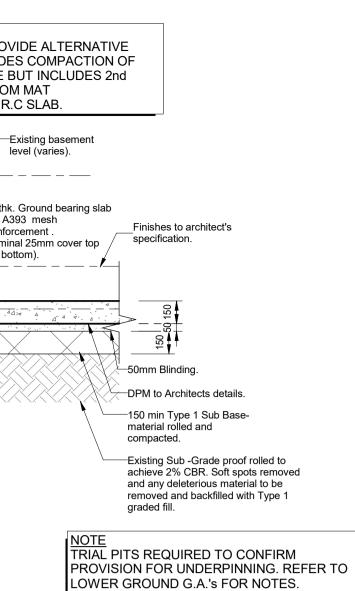

General Notes

- Drawings shall be referred to for structural work only unless otherwise stated and read in conjuction with Architect's, Service Engineer's and Sub-Contractor's drawings.
- 2. The Contractor shall check all levels and dimensions, any errors or omissions are to be reported at once to the Engineer.
- 3. Existing layouts and levels based upon Murphy's surveys information received to date (February 2016)
- 4. For Key and Member Schedules refer to drawing no. 9100-DRG-99YY-GN010.
- 5. For General Notes refer to drawing no. 9100-DRG-99YY-GN002.

NOTE FOR BUILDERSWORK HOLES ASSOCIATED WITH NEW SERVICES REFER TO M & E DRAWINGS.

NOTE ALL SERVICES SIZES AND POSITIONS ARE TO BE CONFIRMED BY THE ARCHITECT/M&E CONSULTANT PRIOR TO CONSTRUCTION.

NOTE FURTHER TRIAL PITS REQUIRED TO CONFIRM EXISTING FOOTINGS AND HENCE EXTENT OF UNDERPINNING REQUIRED. SEE LEVEL LG G.A.'s FOR FURTHER DETAILS.

NOTE S.S.L.'s (STRUCTURAL SLAB LEVEL) ARE INDICATIVE. T.B.C. BY ARCHITECT.

NOTE WATERPROOFING STRATEGY TO BE CONFIRMED BY OTHERS.

NOTE WATERPROOFING STRATEGY TO BE CONFIRMED BY OTHERS.

achieve 2% CBR. Soft spots removed and any deleterious material to be removed and backfilled with Type 1 graded fill.



CONSTRUCTION

