


DO NOT SCALE DIMENSIONS OFF THIS DRAWING  
CHECK ALL DIMENSIONS ON SITE BEFORE FABRICATION  
REPORT ALL ERRORS OR OMISSIONS TO SPRUNT LIMITED  
ANY DISCREPANCY TO BE VERIFIED WITH SPRUNT LIMITED BEFORE  
PROCEEDING WITH THE WORKS  
THIS DRAWING IS PROTECTED UNDER COPYRIGHT AND  
SHALL NOT BE REPRODUCED IN PART OR WHOLE WITHOUT PRIOR  
EXPRESSED PERMISSION OF SPRUNT LIMITED

ALL CURRENT DRAWINGS AND SPECIFICATIONS FOR THE PROJECT MUST BE READ IN CONJUNCTION WITH THE DESIGNER'S HAZARD AND ENVIRONMENT ASSESSMENT RECORD

1. INTERNAL BRICKWORK AS PER SPEC. F10/110A
2. CAVITY 52.5 mm
3. BREATHER MEMBRANE AS PER SPEC. P10/320
4. 140 mm SIP (SIP PANEL AS PER SPEC.)
5. STEEL LOADBEARING STRUCTURE AS PER STRUCTURAL ENGINEERS SPEC.
6. BRICK TIE WITH STAINLESS STEEL SCREW AS PER SPEC. F30/236
7. CAVITY CLOSER AS PER SPEC. F30/180
8. 50MM FULL FILL INSULATION TO SLAB EDGE AS PER SPEC. F30/150A
9. ENTRANCE DOOR AS PER SPEC. L20/280F
10. RC SLAB AS PER ENGINEERS DETAILS
11. 40 mm CAVITY
12. 12mm MGO BOARD (SIP PANEL AS PER SPEC.)
13. 15 mm PLASTERBOARD AS PER SPEC. K10/205
14. EDPM MEMBRANE AS PER WINDOW MANUFACTURER SPEC.
15. SELF ADHESIVE MEMBRANE AS PER SPEC. J40/190
16. CONCRETE CORE WALL AS PER ENGINEERS DETAILS
17. BRICK SLIP LINTEL AS PER SPEC. F30/755B AND S.E. SCHEDULE
18. 100mm FULL FILL INSULATION AS PER SPEC. F30/150
19. 75mm SCREED WITH UNDERFLOOR HEATING AS PER SPEC. M10/115A
20. VAPOUR CONTROL LAYER AS PER SPEC. P10/310
21. 150mm RIGID FLOOR INSULATION AS PER SPEC. P10/240A
22. CONCRETE SLAB AS PER S.E. SPEC.
23. 25mm RIGID INSULATION AS PER SPEC. P10/240A
24. 75x150mm CONTINUOUS STEEL ANGLE FIXED TO THE TOP OF UPSTAND AS PER SPEC. Z11
25. PRE APPLIED DPM MEMBRANE AS PER SPEC. J40/120A
26. 50mm SMOOTH CONCRETE BLINDING AS PER SPEC. J40/120A
27. PROTECTION BOARD-VISQUEEN HD PB AS PER SPEC.
28. STEEL FIXING BRACKET AS PER S.E. SPEC.
29. 102.5mm ENGINEERING BRICK AS PER SPEC. F10/110A
30. ACO DRAIN AS PER SPEC. R10
31. 65mm THICK EXTERNAL PAVER AS PER SPEC. Q10
32. CONCRETE LEAN MIX FOR DRAIN AS PER SPEC.
33. CAVITY CLOSER AS PER SPEC. F30/180
34. WEEP HOLE AS PER SPEC. F30
35. CAVITY TRAY AS PER SPEC. F30/345
36. TIMBER INFIL PANEL AS PER SPEC.
37. RESILIENT LAYER AS PER SPEC. M10/185A
38. FIRE BREAK AS PER SPEC. P10/420A
39. 20mm ENGINEERED TIMBER FLOORING AS PER SPEC. K20
40. 50mm LIQUID SCREED WITH UHF AS PER SPEC. M10/185A
41. 20mm THERMAL INSULATION AS PER SPEC. P10/240G
42. 300mm CONCRETE SLAB AS PER S.E.

sprint.

ver 3.6

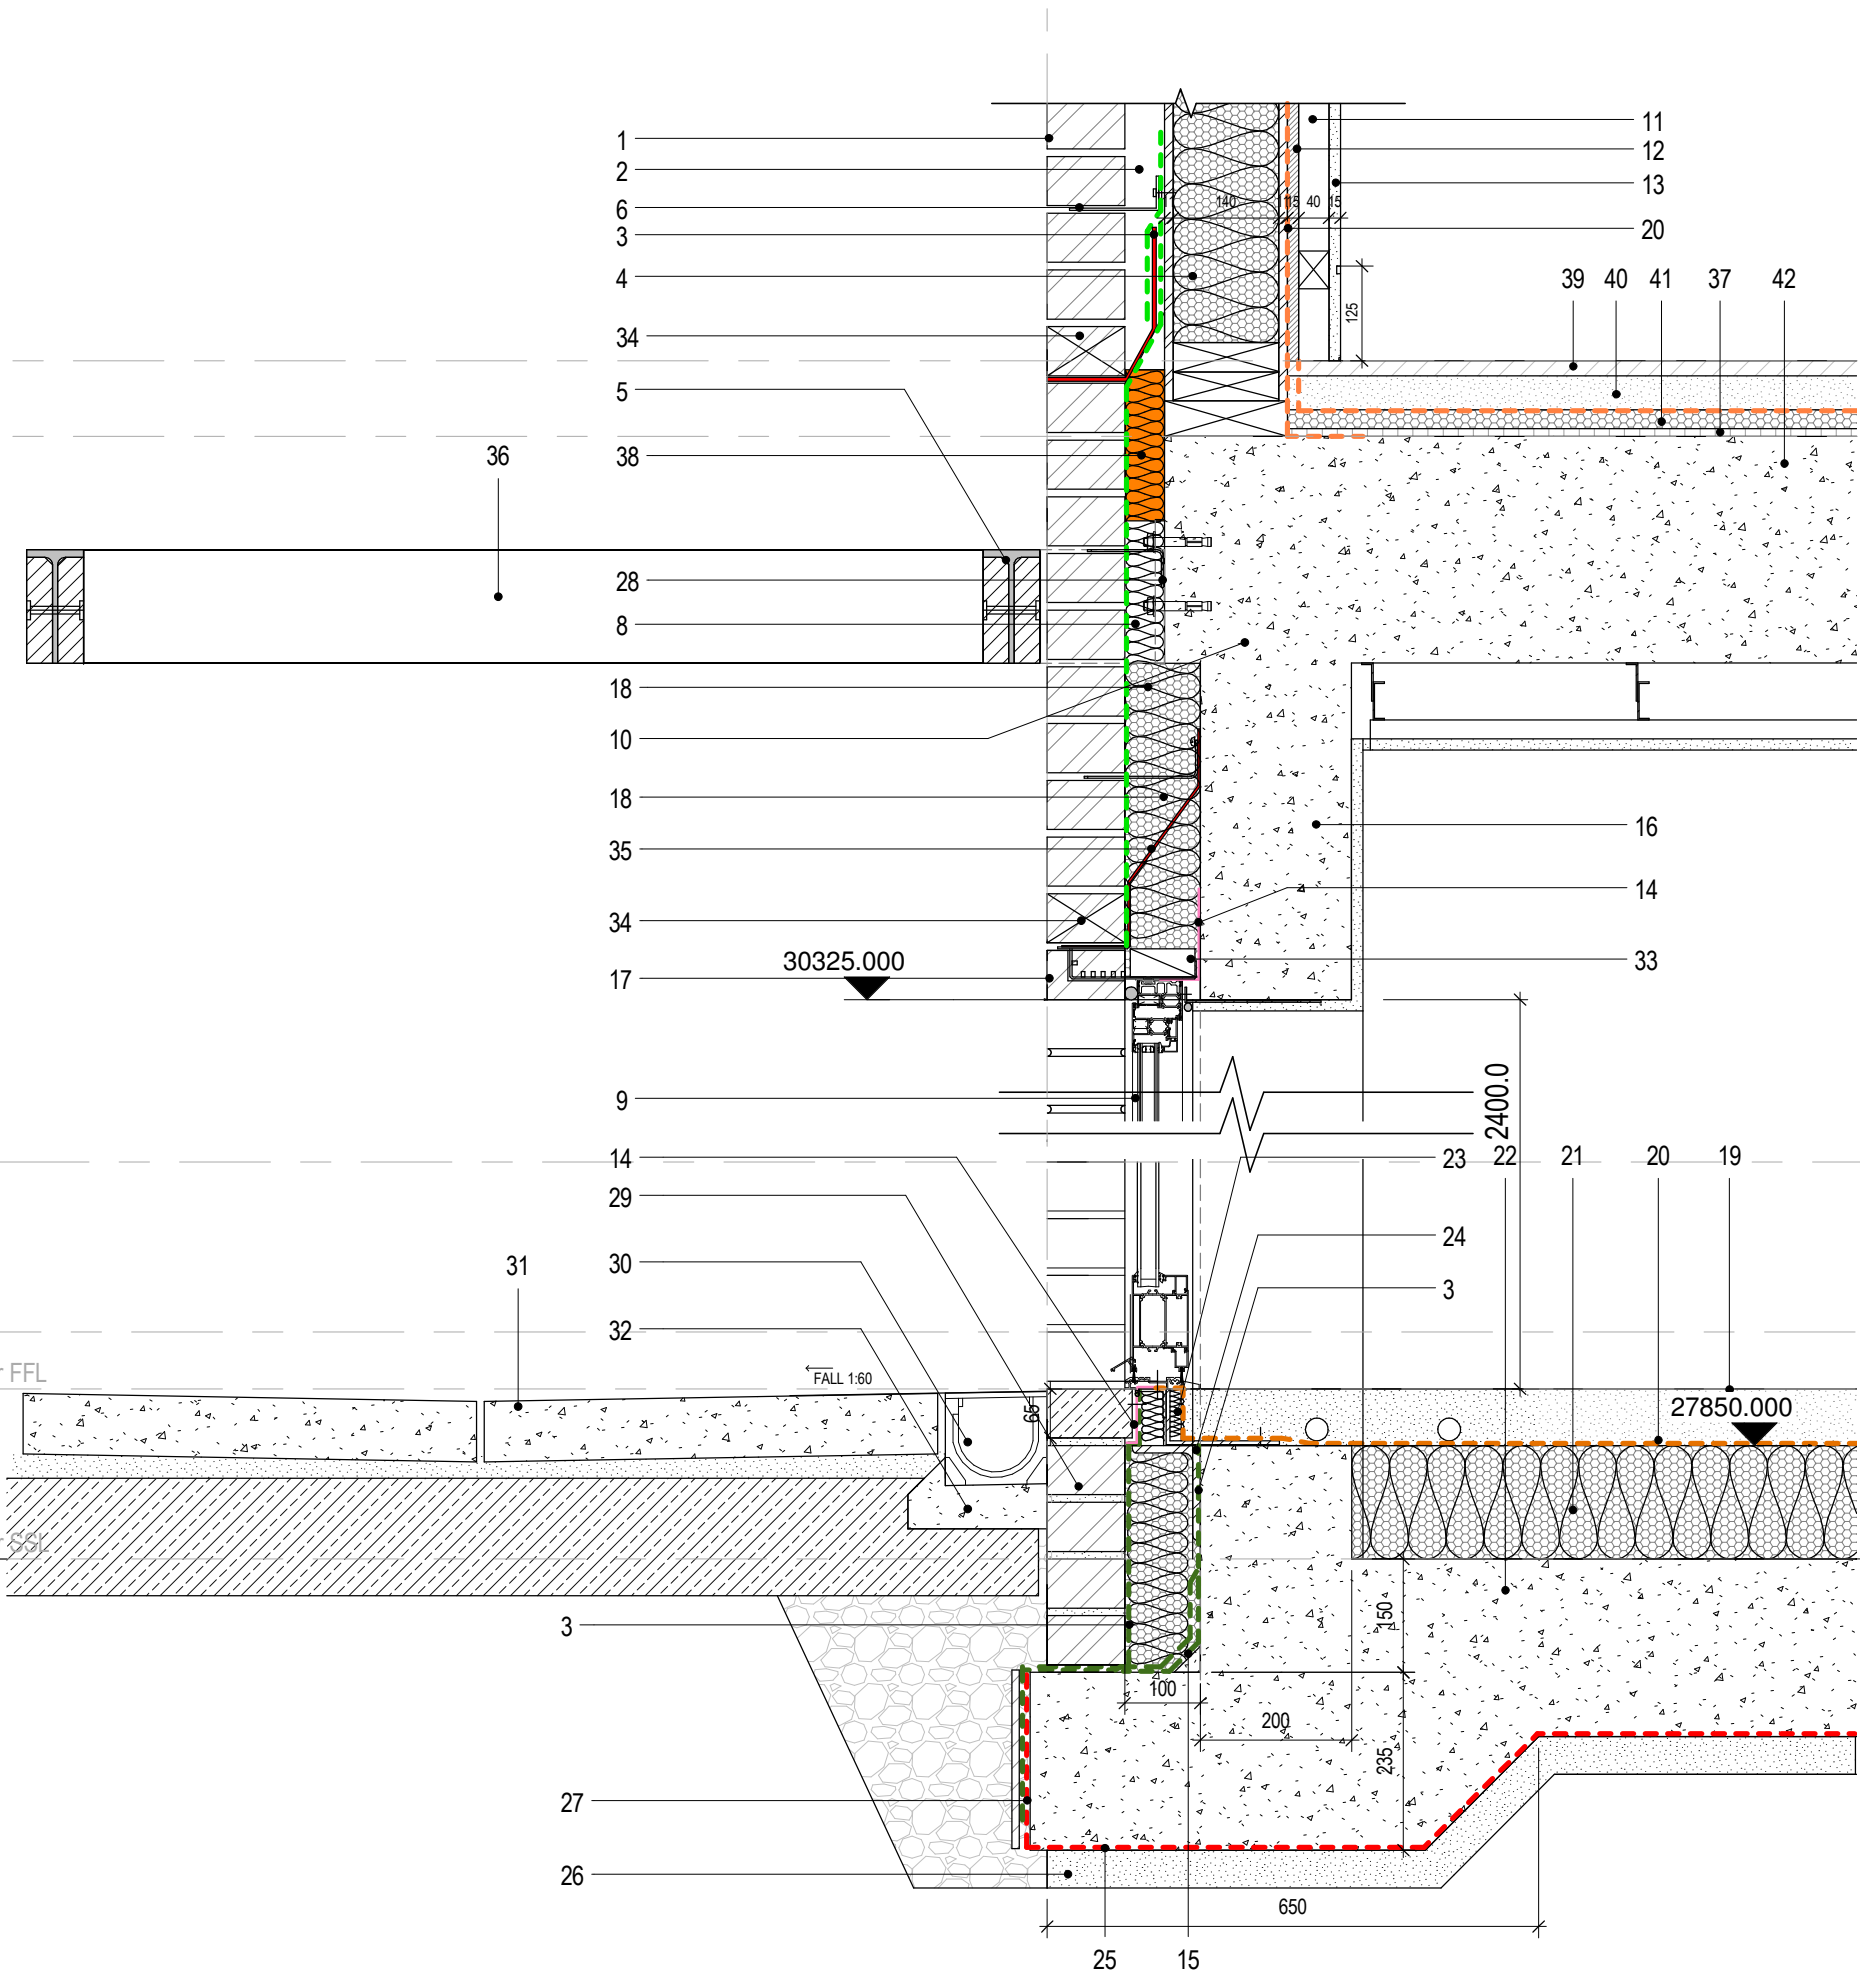

Printed on 07/12/2016 15:05:09 Revit file location D:\Users\LBenitez\Desktop\LB PROJECTS\12456 - Bayham Street\BIM\12456-SPR-M3-AR-BAYHAM\_311016 Lucia Local.rvt