

Specification/Data sheet


UltraVent® Plus 61/101 Combi-Duo



Article number: 60.72.203

Description

- In addition to the UltraVent® condensation technology there is also UltraVent® Plus, which is equipped with special filters. This prevents both vapours and the lingering smoke that builds up while grilling and roasting. RATIONAL units can be installed even in critical locations, such as front shop-front areas.

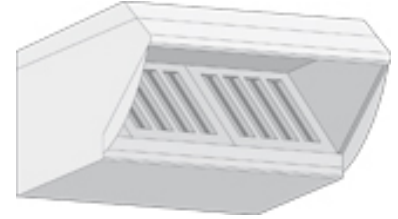

Technical Info

- Rating:230V 1 NAC 50/60 HZ
- Connected load:450 W
- Extraction volume: 1.000 m³/h:
- Operating noise level 1:55 dBA
- Operating noise level 2:60 dBA
- Width:854 mm
- height:628 mm
- Depth:1226 mm
- Weight:54 kg
- Approvals:VDE, NSF

Features

- Integrated lighting
- Easy-clean grease filter (CNS)
- High extraction rate
- Proximity door contact switch
- Extraction rate automatically increased when cabinet door is opened
- with special filter technology

Hint


- The local norms and specifications for air conditioning systems must be observed. A raised base cabinet US III (956 mm) should be used for installation on type 61 units.
- The UltraVent® Plus must not be mounted on the mobile Combi-Duo.

RATIONAL-UK

Unit 4, Titan Court, Portenwey Business Park.
Luton GB-Bedfordshire LU4 8EF; Phone
+44-15 82-48 03 88; Fax +44-15 82-48 50 01

Visit us on the internet: www.rational-online.com

We reserve the right to make technical improvements

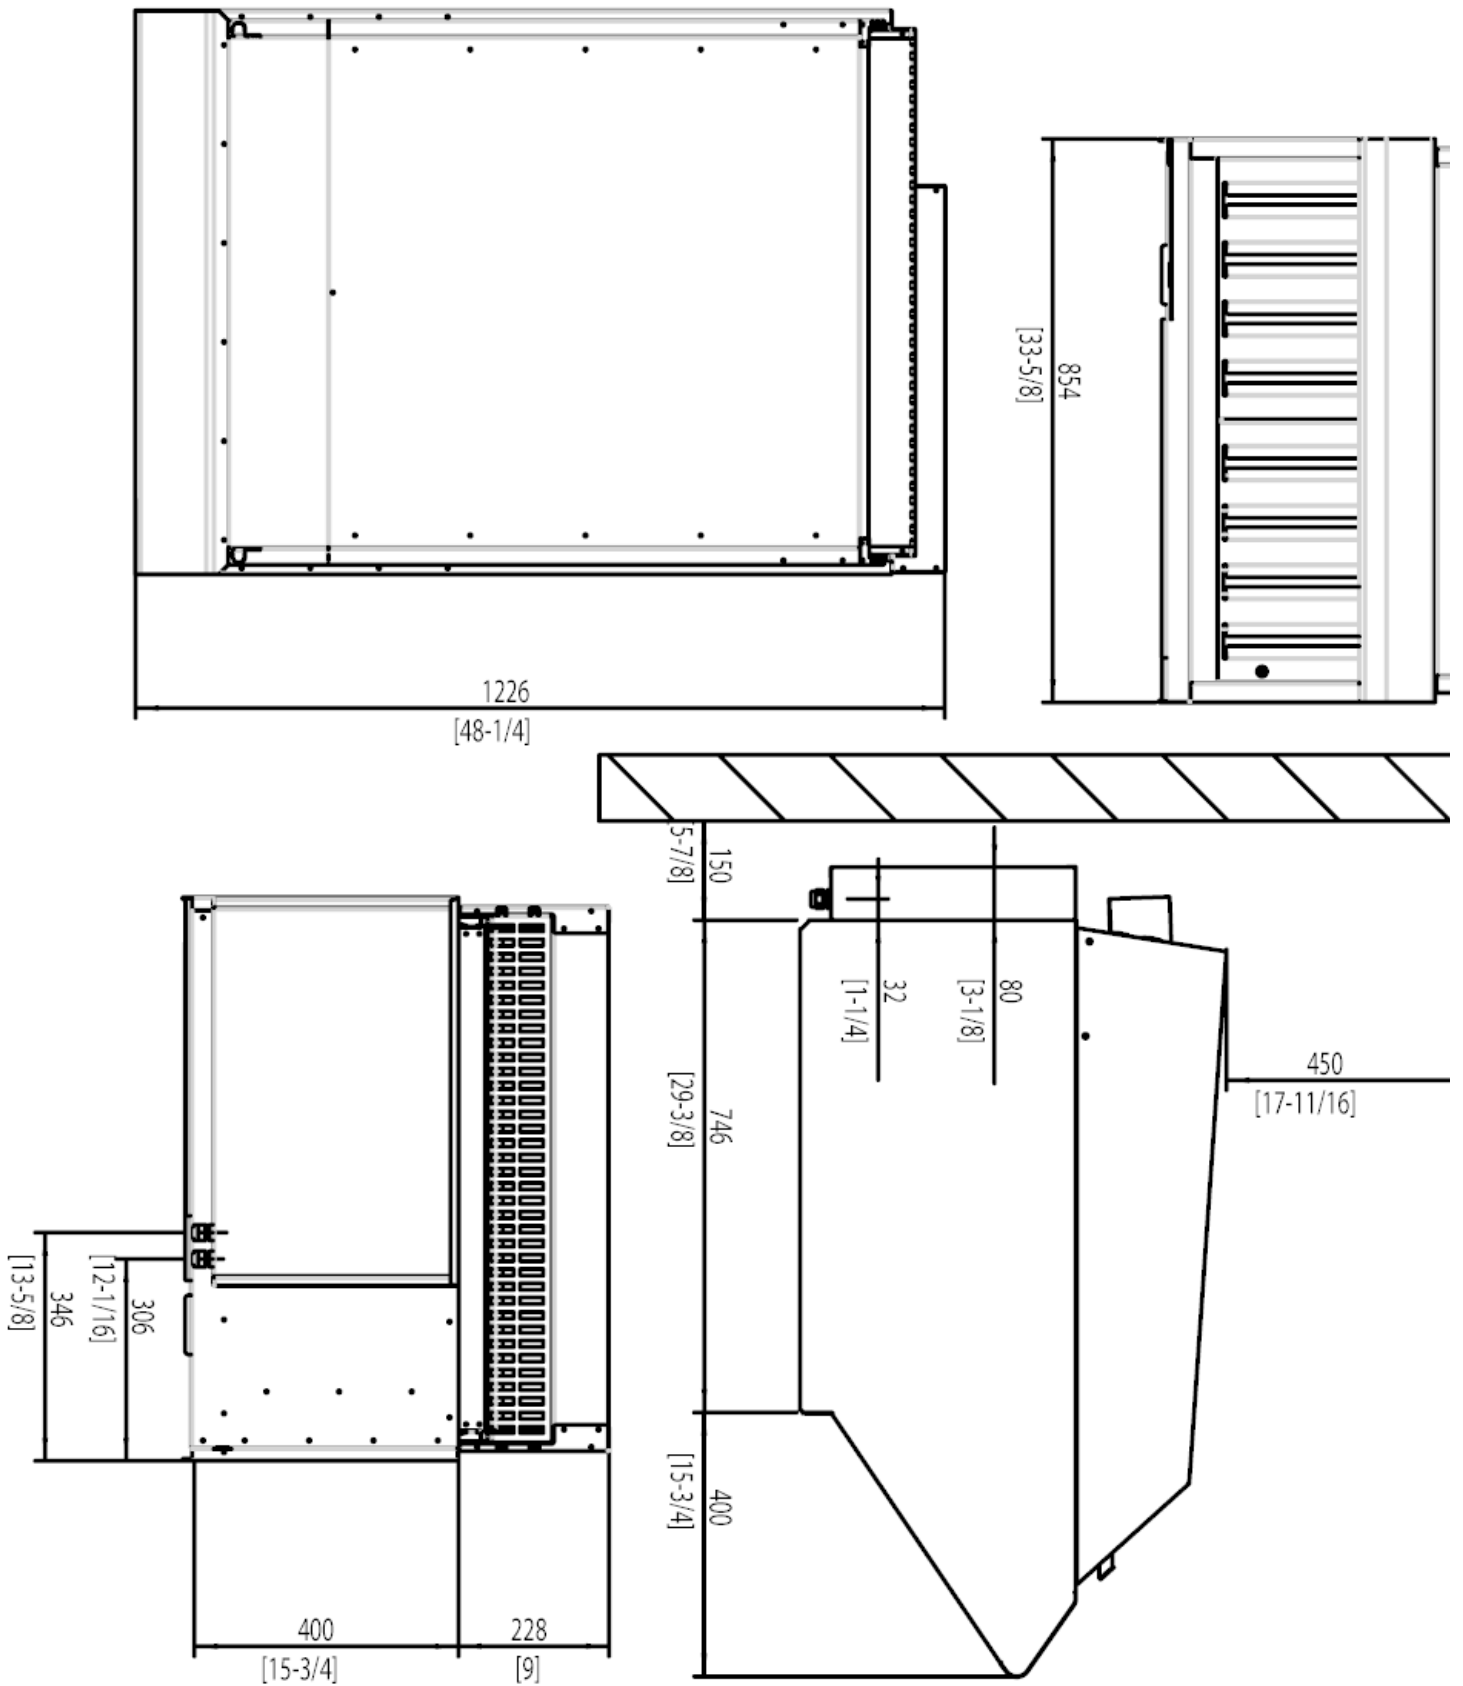

RATIONAL-UK

Unit 4, Titan Court, Portenwey Business Park.
Luton GB-Bedfordshire LU4 8EF; Phone
+44-15 82-48 03 88; Fax +44-15 82-48 50 01

Visit us on the internet: www.rational-online.com

We reserve the right to make technical improvements