



NBS Reference: DT01 (L20/481)

NBS Description:	External Glazed Escape Door	Fire Rating:	FD 30 S
Door Type:	DT01	Security:	Internal Panic Bar
Opening Direction:	Outward	Notes:	Min. 1800mm Clear Opening required.
Ironmongery:	Refer to Schedule		

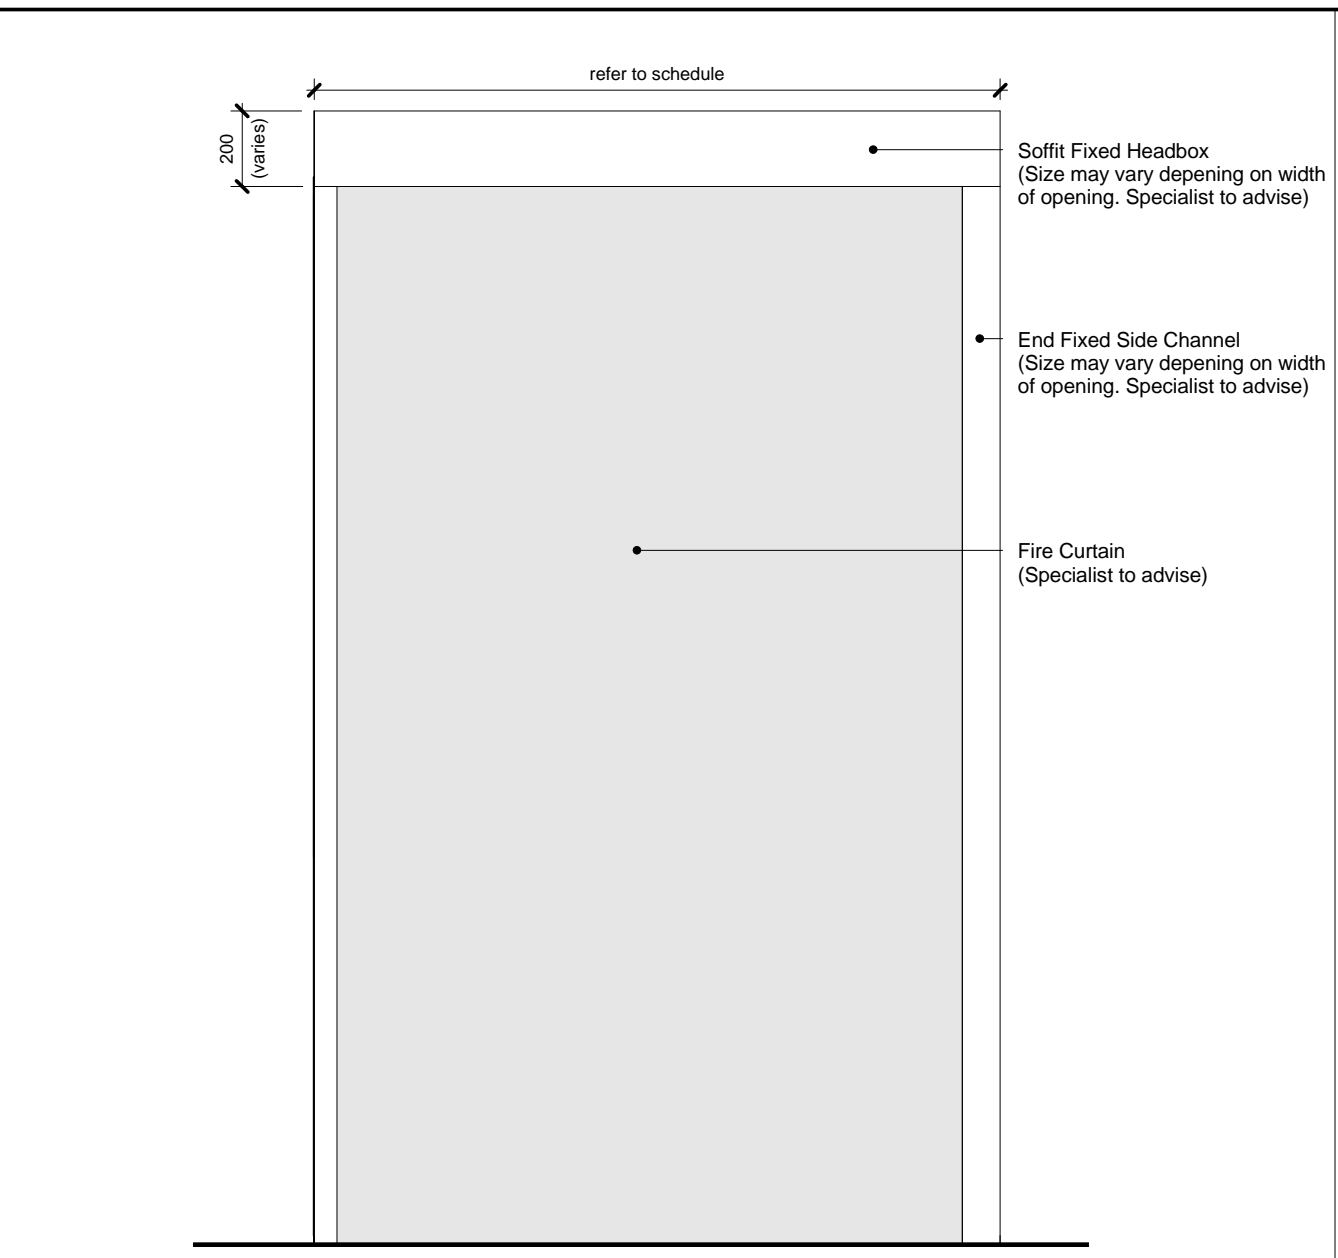


NBS Reference: DT02 (L20/610A & 610B)

NBS Description:	Fire Curtain	Fire Rating:	FD 30 S
Door Type:	DT02	Security:	Fire Access/Control
Opening Direction:	Upward	Notes:	To specialist recommendation
Ironmongery:	Refer to schedule		

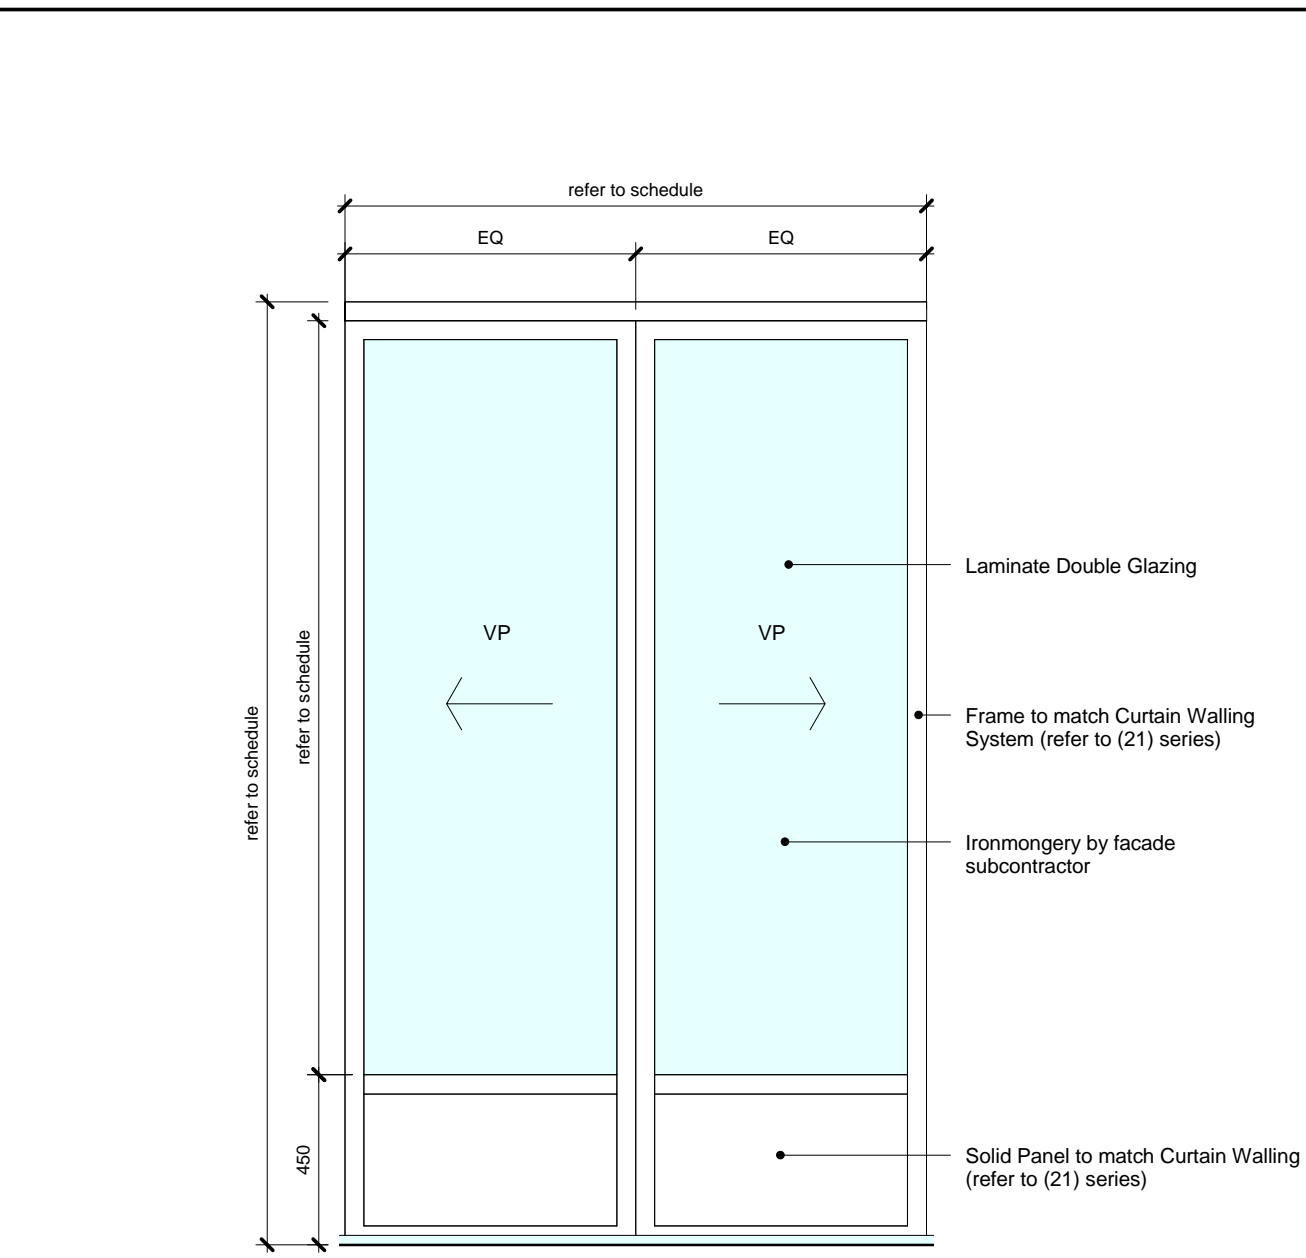

NBS Reference: DT03 (L20/520 & 520A)

NBS Description:	Glazed Sliding Doors	Fire Rating:	N/A
Door Type:	DT03	Security:	Tenant requirements
Opening Direction:	Sliding/Folding	Notes:	Manual or Automatic (refer to Door Schedule)
Ironmongery:	Refer to schedule		

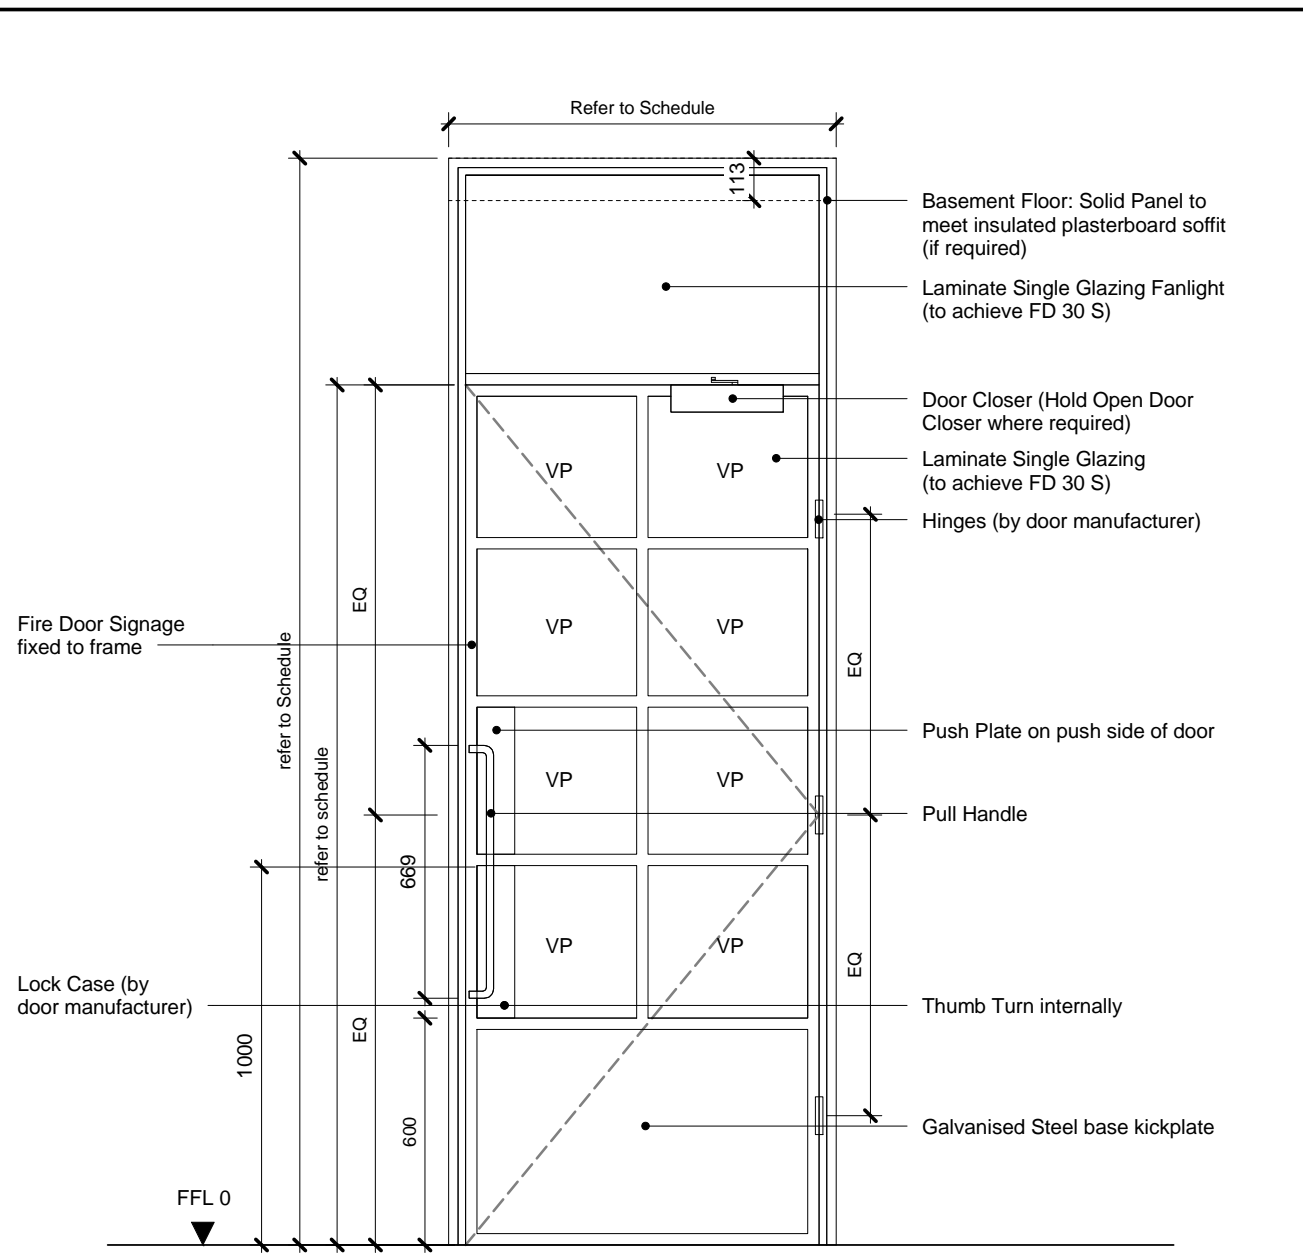

NBS Reference: DT04 (L20/482)

NBS Description:	Glazed Door (Single)	Fire Rating:	Refer to schedule
Door Type:	DT04	Security:	To landlords requirements (refer to schedule)
Opening Direction:	Refer to schedule	Notes:	Hold Open Requirements (refer to schedule)
Ironmongery:	Refer to schedule		

KEY

Refer to Door Schedule for dimensions and requirements.

Market Shutters to be tenant fit out (excluding those tagged within the (32) series).


Riser doors/access panels TBC
All service penetrations from risers to be fire stopped

VP Vision Panel
Sign as required by schedule
Door Closer
Hinge
Opening

NOTE


For individual door information: Refer to AX_(32)_0011-30 Door Schedule Ironmongery: Set out as per door elevation

For door details refer to 14045_AX_(32)_9010, 9011, 9012, 9013

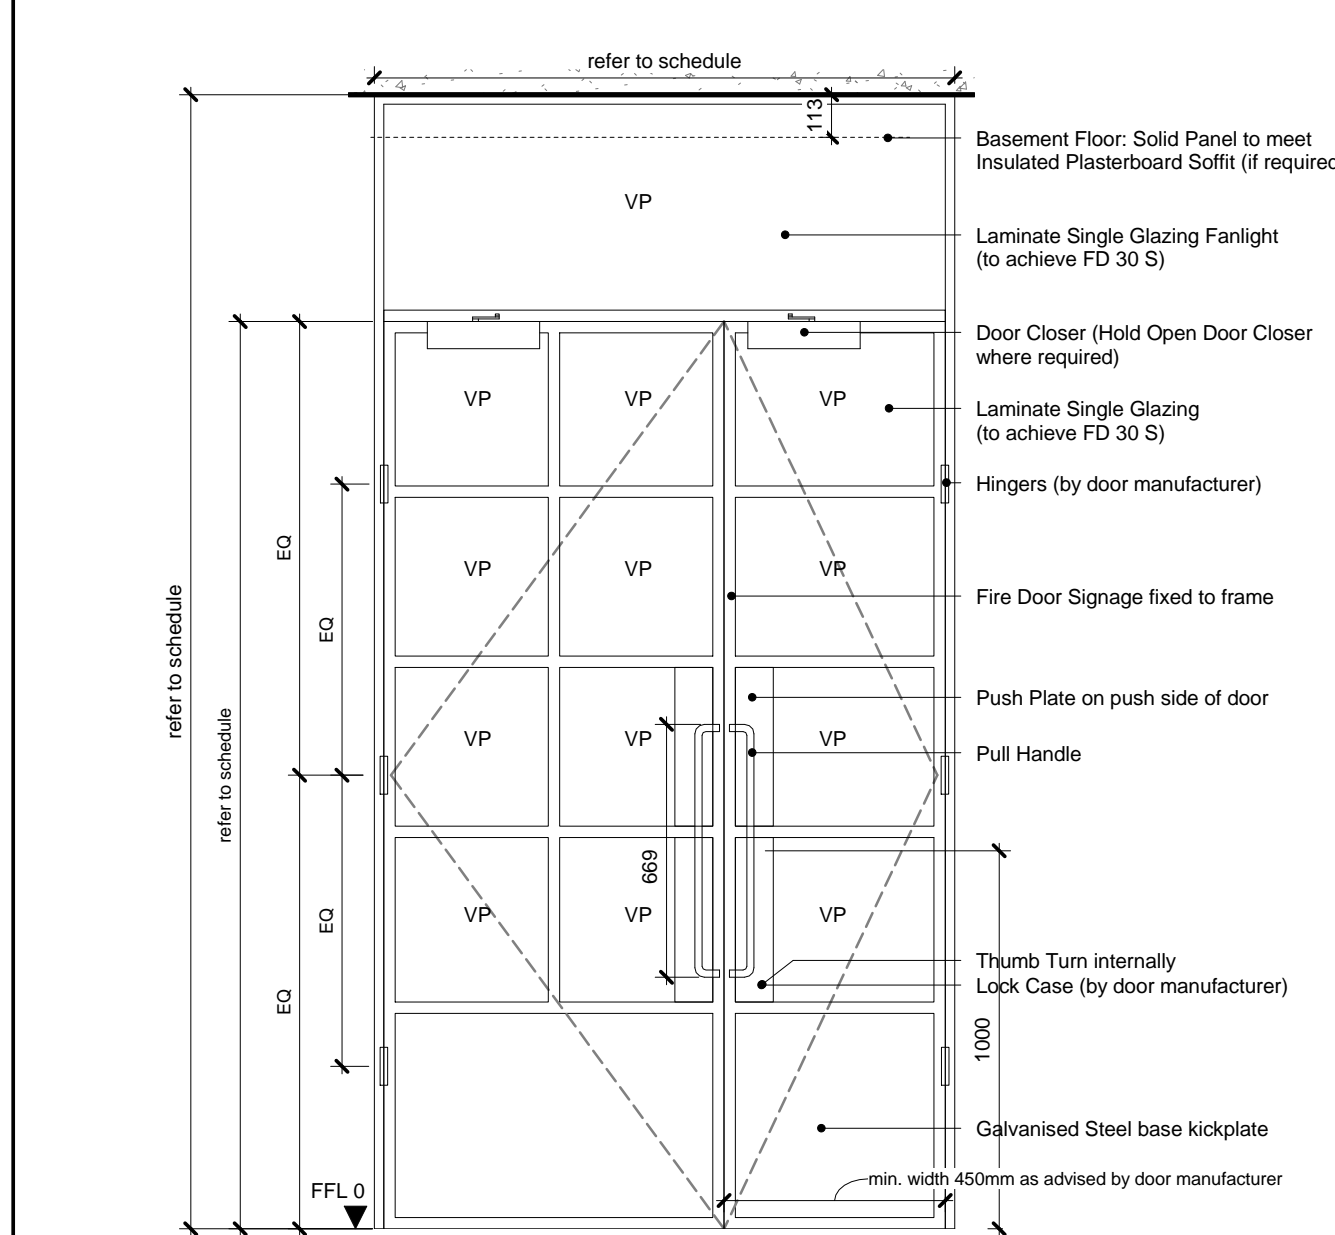


NBS Reference: DT04 (L20/482)

NBS Description:	Glazed Door (Leaf and a Half)	Fire Rating:	Refer to schedule
Door Type:	DT04	Security:	To landlords requirements (refer to schedule)
Opening Direction:	Refer to schedule	Notes:	Hold Open Requirements (refer to schedule)
Ironmongery:	Refer to schedule		

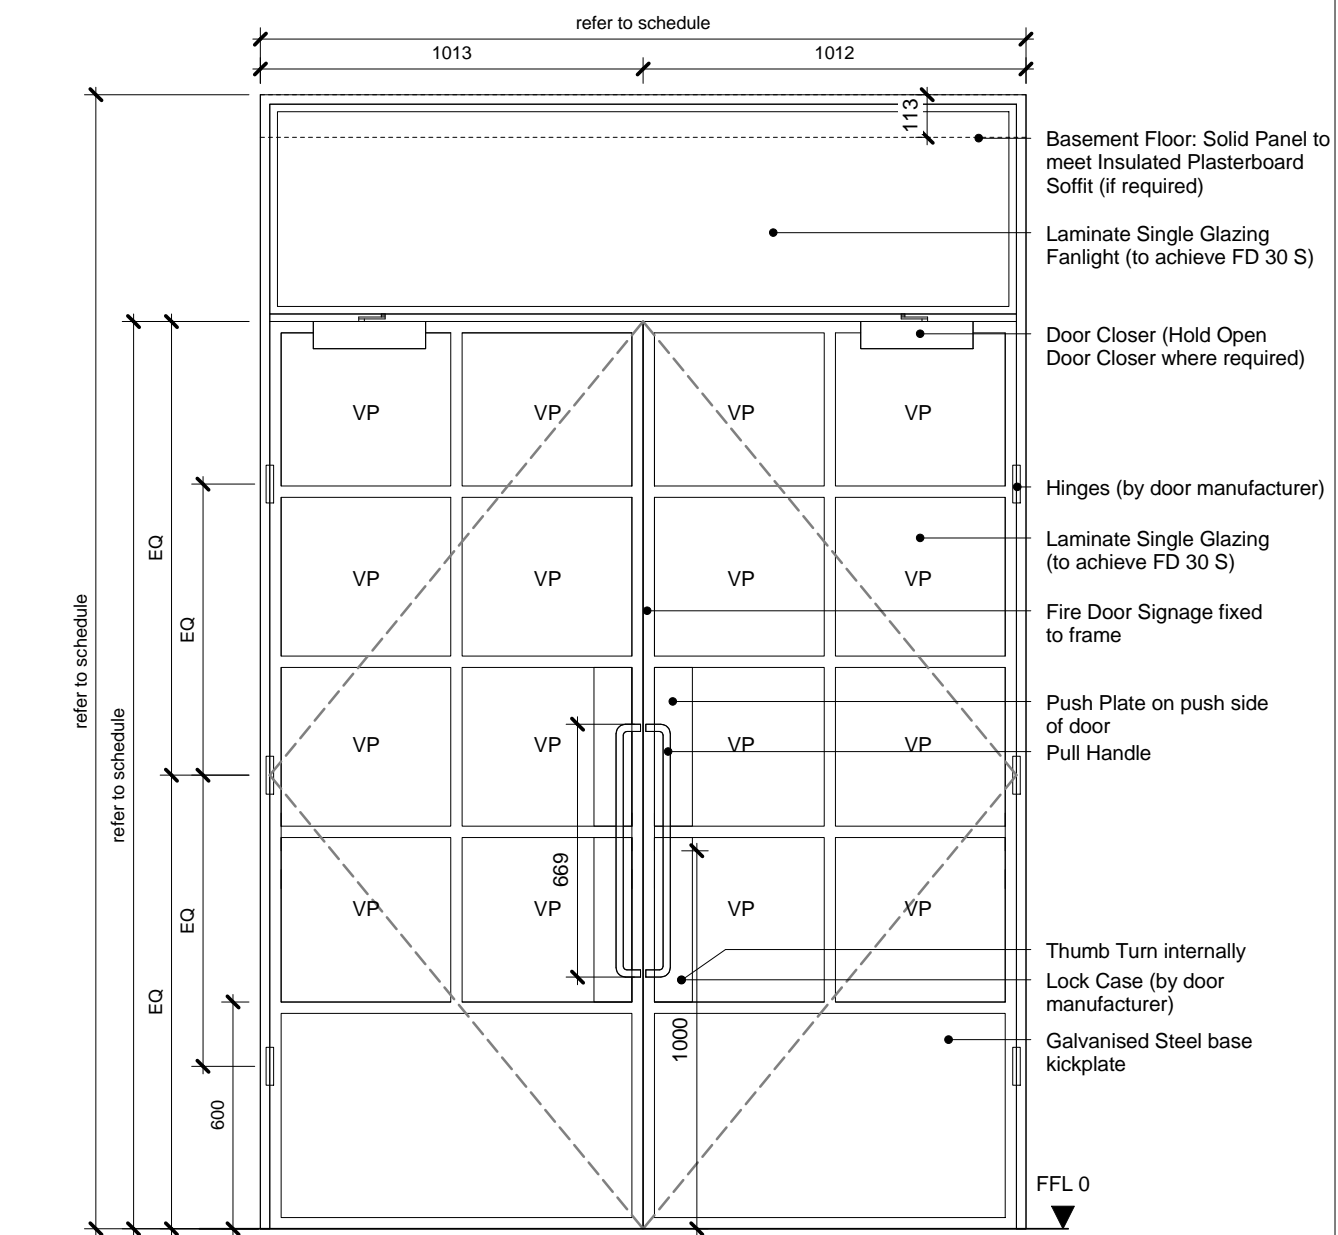


NBS Reference: DT04 (L20/482)

NBS Description:	Glazed Door (Double)	Fire Rating:	Refer to schedule
Door Type:	DT04	Security:	To landlords requirements (refer to schedule)
Opening Direction:	Refer to schedule	Notes:	Hold Open Requirements (refer to schedule)
Ironmongery:	Refer to schedule		

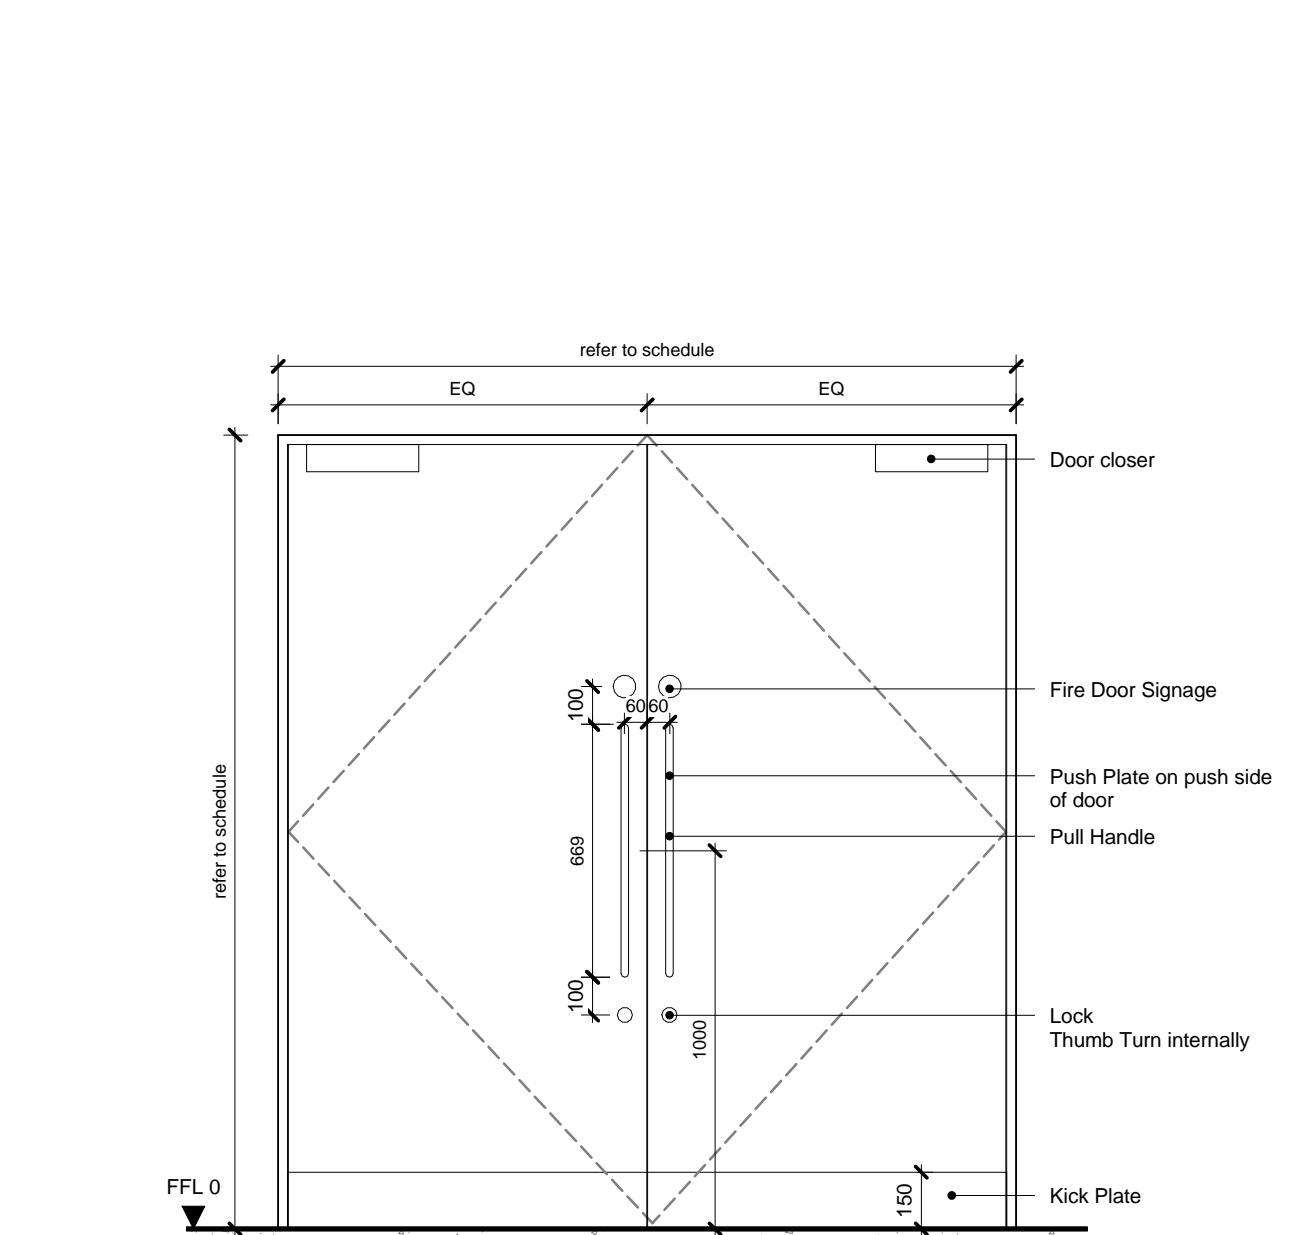

NBS Reference: DT06 (L20/411)

NBS Description:	Internal Plant Room Door	Fire Rating:	FD 60 S
Door Type:	DT06	Security:	Secure Access for Maintenance Only
Opening Direction:	Inward	Notes:	
Ironmongery:	Refer to schedule		

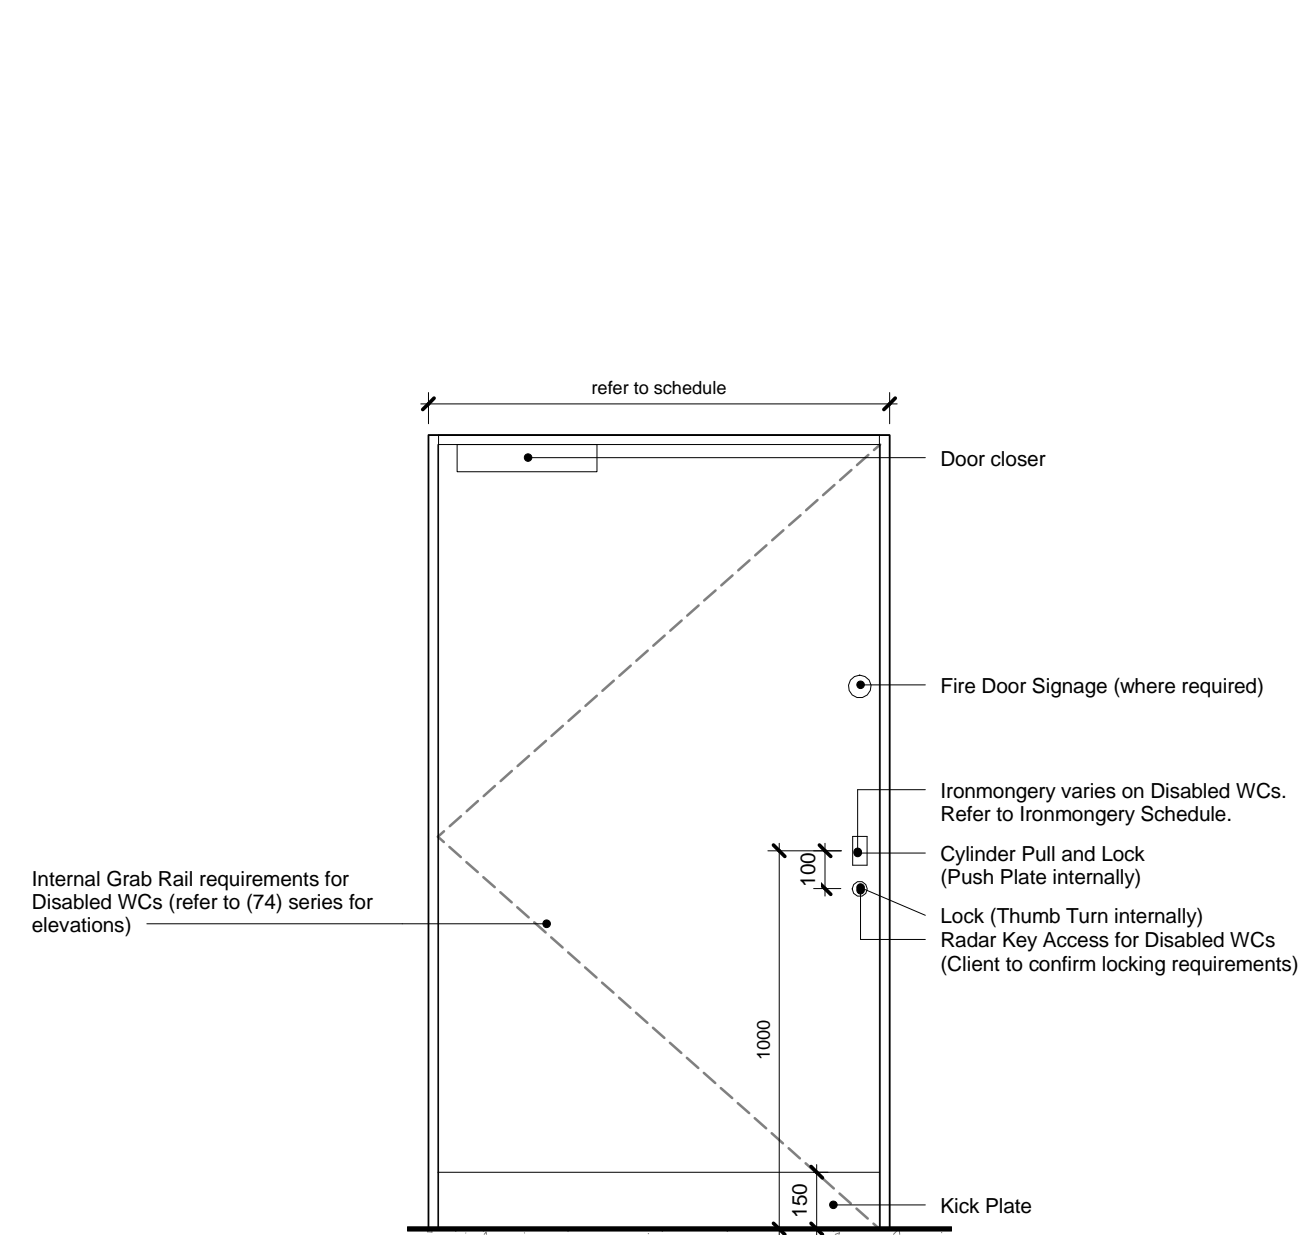

NBS Reference: DT07 (L20/412)

NBS Description:	Internal Door	Fire Rating:	FD 30 S
Door Type:	DT07	Security:	Disabled WC. Radar Key (TBC by Client) Refer to Schedule
Opening Direction:	Refer to Schedule	Notes:	
Ironmongery:	Refer to Schedule		


CONSULTANTS

CLIENT:	Stanley Sidings
CONTRACTOR:	Mace Group
STRUCTURAL ENGINEER:	Walsh Group
MECHANICAL ENGINEER:	AECOM
COST MANAGER:	Gardiner & Theobald
PROJECT MANAGER:	Gardiner & Theobald
ACOUSTIC CONSULTANT:	Arup
TRANSPORT CONSULTANT:	Arup
PLANNING CONSULTANT:	Gerald Eve
LANDSCAPE ARCHITECT:	Fabrik
CDM CO-ORDINATOR:	Gardiner & Theobald

NOTE


- Do not scale from this drawing.
- All dimensions to be checked on site by the contractor and such dimensions to be his responsibility. Report all drawing errors, omissions and discrepancies to the architect.
- This document may be issued in an uncontrolled CAD format to enable others to use it as background information to make alterations and/or additions. In that instance the file will be accompanied by a PDF version. It is for those making such alterations and additions to ensure that they make use of current background information.
- AHMM Ltd accepts no liability for any such alterations or additions to the background information or arising out of changes to background information which occur prior to alterations or additions being made.

REFER TO TECHNICAL REFERENCE SHEET FOR SPECIFICATION CLAUSES DOCUMENT REFERENCE: 14045 A TRS

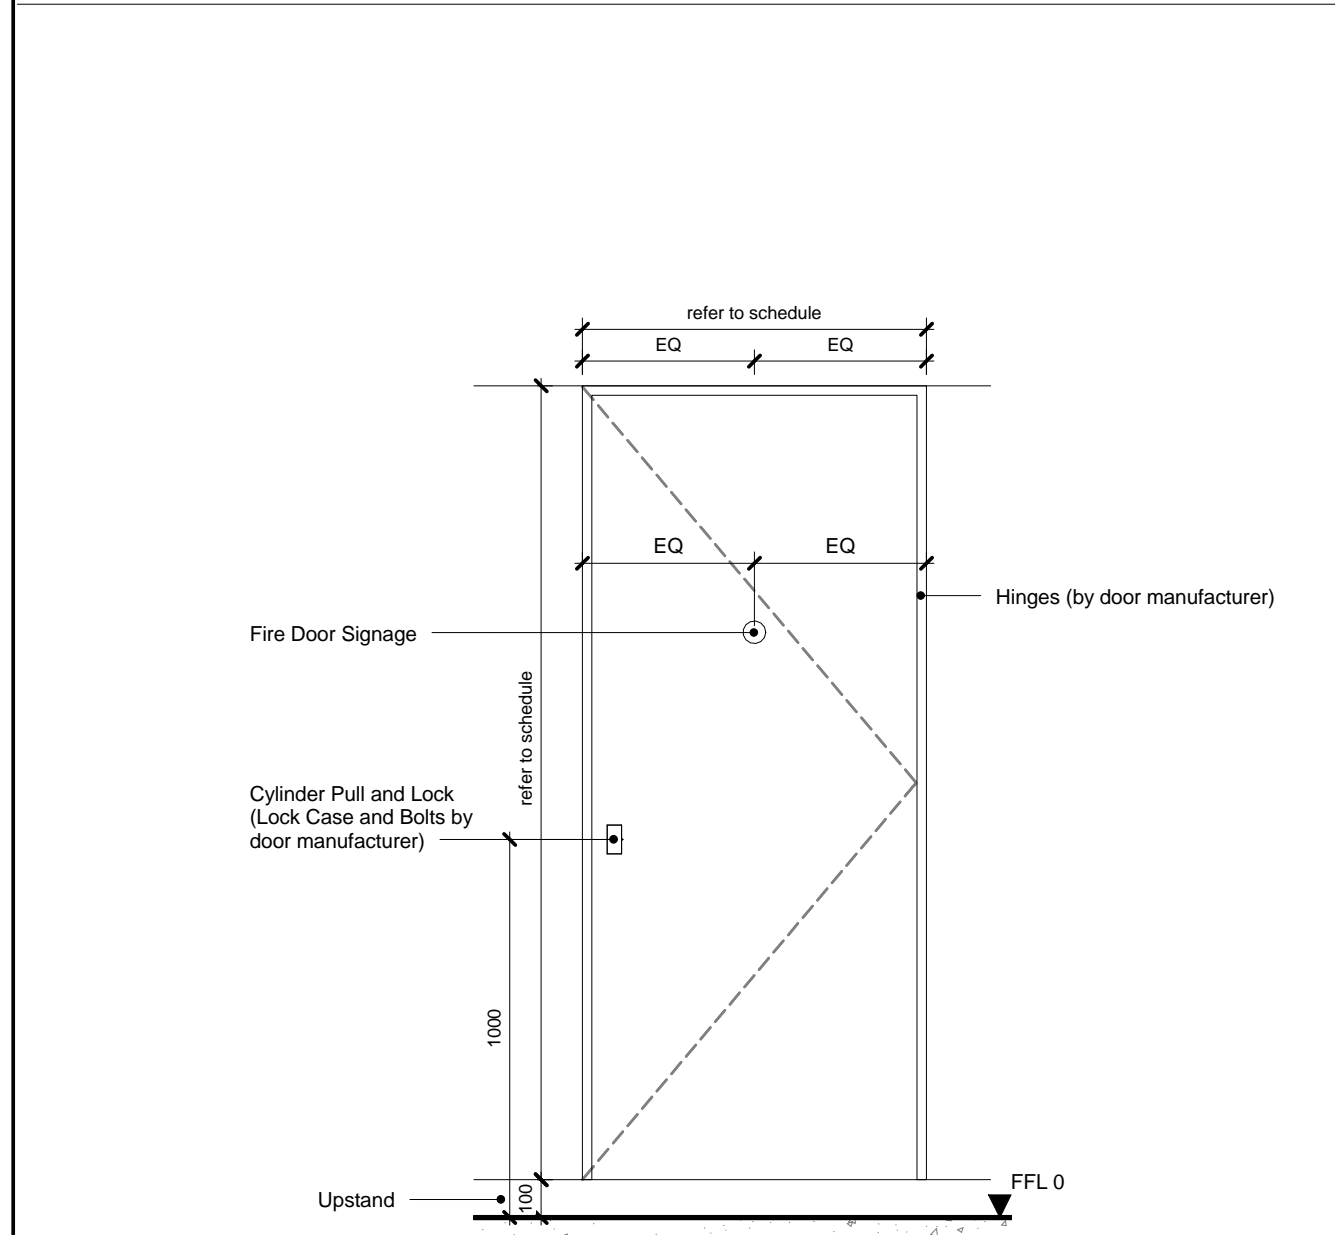


NBS Reference: DT08 (L20/414)

NBS Description:	Riser Door	Fire Rating:	FD30
Door Type:	DT08	Security:	Secure Access for Maintenance Only
Opening Direction:	Refer to schedule	Notes:	For Thermal and Acoustic Requirements (refer to schedule)
Ironmongery:	Refer to Schedule		

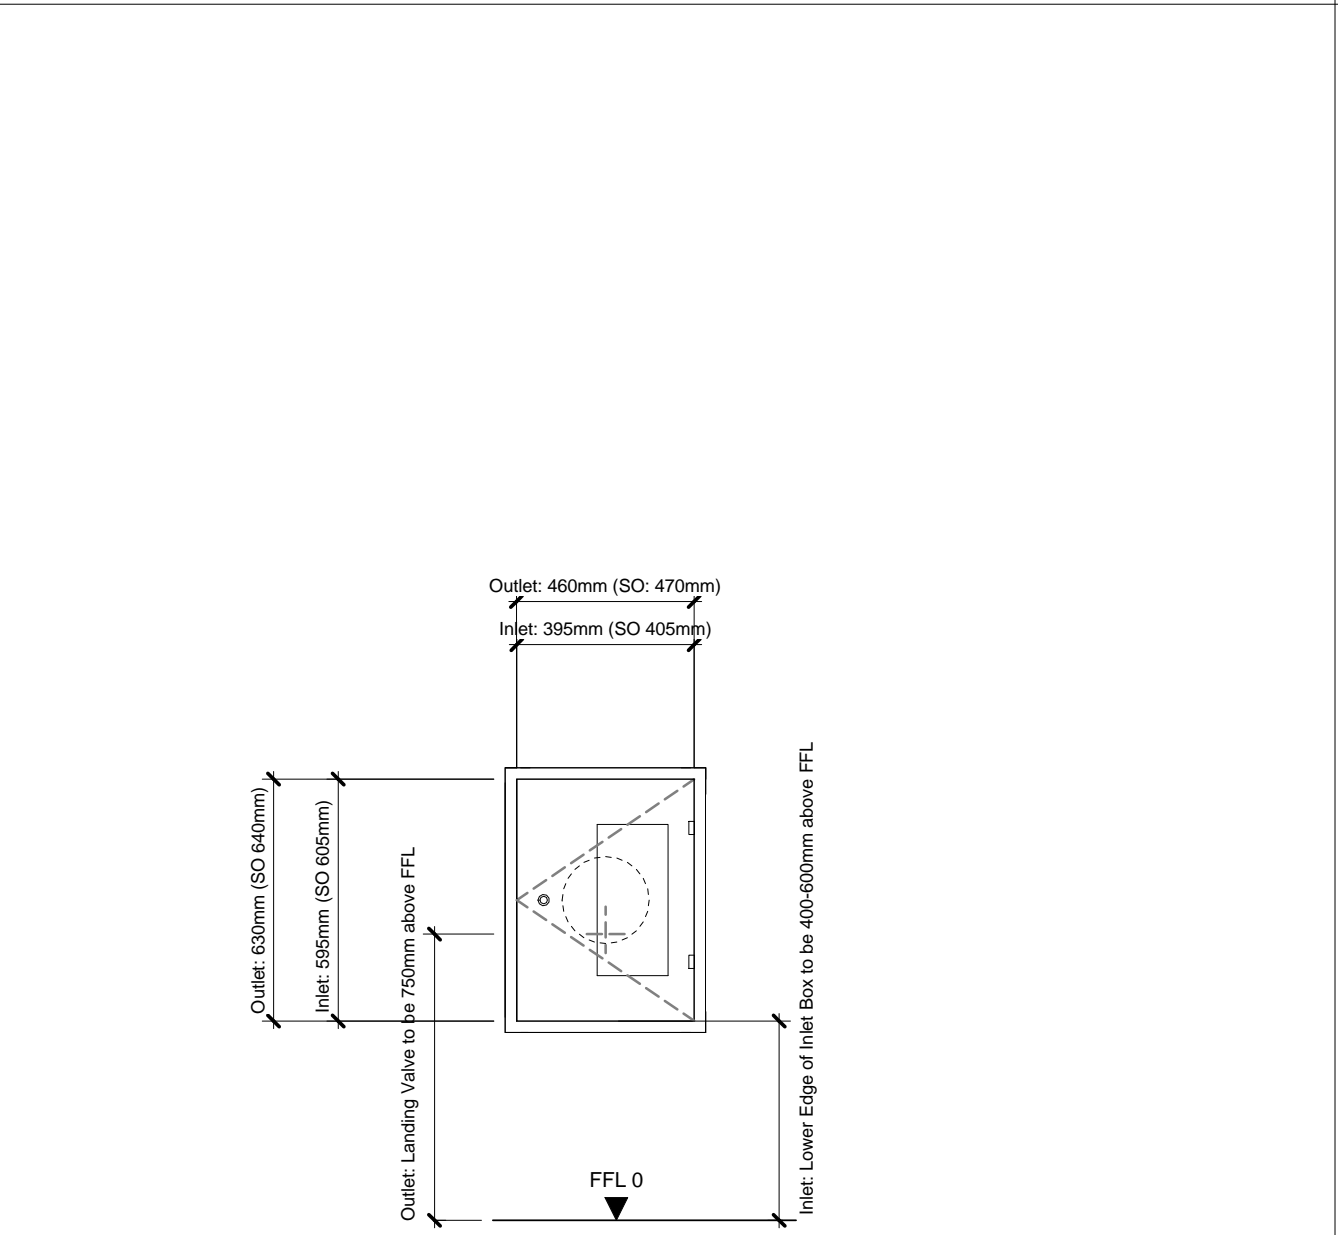


NBS Reference: DT09 (L20/483)

NBS Description:	Dry Riser Access Panel	Fire Rating:	FD 30
Door Type:	DT09	Security:	Dry Riser Access (Inlet and Outlet)
Opening Direction:	Outward	Notes:	To be coordinated with Concrete Walls Refer to MEPH Engineers information
Ironmongery:	Refer to Schedule		

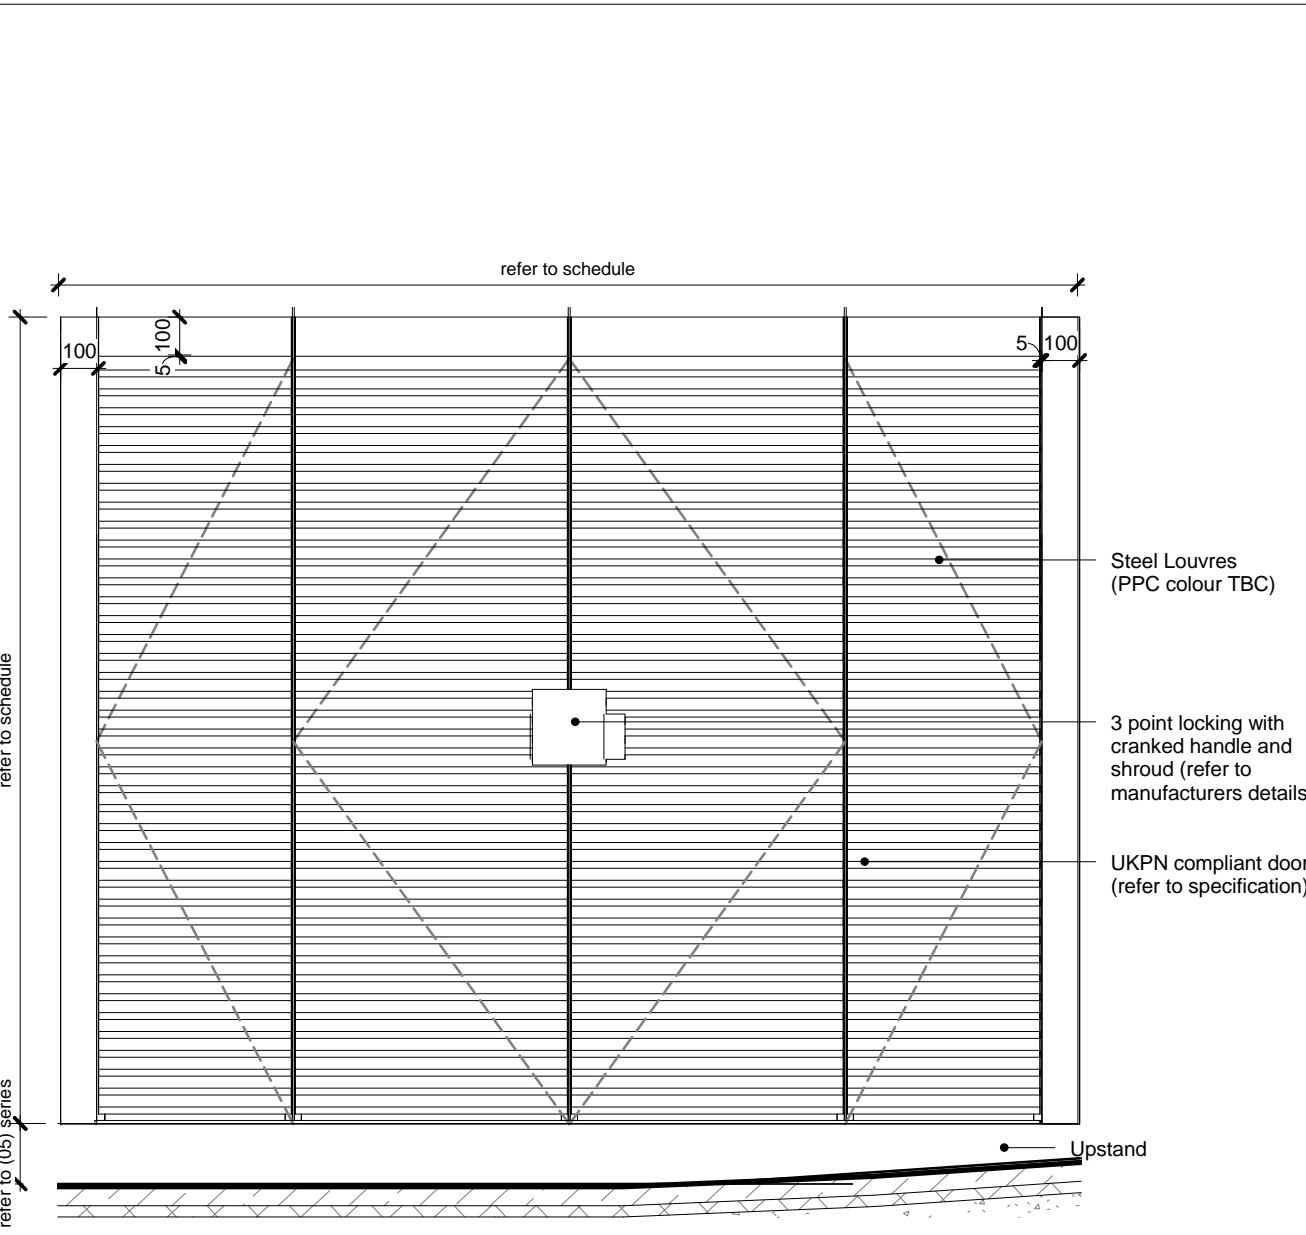

NBS Reference: DT10 (L20/480)

NBS Description:	UKPN Door (UKPN Approved)	Fire Rating:	N/A
Door Type:	DT10	Security:	UKPN Substation Padlock
Opening Direction:	Outward	Notes:	As supplied by Sunray and approved by UKPN
Ironmongery:	As supplied by Sunray and approved by UKPN		

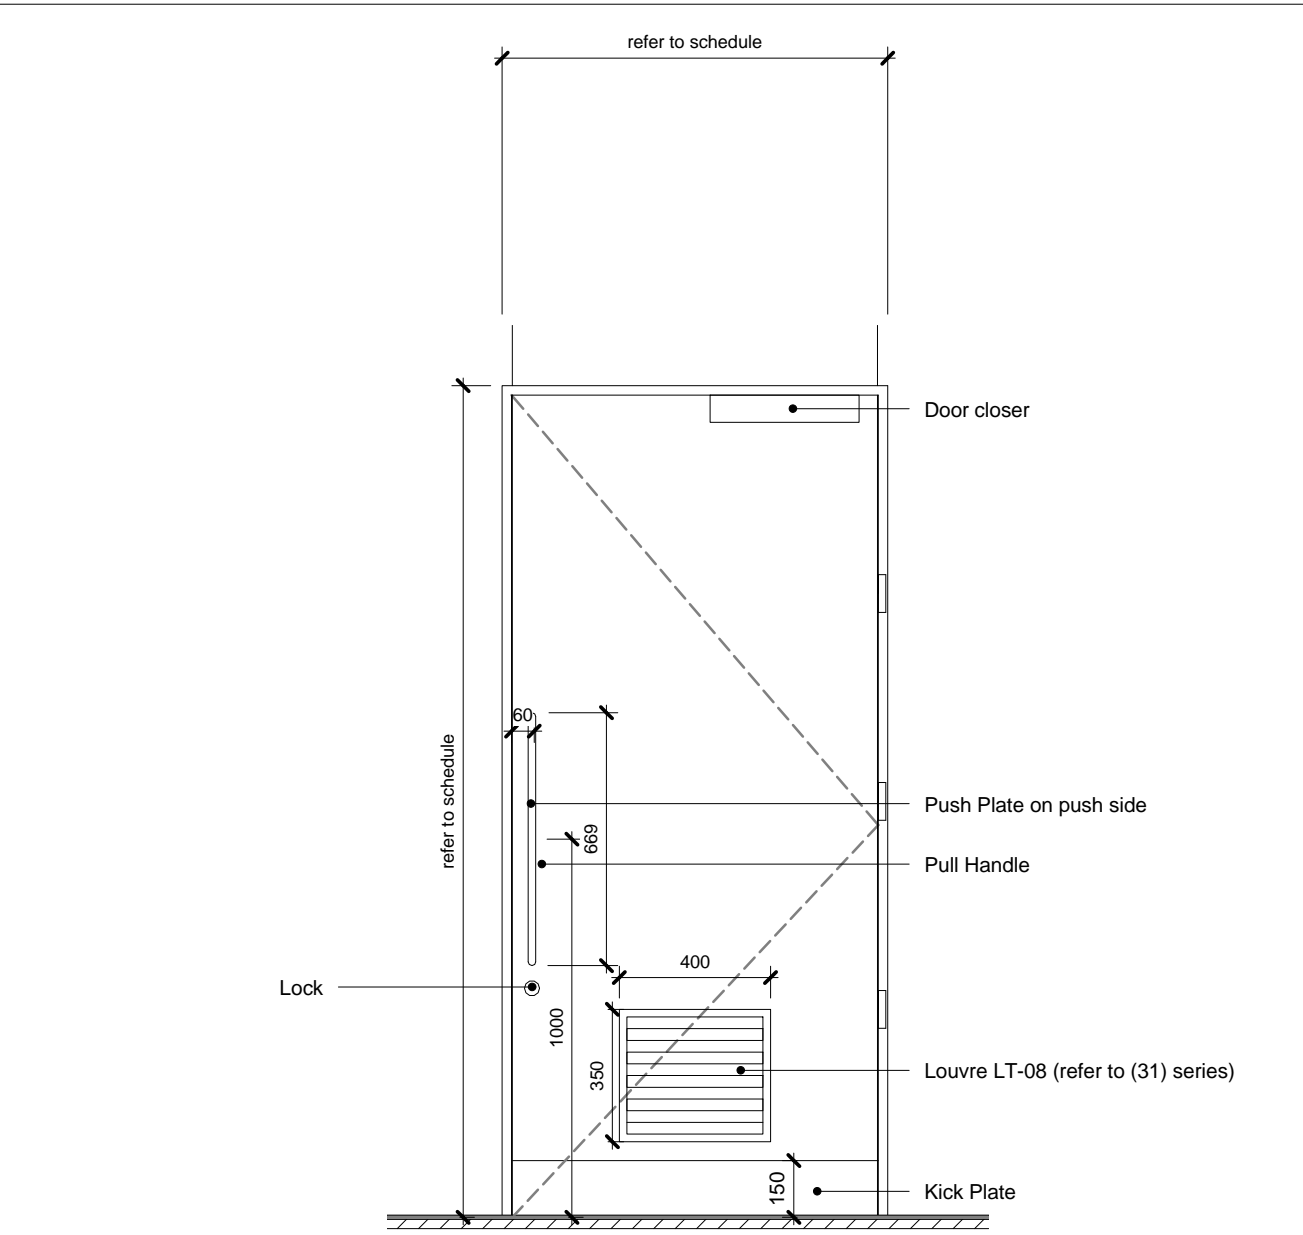

NBS Reference: DT11 (L20/412a)

NBS Description:	Internal Door (Waste Room)	Fire Rating:	FD 60 S
Door Type:	DT11	Security:	Secure Access (for tenants only)
Opening Direction:	Refer to Schedule	Notes:	Louvre required (refer to (31) series)
Ironmongery:	Refer to Schedule		

LOCATION

ALFORD HALL MONAGHAN MORRIS
ARCHITECTS Ltd
5-23 OLD STREET, LONDON, EC1V 9HL
TEL 020 7251 5261 FAX 020 7251 5123 WEB WWW.AHMM.CO.UK

job title
CAMDEN LOCK VILLAGE
drawing title / location
Door Elevation Matrix 1

drawn by	checked	scale	status
MP	FG	1 : 20 @ A1	For Coordination
project	drawing no.	revision	
14045	AX_(32)_ 1020	F05	