



SOUTH WALL

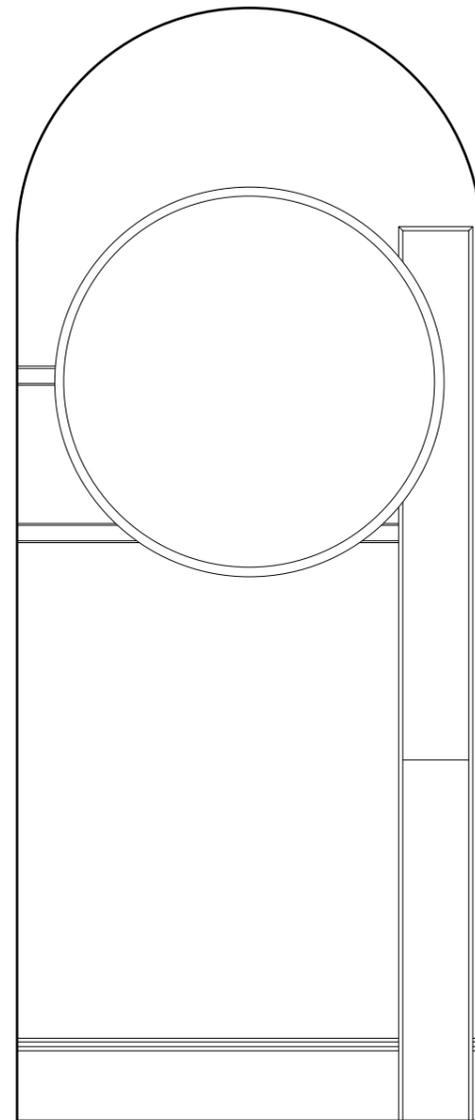

WEST WALL

NOTES:

- ① Existing swing doors to be carefully dismantled and set aside for the removal of the stained glass sections. Fanlight above to be carefully removed, but not de-glazed.
- ② Allow for piecing in the existing timber frame, where the fanlight has been removed, say 25 x 75 x 45mm moulded h/w timber sections to match adjacent.
- ③ Subject to confirmation from the Architect (post Historic Paint Analysis findings) Contractor to carefully remove the existing internal window, being careful to retain the glass and frame intact, label and hand to the Museum for their Building Archive. Contactor to allow for making good the plastered surfaces. NB the moulding timber cill beneath the window is to be retained as existing.

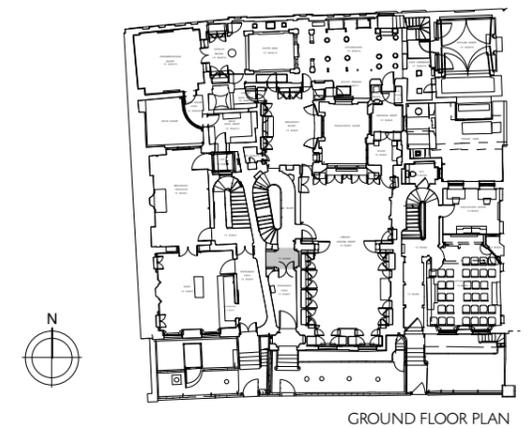

GROUND FLOOR PLAN

SIR JOHN SOANE'S MUSEUM
OPENING UP THE SOANE

INNER HALL (13RmG/8) DRWG 506MP3/DD163
SOUTH & WEST WALLS SCALE 1:20 @ A3
AS PROPOSED DATE AUG. 2014

JULIAN HARRAP
ARCHITECTS LLP

95 KINGSLAND ROAD LONDON E2 8AG
PHONE 020 7729 5111 FAX 020 7739 8306

