

Dimensions : 2680(W) x 2400(H)








Diagram illustrating typical pavement types, showing layers and their thicknesses:


- 50mm Concrete or natural stone
- 30mm Mortar
- 150mm Pavement quality concrete
- 150mm Granular sub-base
- 400mm Capping

Refer to Walsh information

T01	18/12/15	Issued for ERs
REV	DATE	DESCRIPTION

CONSULTANTS	
CLIENT:	Stanley Sidings
CONTRACTOR:	Mace
STRUCTURAL ENGINEER:	Walsh Group
MECHANICAL ENGINEER:	Hoare Lea
COST CONSULTANT:	Gardiner & Theobald
PROJECT MANAGER:	Gardiner & Theobald
ACOUSTIC CONSULTANT:	Anup
TRANSPORT CONSULTANT:	Anup
PLANNING CONSULTANT:	Gerald Eve
LANDSCAPE ARCHITECT:	Fabrik
CDM CO-ORDINATOR:	MSA Safety

NOTE	<p>1. Do not scale from this drawing.</p> <p>2. All dimensions to be checked on site by the contractor and such dimensions to be his responsibility.</p> <p>Report all drawing errors, omissions and discrepancies to the architect.</p> <p>3. This document may be issued in an uncontrolled CAD format to enable others to use it as background information to make alterations and/or additions. In that instance the file will be accompanied by a PDF version. It is for those making such alterations and additions to ensure that they make use of current background information.</p> <p>4. AHMM Ltd accepts no liability for any such alterations or additions to the background information or arising out of changes to background information which occur prior to alterations of additions being made.</p>
------	---

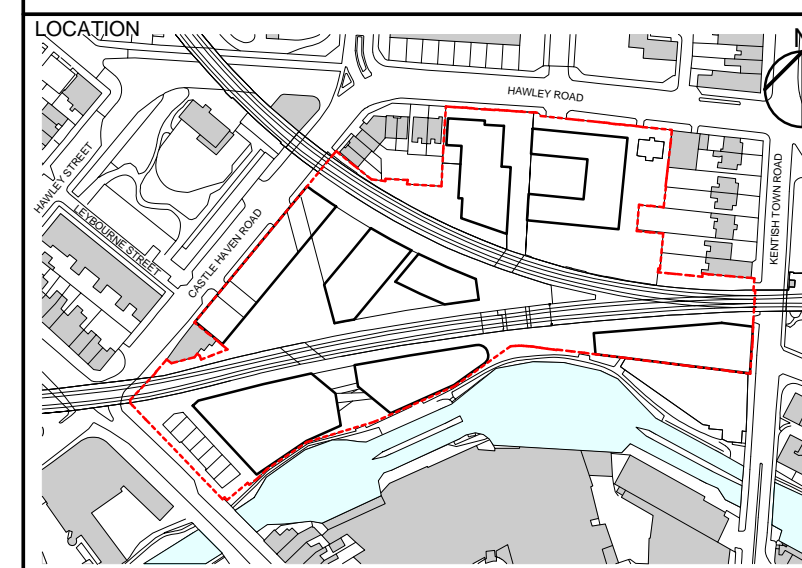

ALLFORD HALL MONAGHAN MORRIS
ARCHITECTS Ltd
5-23 OLD STREET, LONDON, EC1V 9HL
TEL 020 7251 5261 FAX 020 7251 5123 WEB WWW.AHMM.CO.UK

Camden Lock Village

drawing title / location
Gate 02

drawn by FG	checked AH	scale As indicated @ A1	status ERs Issue
project 14045		drawing no. MX_(67)_1114	revision T0