



0 METRES 1 2 3 4 5

FLOOR FINISH LEGENDS.
DIRT EXCLUDING MATTING. SPECIFICATION:
VINYL TILED FLOORING SPECIFICATION:
MAIN CONTRACTOR TO APPLY A DURABLE HIGH VISIBILITY FLOOR PAINT TO HATCHED AREA TO FORM PROTECTED ESCAPE ROUTE.
PREPARE SUB-FLOOR AND APPLY LATEX LEVELING COMPOUND READY TO RECEIVE NEW FLOORING. LAY NEW 'NATURAL OAK' TIMBER EFFECT VINYL FLOOR IN ACCORDANCE WITH POUNDLAND STANDARD SPECIFICATION
PREPARE SUB-FLOOR AND APPLY LATEX LEVELING COMPOUND READY TO RECEIVE NEW FLOORING. LAY NEW 'BASKET OAK' TIMBER EFFECT VINYL FLOOR IN ACCORDANCE WITH POUNDLAND STANDARD SPECIFICATION
PARTITIONING LEGENDS.
EXISTING PARTITIONS
NEW, NON FIRE RATED/ NEW DRY LINING OR STUDWORK BOXING OUT TO FORM WALL BAYS OR LINE EXISTING WALLS.
PARTITIONS TO PROVIDE HALF HOUR FIRE RESISTANCE, OR ONE HOUR AS INDICATED.

SYMBOL	SYMBOL DESCRIPTION
	MOE SYMBOLS LEGEND.
	2Kg. CARBON DIOXIDE FIRE EXTINGUISHER MOUNTED TO WALL ON DECORATED MDF PATRASS WHERE REQUIRED 760 mm AFFL. EXTINGUISHER TO COMPLY WITH BS 5306-8:2000.
\ ▼	6 LITRE FOAM FIRE EXTINGUISHER MOUNTED TO WALL ON DECORATED MDF PATRASS WHERE REQUIRED 760 mm AFFL. EXTINGUISHER TO COMPLY WITH BS 5306-8:2000.
FB	FIRE BLANKET TO BS EN3 OR BS 5423
N1	GENERAL FIRE ROUTINE NOTICE FIXED TO CONVENIENT POSITION.
N2	NOTICE TO READ 'AREA TO BE KEPT CLEAR AT ALL TIMES'.
N3	NOTICE ON DOOR TO READ 'KEEP LOCKED SHUT'.
N4	NOTICE APPLIED TO DOOR TO READ' PUSH BAR TO OPEN'.
N5	NOTICE ON BOTH SIDES OF DOOR TO READ 'FIRE ESCAPE KEEP CLEAR'.
N6	NOTICE ON BOTH SIDES OF DOOR TO READ 'FIRE DOOR KEEP SHUT'.
RM	- EMERGENCY EXIT DIRECTIONAL NOTICE 'RUNNING MAN'.
D2	NEW DOOR/No/ IDENTIFICATION. E.G. DOOR TO BE HALF HOUR FIRE RATED

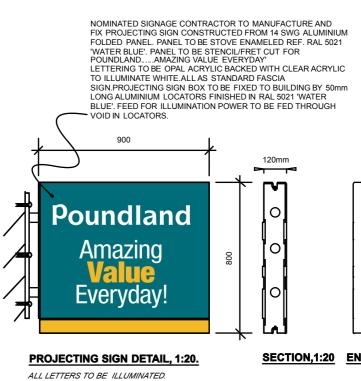

EXISTING SECTION A-A THRU' SHOP FRONT, 1:20.

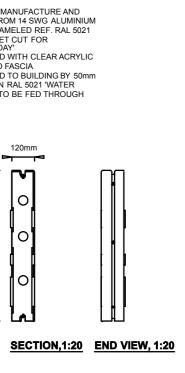

SALES AREA WALL FINISHES SHOPFRONT ENTRANCE, WALLS AND COLUMNS: TO THE EXPOSED WALL AREAS AT THE SHOPFRONT ENTRANCE AND SIDE WALL, ETC. DECORATE THROUGHOUT AS FINISHES SCHEDULE 01 & 02, AND AS PER STANDARD DETAIL DRAWINGS STD/ELEV SHEETS 02, 03, 04 & 05. PERIMETER WALLS ALL PERIMETER WALLS NOT COVERED BY SHELVING SYSTEM AND ABOVE WALL BAYS ARE TO BE DECORATED AS THE FINISHES SCHEDULE 01 & 02, AND AS THE STANDARD DETAIL DRAWINGS STD/ELEV SHEETS 01

OFF SALES TO THE WALLS WITHIN THE BUFFER AREA AND CORRIDOR, PREPARE AND FINISH AS THE FINISHES SCHEDULE 01& 02. OFF-SALES JOINERY (NEW AND EXISTING). ALL OFF-SALES FLOOR SKIRTINGS, ARCHITRAVES AND FRAMES TO BE FINISHED AS THE FINISHES SCHEDULE 01 & 02. FIRE RATED PARTITION CONSTRUCTION. WHERE SHOWN ON THE DRAWINGS, SUPPLY AND INSTALL FULL HEIGHT METAL STUD PARTITIONS TO THE FOLLOWING SPECIFICATION, TO PROVIDE 1 HOUR FIRE RESISTANCE. FOR EXACT CONSTRUCTION DETAILS, REFER TO MAIN CONTRACT SPECIFICATION.

FLOORING REFER TO FINISHES SCHEDULE STD/FINISHES - 01,02, LAY ACCORDING TO MANUFACTURERS RECOMMENDATIONS. SALES AREA FLOOR EXISTING CERAMIC TILING TO BE RETAINED, FULLY PROTECTED DURING SHOP FITTING WORKS AND THOROUGHLY CLEANED ON COMPLETION OF WORKS.

OFF SALES AREAS REFER TO FINISHES SCHEDULE STD/FINISHES - 01.02 AND STANDARD DETAIL DRAWINGS STD/WELF SHEETS 07,09 FOR FLOOR FINISHES TO CASH-CANTEEN AND DISABLED WC. TO THE BUFFER AREA FLOOR MAIN CONTRACTOR TO APPLY TWO COAT EPOXY FLOOR PAINT AS FINISHES SCHEDULES 01 & 02. WHERE INDICATED THE MAIN CONTRACTOR IS TO SUPPLY AND FIT ACROVYN OR ALUMINIUM CHEQUER PLATE TO WALLS AND INTERLOCKING PLASTIC TO FLOOR.

GENERAL DECORATION. REFER TO FINISHES SCHEDULE STD/FINISHES - 01,02

SHELVING SUMMARY			
1220mm WALL BAYS 570mm DEEP BASE SH		0	
1003mm WALL BAYS 570mm DEEP BASE SH	ELF	0	
610mm WALL BAYS 570mm DEEP BASE SHE	ELF	0	
1220mm WALL BAYS 470mm DEEP BASE SH	ELF	34	
1003mm WALL BAYS 470mm DEEP BASE SH	ELF	3	
610mm WALL BAYS 470mm DEEP BASE SHE	ELF	4	
1220mm GONDOLA BAYS 570mm DEEP BAS	E SHELF	34	
1003mm GONDOLA BAYS 570mm DEEP BAS	E SHELF	0	
610mm GONDOLA BAYS 570mm DEEP BASE	SHELF	0	
1220mm GONDOLA BAYS 370mm DEEP BAS	E SHELF	0	
1003mm GONDOLA BAYS 500mm DEEP BAS	E SHELF	0	
610mm GONDOLA BAYS 500mm DEEP BASE	SHELF	0	
GONDOLA ENDS		6	
PLINTHS			
CHILLER		2	
1220mm LOW LEVEL BAYS 470mm DEEP BAS	E SHELF	2	
1003mm LOW LEVEL BAYS 470mm DEEP BASE SHELF			
10mm LOW LEVEL BAYS 470mm DEEP BASE SHELF		2	
CASH DESKS	5		
TOTAL GONDOLAS/WALL BAYS/CHILLERS/PLINTHS			
AREA SCHEDULE	SQ. M	SQ. FT.	
TOTAL GROUND FLOOR AREA	291.9	3140	
TOTAL BASEMENT FLOOR AREA	221.6	2384	
RETAIL SALES	213.4	2296	
TOTAL GROSS FLOOR AREA	513.5	5525.26	
CERTIFICATION			

ALL CERTIFICATION, INCLUDING ELECTRICAL ALL CERTIFICATION, INCLODING ELECTRICAL INSTALLATION, EMERGENCY LIGHTING COMPLETION, FIRE ALARM COMPLETION AND SPRINKLER INSTALLATION (IF APPLICABLE) ARE TO BE DULY COMPLETED AND FORWARDED TO DESIGN CLD, AS A MATTER OF URGENCY ON COMPLETION OF THE WORKS.

CDM RISK ASSESSMENT SUMMARY THIS PROJECT HAS BEEN ASSESSED AND WE BELIEVE THERE ARE NO SIGNIFICANT RISKS IN THE DESIGN THATA COMPETENT SHOPFITTER WOULD NOT BE ABLE TO OVERCOME.

